





YOU NEED IT
WE'VE GOT IT



FITTINGS

MORRISPRODUCTS.COM



YOU NEED IT
WE'VE GOT IT

MORRIS PRODUCTS

was founded in 1994, in Queensbury, NY. Originally created as a supplier of electrical products – wiring devices, lugs and connectors, cable ties and other accessories – Morris' mission was, and remains, to serve the needs of electrical distributors. With a staff of 2 office workers, and 2 warehouse workers, Morris Products soon outgrew its small location, and expanded to a much larger facility in the late 1990s. With that growth, Morris Products expanded with the addition of a full offering of wire management products, compression and mechanical connectors, conduit fittings, and LED Lighting. In 2016, Morris was acquired by DiversiTech Corporation, adding to a strong family of brands for the electrical and HVAC markets.

Today, Morris Products operates out of a state-of-the-art 65,000 square foot facility in Queensbury, NY, and offers electrical distributors more than 8,000 items in inventory, spanning 30 product categories. In addition to the main facility, MORRIS supplies electrical wholesalers from their west coast warehouse in Adelanto, CA, as well as numerous regional rep warehouses.

As a company, we maintain a laser focus on customer service with same day/next day shipping, allowing broken cartons, and no minimum orders. Experience the Morris Advantage, and let us earn your business.

CONNECTORS



GROUNDING



TAPE



WIRE MANAGEMENT



FITTINGS



ELECTRICAL BOXES



MOUNTING



HVAC



MOTORS & CONTROLS



CEMENTS / FLASHINGS



TOOLS



WIRING DEVICES




TABLE OF CONTENTS

FITTINGS

RIGID FITTINGS & ELBOWS	PG: 1-10
EMT FITTINGS & ELBOWS	PG: 11-18
PVC FITTINGS & ELBOWS	PG: 19-24
CONDUIT BODIES	PG: 23-34
LIQUID TIGHT CONDUIT & LIQUID TIGHT FITTINGS	PG: 35-40
BUSHINGS & KNOCKOUT PLUGS	PG: 41-45
CABLE CORD GRIPS	PG: 46-49
NM, FLEX & BX CONNECTORS	PG: 50-58
SERVICE ENTRANCE	PG: 59-62
BLANKS w/ KO PLUGS	PG: 63-64
CONDUIT & CABLE STRAPS	PG: 65-67
STRUT ACCESSORIES	PG: 68-73
CABLE FASTENINGS	PG: 74-75




Malleable Rigid Set Screw Box Connector



- Malleable Iron
- Concrete Tight
- Male Hub Thread (NPT)
- Zinc Finish

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4340	1/2"	1.30"	0.75"	1.10"	25	250
I4341	3/4"	1.40"	0.91"	1.33"	25	250
I4342	1"	1.54"	0.96"	1.61"	25	100
I4343	1-1/4"	1.97"	1.30"	1.95"	5	50
I4344	1-1/2"	2.09"	1.40"	2.18"	5	50
I4345	2"	2.32"	1.57"	2.67"	-	20


Malleable Rigid Set Screw Couplings

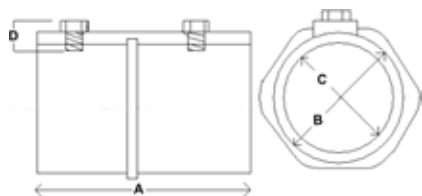

- Malleable Iron
- Concrete Tight
- Zinc Finish

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I4350	1/2"	1.46"	1.10"	0.86"	0.63"	25	250
I4351	3/4"	1.40"	1.33"	1.05"	0.63"	25	250
I4352	1"	1.93"	1.61"	1.36"	0.63"	10	100
I4353	1-1/4"	1.97"	1.95"	1.69"	0.63"	5	50
I4354	1-1/2"	2.09"	2.18"	1.90"	0.63"	5	50
I4355	2"	2.32"	2.67"	2.40"	0.63"	-	20
I4356	2-1/2"	3.73"	3.45"	2.92"	0.63"	-	12
I4357	3"	4.10"	3.95"	3.52"	0.63"	-	12
I4358	3-1/2"	4.52"	4.45"	4.10"	0.63"	-	6
I4359	4"	5.62"	5.01"	4.52"	0.63"	-	6

Rigid Short Radius Elbows



- For Connecting Rigid Conduit or IMC to an Outlet Box in Tight Radius Applications
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4408	1/2"	0.95"	0.95"	25	250
I4409	3/4"	1.16"	1.00"	15	150


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Rigid Steel Compression Box Connector

- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4360	1/2"	1.37"	0.50"	1.22"	20	200
I4361	3/4"	1.44"	0.53"	1.46"	10	100
I4362	1"	1.72"	0.67"	1.72"	5	50
I4363	1-1/4"	1.93"	0.68"	2.15"	5	50
I4364	1-1/2"	2.03"	0.72"	2.36"	-	12
I4365	2"	2.02"	0.72"	2.89"	-	12



Rigid Steel Compression Insulated Box Connector

- Zinc Plated Steel
- Insulated Throat
- Concrete Tight
- Male Hub Thread (NPT)


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4370	1/2"	1.37"	0.51"	1.22"	20	200
I4371	3/4"	1.44"	0.53"	1.46"	10	100
I4372	1"	1.72"	0.67"	1.72"	5	50
I4373	1-1/4"	1.93"	0.68"	2.15"	5	50
I4374	1-1/2"	2.03"	0.72"	2.36"	-	12
I4375	2"	2.02"	0.72"	2.89"	-	12



Rigid Steel Compression Couplings

- Zinc Plated Steel
- Concrete Tight

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4380	1/2"	1.83"	1.22"	10	100
I4381	3/4"	1.97"	1.46"	10	100
I4382	1"	2.11"	1.72"	5	50
I4383	1-1/4"	2.39"	2.15"	5	50
I4384	1-1/2"	2.52"	2.36"	-	12
I4385	2"	2.40"	2.89"	-	5




Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Rigid Steel Couplings



- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)




CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX
		LENGTH	OD	
I4387	1/2"	1.63"	1.01"	100
I4388	3/4"	1.64"	1.25"	50
I4389	1"	1.97"	1.53"	30
I4390	1-1/4"	2.03"	1.87"	25
I4391	1-1/2"	2.06"	2.16"	25
I4392	2"	2.13"	2.65"	20
I4393	2-1/2"	3.19"	3.25"	12
I4394	3"	3.31"	3.87"	12
I4395	3-1/2"	3.41"	4.50"	12
I4396	4"	3.52"	4.88"	6
I4397	5"	3.95"	6.00"	2
I4398	6"	4.25"	7.20"	1

Malleable Rigid 3-Piece Couplings



- Used to Join 2 lengths of Threaded Conduit when Neither Can Be Rotated
- Threaded (NPT) for Rigid Conduit and IMC
- Concrete Tight

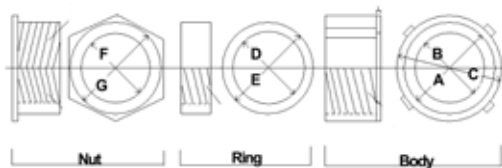


CAT. NO.	TRADE SIZE	DIMENSIONS								INNER BOX	OUTER BOX
		A	B	C	D	E	F	G			
I4440	1/2"	1.01"	0.869"	1.30"	0.788"	0.981"	0.775"	1.05"		20	200
I4441	3/4"	1.20"	1.10"	1.55"	.970"	1.19"	0.965"	1.25"		10	100
I4442	1"	1.52"	1.33"	1.78"	1.22"	1.50"	1.23"	1.58"		5	50
I4443	1-1/4"	1.91"	1.69"	2.20"	1.58"	1.85"	1.56"	1.90"		5	50
I4444	1-1/2"	2.15"	1.93"	2.50"	1.83"	2.10"	1.78"	2.20"		3	30
I4445	2"	2.65"	2.40"	3.08"	2.25"	2.58"	2.25"	2.75"		-	20
I4446	2-1/2"	3.20"	2.90"	3.75"	2.70"	3.10"	2.70"	3.31"		-	10
I4447	3"	3.85"	3.58"	4.40"	3.35"	3.82"	3.30"	4.40"		-	5
I4448	3-1/2"	4.09"	4.05"	5.04"	4.10"	4.15"	4.00"	4.90"		-	5
I4449	4"	4.89"	4.55"	5.40"	4.30"	4.85"	4.33"	5.02"		-	2
I4450	5"	5.89"	5.55"	6.75"	5.43"	5.84"	5.43"	5.93"		-	1
I4451	6"	6.93"	6.62"	7.62"	6.50"	6.81"	6.50"	6.87"		-	1

Malleable Rigid Split Couplings



- A Neoprene Gasket provides a Concrete Tight Seal at the Joint
- Use where Conduit Runs are Closely Spaced; or Conduit is tight against Wall, Ceiling or other Obstruction
- Use where Conduits Cannot be Rotated



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4452	2"	2.75"	2.04"	3.30"	5	25
I4453	2-1/2"	3.20"	2.98"	4.23"	2	10
I4454	3"	3.85"	3.14"	4.85"	2	10
I4455	3-1/2"	4.48"	3.26"	5.36"	1	5
I4456	4"	4.83"	3.34"	6.07"	1	5



90° Galvanized Rigid Conduit Elbows



CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
16101	90°	1/2"	-	-	-	50
16102	90°	3/4"	-	-	-	50
16103	90°	1"	-	-	-	25
16104	90°	1-1/4"	-	-	-	20
16105	90°	1-1/2"	-	-	-	15
16106*	90°	2"	-	-	-	10
16107*	90°	2"	24"	35"	11"	108
16108*	90°	2"	36"	48"	12"	108
16109*	90°	2"	48"	60"	12"	108
16110*	90°	2-1/2"	-	-	-	50
16111*	90°	2-1/2"	24"	35"	11"	70
16112*	90°	2-1/2"	36"	48"	12"	70
16113*	90°	2-1/2"	48"	60"	12"	108
16114*	90°	3"	-	-	-	35
16115*	90°	3"	24"	35"	11"	48
16116*	90°	3"	36"	48"	12"	48
16117*	90°	3"	48"	60"	12"	48
16118*	90°	3-1/2"	-	-	-	35
16119*	90°	4"	-	-	-	35
16120*	90°	4"	24"	35"	11"	40
16121*	90°	4"	36"	48"	12"	40
16122*	90°	4"	48"	60"	12"	40

* Must Ship LTL Freight; \$750 Order to qualify for freight allowed



45° Galvanized Rigid Conduit Elbows

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
16151	45°	1/2"	-	-	-	50
16152	45°	3/4"	-	-	-	50
16153	45°	1"	-	-	-	25
16154	45°	1-1/4"	-	-	-	20
16155	45°	1-1/2"	-	-	-	15
16156*	45°	2"	-	-	-	10
16157*	45°	2"	24"	16"	12"	108
16158*	45°	2"	36"	19"	12"	108
16159*	45°	2"	48"	23"	12"	108
16160*	45°	2-1/2"	-	-	-	50
16161*	45°	2-1/2"	24"	16"	12"	70
16162*	45°	2-1/2"	36"	19"	12"	70
16163*	45°	2-1/2"	48"	23"	12"	70
16164*	45°	3"	-	-	-	35
16165*	45°	3"	24"	16"	12"	48
16166*	45°	3"	36"	19"	12"	48
16167*	45°	3"	48"	23"	12"	48
16168*	45°	3-1/2"	-	-	-	35
16172*	45°	4"	-	-	-	35
16173*	45°	4"	24"	16"	12"	40
16174*	45°	4"	36"	19"	12"	40
16175*	45°	4"	48"	23"	12"	40

* Must Ship LTL Freight; \$750 Order to qualify for freight allowed



22-1/2° Galvanized Rigid Conduit Elbows

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
RIG05022	22-1/2°	1/2"	4"	7-3/4"	1-1/2"	50
RIG07522	22-1/2°	3/4"	4-1/2"	8-5/8"	1-3/4"	50
RIG10022	22-1/2°	1"	5-3/4"	10-5/8"	2-1/8"	25
RIG12522	22-1/2°	1-1/4"	7-1/4"	12-1/4"	2-1/2"	20
RIG15022	22-1/2°	1-1/2"	8-1/4"	14-1/2"	2-7/8"	15
RIG20022*	22-1/2°	2"	9-1/2"	17-3/8"	23-1/2"	10
RIG25022*	22-1/2°	2-1/2"	10-1/2"	19-1/4"	3-7/8"	50
RIG30022*	22-1/2°	3"	13"	24-1/8"	4-3/4"	35
RIG35022*	22-1/2°	3-1/2"	15"	28-7/8"	5-3/4"	35
RIG40022*	22-1/2°	4"	16"	29"	7-7/8"	35
RIG40022R48*	22-1/2°	4"	48"	39-1/2"	9-1/2"	40

* Must Ship LTL Freight; \$750 Order to qualify for freight allowed

WWW.MORRISPRODUCTS.COM



- Galvanized
- Rigid & IMC
- NPT Thread




- Galvanized
- Rigid & IMC
- NPT Thread



- Galvanized
- Rigid & IMC
- NPT Thread




EMT/RIGID To BOX Combination Pulling Elbow - Zinc Die Cast



- Used to Connect a run of EMT, Threaded Rigid or IMC conduit to a Box at a 90° Bend
- Threaded and Set Screw Conduit Entrance
- Removable Aluminum Cover and Neoprene Gasket
- Assembled with Zinc Die Cast Locknut
- Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15040	1/2"	1.31"	1.01"	2.40"	1.78"	20	200
15041	3/4"	1.44"	1.19"	2.66"	2.14"	15	150
15042	1"	1.94"	1.53"	3.66"	3.24"	6	60


EMT/RIGID To EMT/RIGID Combination Pulling Elbow - Zinc



- Used to facilitate pulling conductors through a sharp bend in a run of EMT, Threaded Rigid or IMC conduit
- Threaded and Set Screw Conduit Entrance
- Removable Aluminum Cover and Neoprene Gasket
- Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15044	1/2"	1.37"	1.01"	2.63"	1.78"	20	200
15045	3/4"	1.43"	1.23"	2.73"	2.14"	15	150

Rigid to Rigid Pull Elbows - Zinc Die Cast



- For use as a Wire Pulling Elbow to Facilitate Wire Pulling on a Sharp Bend in run of Threaded Rigid or IMC Conduit
- Removable Cover and Gasket
- Furnished with Neoprene Gasket and Cover
- Rain Tight

CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
14400	1/2"	1.31"	1.03"	0.99"	100
14401	3/4"	1.39"	1.30"	1.26"	50
14402	1"	1.96"	1.55"	1.52"	30
14403	1-1/4"	2.32"	1.90"	1.91"	20


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Rigid to Box Pull Elbows - Zinc Die Cast

- For Connecting Threaded Rigid Conduit or IMC to Box or Enclosures to Form 90° bend
- Removable Cover and Gasket
- Furnished with Neoprene Gasket and Cover
- Rain Tight


CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
I4404	1/2"	1.34"	1.03"	0.97"	100
I4405	3/4"	1.40"	1.30"	1.19"	50
I4406	1"	1.97"	1.55"	1.51"	30
I4407	1-1/4"	2.32"	1.90"	1.91"	20



Straight Malleable Concrete Slab Inserts For Threaded Rigid Conduit

- Allows In-Slab Ceiling Drops & Floor Mounts in Poured Concrete
- Provides Flush Threaded Conduit Hub for mounting, and pulling
- Design allows In-Slab Conduit System Prefabrication


CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
I4420	1/2"	1.50"	1.75"	1.25"	20
I4421	3/4"	2.72"	2.00"	1.75"	20
I4422	1"	2.50"	3.25"	1.50"	10



90° Malleable Concrete Slab Inserts For Threaded Rigid Conduit

- Allows In-Slab Ceiling Drops & Floor Mounts in Poured Concrete
- Provides Flush Threaded Conduit Hub for mounting, and pulling
- Allows In-Slab Conduit System Prefabrication - Flush Design
- Designed for 90° Bends Through Conduit Runs


CAT. NO.	TRADE SIZE	DIMENSIONS				OUTER BOX
		A	B	C	D	
I4423	1/2"	1.50"	1.75"	3.12"	3.62"	20
I4424	3/4"	2.75"	2.00"	3.06"	3.68"	20
I4425	1"	2.50"	3.75"	2.93"	3.68"	10



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Rigid Offset Nipples - Zinc Die Cast



- Use as an Offset Connector between Two Enclosures
- To Offset the Axis of Raceways 3/4"

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4460	1/2"	2.42"	0.59"	0.75"	35	350
I4461	3/4"	2.42"	0.78"	0.75"	20	200
I4462	1"	2.58"	1.00"	0.75"	15	150
I4463	1-1/4"	2.83"	1.32"	0.75"	5	50
I4464	1-1/2"	2.87"	1.53"	0.75"	5	50
I4465	2"	3.11"	1.99"	0.75"	3	30
I4466	2-1/2"	4.13"	2.35"	0.75"	-	18
I4467	3"	4.47"	2.95"	0.75"	-	15


1" Long Conduit Speed Nipple - Zinc Die Cast



- Use with Rigid Coupling to Terminate Threaded Conduit to a Knockout, Box or Enclosure, where space is limited within the box
- Use with a Locknut to provide a Short Raceway between Boxes and enclosures

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4502	1/2"	1.04"	1.00"	100	1,000
I4503	3/4"	1.34"	1.00"	50	500
I4504	1"	1.63"	1.00"	25	250

Rigid Nipples - Zinc Die Cast




- Use with Rigid Coupling to Terminate Threaded Conduit to a Knockout, Box or Enclosure, where space is limited within the box
- Used with a Locknut to provide a Short Raceway between Boxes and Enclosures

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4480	1/2"	0.64"	0.98"	100	1,000
I4481	3/4"	0.72"	1.18"	100	1,000
I4482	1"	0.81"	1.50"	50	500
I4483	1-1/4"	0.94"	1.77"	25	250
I4484	1-1/2"	1.07"	2.17"	25	150
I4485	2"	1.08"	2.60"	15	90
I4486	2-1/2"	1.09"	3.09"	-	20
I4487	3"	1.25"	3.71"	-	20
I4488	3-1/2"	1.27"	4.24"	-	10
I4489	4"	1.27"	4.70"	-	10

- Use with Rigid Coupling to Terminate Threaded Conduit to a Knockout, Box or Enclosure where space is limited within the box
- Used with a Locknut to provide a Short Raceway between Boxes and Enclosures
- Insulated Throat

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4490	1/2"	0.68"	0.98"	100	1,000
I4491	3/4"	0.82"	1.18"	100	1,000
I4492	1"	0.85"	1.50"	50	500
I4493	1-1/4"	1.00"	1.77"	25	250
I4494	1-1/2"	1.13"	2.17"	25	150
I4495	2"	1.14"	2.60"	15	90
I4496	2-1/2"	1.16"	3.09"	-	20
I4497	3"	1.33"	3.71"	-	20
I4498	3-1/2"	1.35"	4.24"	-	10
I4499	4"	1.35"	4.70"	-	10



Rigid Steel Nipples

CAT. NO.	TRADE SIZE	INNER BOX
I4600	1/2" X CLOSE	25
I4601	1/2" X 1-1/2"	25
I4602	1/2" X 2"	25
I4605	1/2" X 2-1/2"	25
I4603	1/2" X 3"	25
I4606	1/2" X 3-1/2"	25
I4604	1/2" X 4"	25
I4607	1/2" X 5"	25
I4608	1/2" X 6"	25
I4609	1/2" X 8"	25
I5600	1/2" X 10"	25
I5601	1/2" X 12"	25
I4610	3/4" X CLOSE	25
I4611	3/4" X 1-1/2"	25
I4612	3/4" X 2"	25
I5602	3/4" X 2-1/2"	25
I4613	3/4" X 3"	25
I5603	3/4" X 3-1/2"	25
I4614	3/4" X 4"	25
I5604	3/4" X 5"	25
I5605	3/4" X 6"	25
I5606	3/4" X 8"	25
I5607	3/4" X 10"	25
I5608	3/4" X 12"	25
I4615	1" X CLOSE	25
I4616	1" X 2"	25
I4617	1" X 2-1/2"	25
I4618	1" X 3"	25
I5610	1" X 3-1/2"	25
I4619	1" X 4"	25
I5611	1" X 5"	25
I5612	1" X 6"	25
I5615	1" X 12"	25
I5613	1" X 8"	25
I5614	1" X 10"	25
I4647	1-1/4" X CLOSE	25
I4648	1-1/4" X 2"	25
I4635	1-1/4" X 3"	25
I4636	1-1/4" X 4"	25
I4637	1-1/4" X 6"	25
I5627	1-1/4" X 12"	30
I4638	1-1/2" X CLOSE	25
I4639	1-1/2" X 2"	25
I5630	1-1/2" X 2-1/2"	25

CAT. NO.	TRADE SIZE	INNER BOX
I4640	1-1/2" X 3"	25
I5631	1-1/2" X 3-1/2"	25
I4641	1-1/2" X 4"	25
I5632	1-1/2" X 5"	25
I4650	1-1/2" X 6"	25
I5636	1-1/2" X 12"	20
I4642	2" X CLOSE	25
I4643	2" X 3"	25
I4644	2" X 4"	25
I4645	2" X 5"	25
I4646	2" X 6"	25
I5643	2" X 8"	20
I5644	2" X 10"	20
I5645	2" X 12"	15
I5650	2-1/2" X CLOSE	40
I5651	2-1/2" X 3"	40
I5653	2-1/2" X 4"	30
I5655	2-1/2" X 6"	20
I5656	2-1/2" X 8"	10
I5657	2-1/2" X 10"	10
I5658	2-1/2" X 12"	10
I4655	3" X CLOSE	10
I4656	3" X 3"	10
I4657	3" X 4"	10
I4658	3" X 5"	10
I4659	3" X 6"	10
I5661	3" X 8"	7
I5662	3" X 10"	5
I5663	3" X 12"	5
I5670	3-1/2" X CLOSE	5
I5671	3-1/2" X 4"	10
I5672	3-1/2" X 5"	8
I5673	3-1/2" X 6"	8
I5674	3-1/2" X 8"	4
I5675	3-1/2" X 10"	4
I5676	3-1/2" X 12"	4
I4691	4" X CLOSE	20
I4693	4" X 4"	6
I4695	4" X 5"	5
I4697	4" X 6"	5
I5680	4" X 8"	4
I5681	4" X 10"	4
I5682	4" X 12"	4



- Connect Threaded Rigid Conduit
- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)



Conduit Bushings - Zinc Die Cast



- Bushings rounded surface prevents damage to wire insulation during pulling

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4530	1/2"	1.06"	0.41"	140	1400
I4531	3/4"	1.28"	0.41"	100	1,000
I4532	1"	1.54"	0.50"	50	500
I4533	1-1/4"	1.89"	0.54"	30	300
I4534	1-1/2"	2.12"	0.62"	20	200
I4535	2"	2.64"	0.51"	15	150
I4536	2-1/2"	3.23"	0.62"	-	75
I4537	3"	3.82"	0.83"	-	65
I4538	3-1/2"	4.95"	0.85"	-	50
I4539	4"	4.84"	3.95"	-	40

Conduit Bushings with Insulated Throat - Zinc Die Cast



- Bushings rounded surface prevents damage to wire insulation during pulling
- Insulated Throat

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4540	1/2"	1.06"	0.41"	140	1400
I4541	3/4"	1.28"	0.41"	100	1,000
I4542	1"	1.54"	0.50"	50	500
I4543	1-1/4"	1.89"	0.54"	30	300
I4544	1-1/2"	2.12"	0.62"	20	200
I4545	2"	2.64"	0.51"	15	150
I4546	2-1/2"	3.23"	0.62"	-	75
I4547	3"	3.82"	0.83"	-	65
I4548	3-1/2"	4.95"	0.85"	-	50
I4549	4"	4.84"	3.91"	-	40

Grounding Bushing Insulated Throat with Aluminum Lug - Zinc




- Thermoplastic liner prevents damage to wire insulation
- Lug provides for bonding jumper to a neutral bus bar
- Resists corrosion, chemicals, and temperature extremes
- Set-screw provided with each fitting locks bushing in any desired position

CAT. NO.	TRADE SIZE	GROUNDING LUG RANGE	DIMENSIONS			INNER BOX	OUTER BOX
			A	B	C		
I4570	1/2"	#14 - #4	1.04"	0.56"	0.43"	50	500
I4571	3/4"	#14 - #4	1.26"	0.75"	0.49"	40	400
I4572	1"	#14 - #4	1.56"	0.97"	0.55"	25	250
I4574	1-1/4"	#14 - #4	1.95"	1.30"	0.60"	25	250
I4576	1-1/2"	#14 - #2	2.14"	1.48"	0.65"	25	250
I4578	2"	#14 - #2	2.65"	1.81"	0.68"	10	100
I4579	2-1/2"	#14 - #1/0	3.19"	2.30"	0.79"	5	50
I4581	3"	#14 - #1/0	3.82"	2.83"	0.87"	5	50
I4583	3-1/2"	#14 - #2/0	4.28"	3.35"	0.87"	4	40
I4585	4"	#14 - #2/0	4.86"	3.78"	0.91"	4	40

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
21732	1/2"	1.06"	0.43"	100	1,000
21733	3/4"	1.31"	0.43"	100	1,000
21734	1"	1.59"	0.48"	50	500
21735	1-1/4"	1.96"	0.56"	25	250
21736	1-1/2"	2.18"	0.56"	25	250
21737	2"	2.68"	0.59"	20	200
21738	2-1/2"	3.25"	0.72"	-	50
21739	3"	3.87"	0.75"	-	25
21740	3-1/2"	4.37"	0.77"	-	25
21741	4"	5.00"	0.77"	-	10
21742	5"	6.25"	1.00"	-	10
21743	6"	7.50"	1.00"	-	10


Thermoplastic Conduit Bushings

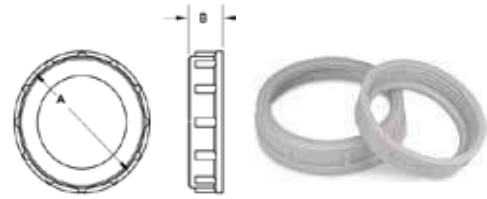

- Use to Protect Conductors in Rigid or IMC Conduit from Abrasion/Damage during Pull
- Rounded surface of bushing prevents damage to wire insulation
- Thermoplastic material-heat, impact & torque resistant

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
14700	2-1/2" X 1"	2.83"	1.22"	-	10
14701	2-1/2" X 1-1/4"	2.83"	1.58"	-	10
14702	2-1/2" X 1-1/2"	2.83"	1.83"	-	10
14703	2-1/2" X 2"	2.83"	2.28"	-	10
14704	3-1/2" X 1-1/2"	3.45"	1.83"	-	10
14705	3-1/2" X 2"	3.45"	2.28"	-	10
14706	3-1/2" X 2-1/2"	3.96"	2.70"	-	10
14707	3-1/2" X 3"	3.96"	3.35"	-	10
14708	4" X 2-1/2"	4.45"	2.70"	-	10
14709	4" X 3-1/2"	4.45"	4.10"	-	10

Malleable Reducing Bushings

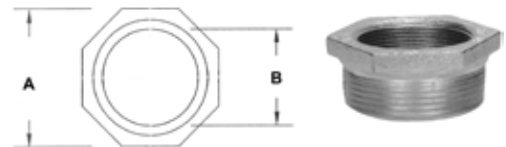

- Reduce the trade size of a tapered entry on a conduit fitting
- Threaded for rigid and IMC condulets, Hex Shoulder
- Rolled edge protects wire insulation

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
14660	1/2" X 3/8"	0.63"	0.91"	100	1,000
14661	3/4" X 1/2"	0.65"	1.02"	100	1,000
14662	1" X 1/2"	0.72"	1.27"	50	500
14663	1" X 3/4"	0.72"	1.27"	50	500
14664	1-1/4" X 1/2"	0.82"	1.62"	10	100
14665	1-1/4" X 3/4"	0.82"	1.62"	25	250
14666	1-1/4" X 1"	0.81"	1.62"	25	250
14667	1-1/2" X 1/2"	0.85"	1.85"	25	100
14668	1-1/2" X 3/4"	0.85"	1.85"	25	100
14669	1-1/2" X 1"	0.85"	1.85"	25	100
14670	1-1/2" X 1-1/4"	0.85"	1.85"	25	250
14671	2" X 1/2"	0.97"	2.23"	10	40
14672	2" X 3/4"	0.97"	2.23"	10	40
14673	2" X 1"	0.97"	2.23"	10	40
14674	2" X 1-1/4"	0.97"	2.23"	10	100
14675	2" X 1-1/2"	0.97"	2.23"	10	100
14676	3" X 1/2"	1.57"	3.43"	-	10
14678	3" X 1"	1.57"	3.43"	-	10
14679	3" X 1-1/4"	1.57"	3.43"	-	10
14680	3" X 1-1/2"	1.57"	3.43"	-	10
14681	3" X 2"	1.57"	3.43"	-	10
14682	3" X 2-1/2"	1.57"	3.43"	-	5
14683	4" X 1/2"	1.68"	4.43"	-	5
14684	4" X 3/4"	1.68"	4.43"	-	5
14686	4" X 1-1/4"	1.68"	4.43"	-	5
14687	4" X 1-1/2"	1.68"	4.43"	-	5
14688	4" X 2"	1.68"	4.43"	-	5
14689	4" X 3"	1.68"	4.43"	-	5


Steel Reducing Bushings



- Reduce trade size of tapered entry on a conduit fitting
- Threaded for Rigid Conduit & IMC
- Rolled edge protects wire insulation



EMT Set Screw Connectors - Zinc Die Cast

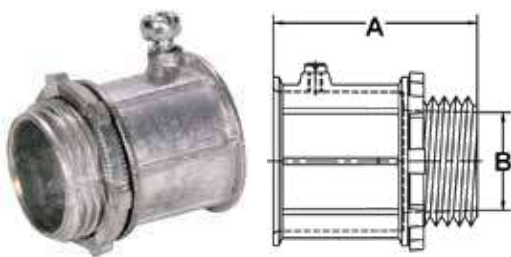


- Concrete Tight (When Taped)
- Die-Cast Zinc, Male hub threads NPS
- Pre-Set/Pre-Staked Combo Head Set-Screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4850	1/2"	1.16"	0.93"	50	500
I4851	3/4"	1.38"	1.17"	25	250
I4852	1"	1.50"	1.42"	25	200
I4853	1-1/4"	1.97"	1.82"	10	100
I4854	1-1/2"	2.26"	2.07"	10	60
I4855	2"	2.56"	2.52"	5	40
I4856*	2-1/2"	3.09"	3.30"	-	12
I4857*	3"	3.37"	3.91"	-	12
I4858*	3-1/2"	3.52"	3.43"	-	6
I4859*	4"	3.76"	4.88"	-	6

* Also UL Listed for use with Rigid & IMC
Uses 2 Set Screws

EMT Set Screw Connectors - Insulated Throat - Zinc Die Cast

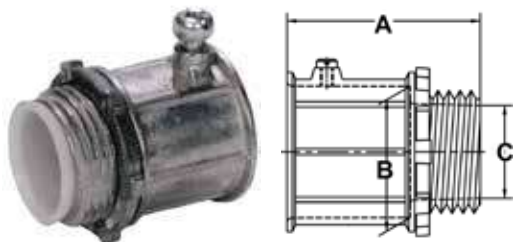

- Insulated Throat
- Concrete Tight (When Taped)
- Die-Cast Zinc, Male hub threads NPS
- Pre-Set/Pre-Staked Combo Head Set-Screws

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4860	1/2"	1.14"	0.72"	0.59"	50	500
I4861	3/4"	1.33"	0.94"	0.78"	25	250
I4862	1"	1.54"	1.18"	1.00"	25	200
I4863	1-1/4"	1.99"	1.53"	1.32"	10	100
I4864	1-1/2"	2.13"	1.76"	1.53"	10	60
I4865	2"	2.44"	2.22"	1.99"	5	40
I4866*	2-1/2"	3.03"	2.92"	2.34"	-	12
I4867*	3"	3.22"	3.55"	2.88"	-	12
I4868*	3-1/2"	3.58"	4.05"	3.31"	-	6
I4869*	4"	3.72"	4.55"	3.86"	-	6

* Also UL Listed for use with Rigid & IMC
Uses 2 Set Screws

EMT Set Screw Couplings - Zinc Die Cast



- Concrete Tight (When Taped)
- Die-Cast Zinc
- Pre-set/Pre-staked Combo Head Set-screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4870	1/2"	1.49"	0.91"	50	500
I4871	3/4"	1.94"	1.18"	25	250
I4872	1"	2.28"	1.41"	20	200
I4873	1-1/4"	2.62"	1.82"	10	100
I4874	1-1/2"	2.91"	2.04"	10	60
I4875	2"	3.48"	2.52"	5	20
I4876*	2-1/2"	4.01"	3.30"	-	12
I4877*	3"	4.46"	3.91"	-	12
I4878*	3-1/2"	4.88"	4.05"	-	6
I4879*	4"	5.25"	4.91"	-	6

* Also UL Listed for use with Rigid & IMC
Uses 2 Set Screws

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



EMT Set Screw Connectors - Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4880	1/2"	0.84"	1.47"	50	500
I4881	3/4"	1.06"	1.57"	25	250
I4882	1"	1.32"	1.86"	20	200
I4883	1-1/4"	1.68"	2.24"	-	25
I4884	1-1/2"	1.91"	2.24"	-	25
I4885	2"	2.37"	2.35"	-	20
I4886*	2-1/2"	3.14"	2.89"	-	12
I4887*	3"	3.77"	2.95"	-	12
I4888*	3-1/2"	4.28"	3.23"	-	6
I4889*	4"	4.78"	3.33"	-	6

* Also for use with Rigid & IMC
Uses 2 Set Screws



- Heavy Steel Walls
- Pre-Set/Pre-Staked Combo Head Set-Screws
- Male NPSM hub threads
- Concrete Tight (When Taped)



EMT Set Screw Connectors - Insulated Throat - Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4890	1/2"	0.84"	1.51"	50	500
I4891	3/4"	1.06"	1.61"	25	250
I4892	1"	1.32"	1.90"	20	200
I4893	1-1/4"	1.68"	2.28"	-	25
I4894	1-1/2"	1.91"	2.28"	-	25
I4895	2"	2.37"	2.40"	-	20
I4896*	2-1/2"	3.14"	2.95"	-	12
I4897*	3"	3.77"	3.02"	-	12
I4898*	3-1/2"	4.28"	3.29"	-	6
I4899*	4"	4.78"	3.39"	-	6

* Also for use with Rigid & IMC
Uses 2 Set Screws




- Insulated Throat
- Heavy Steel Walls
- Pre-Set/Pre-Staked Combo Head Set-Screws
- Male NPSM hub threads
- Concrete Tight (When Taped)



EMT Set Screw Couplings - Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4900	1/2"	0.84"	1.59"	50	500
I4901	3/4"	1.06"	1.80"	25	250
I4902	1"	1.32"	2.04"	10	100
I4903	1-1/4"	1.68"	2.76"	-	25
I4904	1-1/2"	1.91"	2.97"	-	25
I4905	2"	2.37"	3.22"	-	20
I4906*	2-1/2"	3.14"	3.86"	-	12
I4907*	3"	3.77"	4.23"	-	12
I4908*	3-1/2"	4.28"	4.48"	-	6
I4909*	4"	4.78"	4.72"	-	6

* Also for use with Rigid & IMC
Uses 2 Set Screws

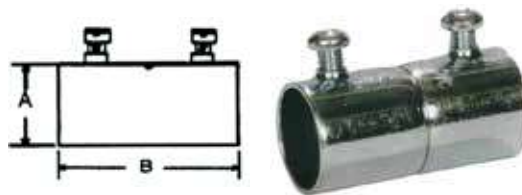


- Use to Join Two Lengths of EMT Conduit together
- Heavy Steel Walls
- Pre-Set/Pre-Staked Combo Head Set-Screws
- Concrete Tight (When Taped)

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



EMT Compression Connectors - Zinc Die Cast




- Male NPSM hub threads
- Concrete tight

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4910	1/2"	1.26"	0.97"	50	500
I4911	3/4"	1.21"	1.26"	25	250
I4912	1"	1.58"	1.52"	15	150
I4913	1-1/4"	1.62"	1.91"	10	100
I4914	1-1/2"	1.87"	2.28"	10	40
I4915	2"	2.146"	2.61"	5	20
I4916*	2-1/2"	2.54"	3.37"	-	12
I4917*	3"	2.54"	3.94"	-	12
I4918*	3-1/2"	2.60"	4.45"	-	6
I4919*	4"	2.60"	1.94"	-	6

* Also UL Listed for use with Rigid & IMC

EMT Compression Connectors - Insulated Throat - Zinc Die Cast




- Male NPSM hub threads
- Concrete tight

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4920	1/2"	1.32"	0.97"	0.59"	50	500
I4921	3/4"	1.27"	1.26"	0.78"	25	250
I4922	1"	1.64"	1.52"	1.00"	15	150
I4923	1-1/4"	1.70"	1.91"	1.32"	10	100
I4924	1-1/2"	1.95"	2.28"	1.53"	10	40
I4925	2"	2.23"	2.61"	1.99"	5	20
I4926*	2-1/2"	2.62"	3.37"	2.35"	-	12
I4927*	3"	2.62"	3.94"	2.95"	-	12
I4928*	3-1/2"	2.68"	4.45"	3.43"	-	6
I4929*	4"	2.68"	4.94"	3.91"	-	6

* Also UL Listed for use with Rigid & IMC

EMT Compression Couplings - Zinc Die Cast



- Concrete tight

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4930	1/2"	1.53"	0.97"	50	500
I4931	3/4"	1.58"	1.26"	25	250
I4932	1"	1.87"	1.52"	15	150
I4933	1-1/4"	2.25"	1.91"	10	100
I4934	1-1/2"	3.18"	2.28"	10	50
I4935	2"	2.44"	2.61"	5	20
I4936*	2-1/2"	3.15"	3.37"	-	12
I4937*	3"	3.15"	3.94"	-	12
I4938*	3-1/2"	3.27"	4.45"	-	6
I4939*	4"	3.27"	4.94"	-	6

* Also UL Listed for use with Rigid & IMC

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678



Steel EMT Compression Connectors

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I4940	1/2"	1.06"	1.37"	1.13"	0.73"	25	250
I4941	3/4"	1.30"	1.46"	1.38"	0.95"	25	250
I4942	1"	1.59"	1.58"	1.72"	1.19"	-	75
I4943	1-1/4"	2.08"	2.05"	2.06"	1.54"	-	25
I4944	1-1/2"	2.27"	2.13"	2.37"	1.77"	-	20
I4945	2"	2.72"	2.24"	2.89"	2.22"	-	10
I4946*	2-1/2"	3.46"	3.27"	3.52"	2.93"	-	8
I4947*	3"	4.02"	3.50"	4.20"	3.58"	-	4
I4948*	3-1/2"	4.62"	3.78"	4.79"	4.05"	-	4
I4949*	4"	5.02"	3.80"	5.32"	4.58"	-	6



- Heavy Steel Walls, Zinc Plated
- Male hub threads - NPSM
- Concrete tight (When Taped)



Steel EMT Compression Connectors - Insulated Throat

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I4950	1/2"	1.06"	1.41"	1.13"	0.73"	25	250
I4951	3/4"	1.30"	1.50"	1.38"	0.95"	25	250
I4952	1"	1.59"	1.61"	1.72"	1.19"	-	75
I4953	1-1/4"	2.08"	2.10"	2.06"	1.54"	-	25
I4954	1-1/2"	2.27"	2.17"	2.37"	1.77"	-	20
I4955	2"	2.72"	2.29"	2.89"	2.22"	-	15
I4956*	2-1/2"	3.46"	3.35"	3.52"	2.93"	-	8
I4957*	3"	4.02"	3.58"	4.20"	3.58"	-	4
I4958*	3-1/2"	4.62"	3.86"	4.79"	4.05"	-	4
I4959*	4"	5.02"	3.88"	5.32"	4.58"	-	4



- Heavy Steel Walls, Zinc Plated
- Insulated throat
- Male hub threads - NPSM
- Concrete tight (When Taped)



Steel EMT Compression Couplings

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I4960	1/2"	1.72"	1.06"	1.00"	0.73"	25	250
I4961	3/4"	1.73"	1.30"	1.22"	0.95"	25	250
I4962	1"	1.91"	1.59"	1.48"	1.19"	10	100
I4963	1-1/4"	2.53"	2.08"	1.93"	1.54"	-	25
I4964	1-1/2"	2.62"	2.27"	2.16"	1.77"	-	20
I4965	2"	2.78"	2.72"	2.57"	2.22"	-	10
I4966*	2-1/2"	3.94"	3.70"	3.46"	2.93"	-	8
I4967*	3"	4.17"	4.38"	4.02"	3.58"	-	4
I4968*	3-1/2"	4.70"	4.68"	4.62"	4.05"	-	4
I4969*	4"	4.96"	5.40"	5.02"	4.58"	-	6



- Heavy Steel Walls, Zinc Plated
- Concrete tight (When Taped)

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Steel EMT Rain Tight Compression Connectors



- Internal Sealing Ring & Knockout Gasket create Rain Tight Seal
- Heavy Steel Walls, Zinc Plated
- Concrete Tight

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4970	1/2"	1.14"	0.51"	1.08"	50	500
I4971	3/4"	1.42"	0.51"	1.35"	25	250
I4972	1"	1.58"	0.57"	1.65"	10	100
I4973	1-1/4"	1.60"	0.61"	2.02"	10	100
I4974	1-1/2"	1.93"	0.63"	2.24"	10	50
I4975	2"	2.23"	0.67"	2.80"	5	50
I4976*	2-1/2"	2.80"	0.83"	3.60"	-	12
I4977*	3"	3.00"	0.83"	4.25"	-	12
I4978*	3-1/2"	3.35"	0.83"	4.80"	-	6
I4979*	4"	3.47"	0.83"	5.24"	-	6

* Also UL Listed for use with Rigid & IMC

Steel EMT Rain Tight Compression Connectors-Insulated Throat



- Internal Sealing Ring & Knockout Gasket create Rain Tight Seal
- Heavy Steel Walls, Zinc Plated
- Insulated throat
- Concrete Tight

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4980	1/2"	1.18"	0.51"	1.08"	50	500
I4981	3/4"	1.46"	0.51"	1.35"	25	250
I4982	1"	1.61"	0.57"	1.65"	10	100
I4983	1-1/4"	1.69"	0.61"	2.02"	10	100
I4984	1-1/2"	2.00"	0.61"	2.24"	10	50
I4985	2"	2.36"	0.67"	2.76"	5	50
I4986*	2-1/2"	2.87"	0.83"	3.62"	-	12
I4987*	3"	3.07"	0.83"	4.25"	-	12
I4988*	3-1/2"	3.42"	0.83"	4.80"	-	6
I4989*	4"	3.54"	0.83"	5.24"	-	6

* Also UL Listed for use with Rigid & IMC

Steel EMT Compression Rain Tight Couplings



- Internal Sealing Ring creates Rain Tight Seal
- Heavy Steel Walls, Zinc Plated
- Concrete Tight

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4990	1/2"	1.81"	1.08"	50	500
I4991	3/4"	1.89"	1.35"	25	250
I4992	1"	2.30"	1.65"	10	100
I4993	1-1/4"	2.68"	2.02"	10	100
I4994	1-1/2"	2.74"	2.24"	10	50
I4995	2"	2.95"	2.76"	5	50
I4996*	2-1/2"	3.90"	3.62"	-	12
I4997*	3"	4.11"	4.25"	-	12
I4998*	3-1/2"	4.53"	4.80"	-	6
I4999*	4"	4.65"	5.24"	-	6

* Also UL Listed for use with Rigid & IMC

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM


1-888-777-6678



EMT To Box Offset Set Screw Connector

- Zinc Die-Cast
- Combo Head Set-Screw
- Assembled with Zinc Die Cast Locknut
- Concrete Tight (When Taped)


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15010	1/2"	2.11"	0.37"	20	200
15011	3/4"	2.85"	0.75"	10	100
15012	1"	3.14"	1.19"	-	100

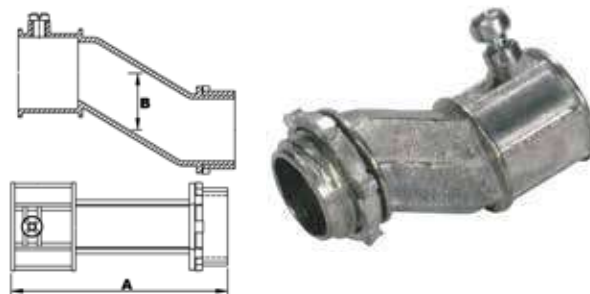

EMT To Box Offset Compression Connector

- Zinc Die-Cast
- Compression Style
- Assembled with Zinc Die Cast Locknut
- Concrete Tight (When Taped)


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15014	1/2"	2.11"	0.37"	20	200
15015	3/4"	2.88"	0.75"	10	100

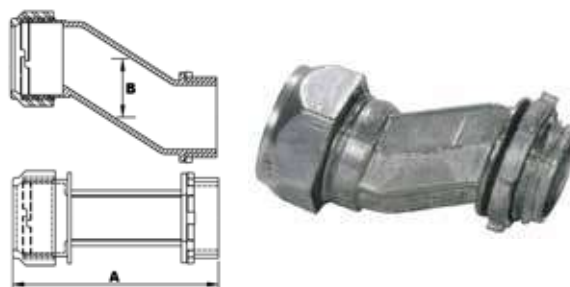

EMT to EMT Inside Corner Set Screw Pulling Elbows

- Combo Head Set Screws
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15020	1/2"	2.32"	2.32"	0.59"	10	100
15021	3/4"	2.64"	2.64"	0.78"	5	50
15022	1"	2.94"	2.94"	1.19"	-	50

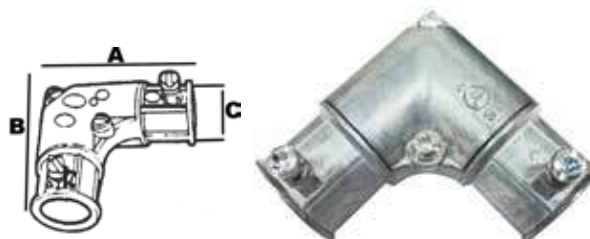

EMT Insulating Bushings

CAT. NO.	TRADE SIZE	DIMENSIONS		BAG QTY
		A	B	
21700	1/2"	0.522"	0.570"	100
21701	3/4"	0.538"	0.764"	50
21702	1"	0.614"	0.954"	25
21703	1-1/4"	0.620"	1.26"	25
21704	1-1/2"	0.620"	1.44"	25
21705	2"	0.620"	1.86"	20
21706	2-1/2"	1.12"	2.34"	-
21707	3"	1.19"	2.78"	-
21708	3-1/2"	1.22"	3.27"	-
21709	4"	1.22"	3.71"	-




- EMT Insulating Bushings protect cables from abrasion
- Fast & Easy press-on installation
- Polyethylene rated at 194°F(90°C)

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com






EMT To BOX Set Screw Pulling Elbows - Zinc Die Cast



- Removable Aluminum Cover and Neoprene Gasket
- Zinc Die Cast
- Assembled with Zinc Die Cast locknut
- Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS		OUTER BOX
		A	B	
I5030	1/2"	1.34"	0.97"	100
I5031	3/4"	1.40"	1.26"	50
I5032	1"	1.97"	1.51"	30
I5033	1-1/4"	2.32"	1.91"	20


EMT To EMT Set Screw Pulling Elbows - Zinc Die Cast



- Zinc Die Cast
- Removable Aluminum Cover and Neoprene Gasket Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS				OUTER BOX
		A	B	C	D	
I5035	1/2"	1.31"	0.96"	2.56"	1.78"	100
I5036	3/4"	1.39"	1.23"	2.81"	2.15"	50
I5037	1"	1.96"	1.51"	3.88"	3.17"	30
I5038	1-1/4"	2.32"	1.91"	4.62"	3.25"	20


EMT/RIGID To BOX Combination Pulling Elbow - Zinc Die Cast



- Threaded and Set Screw Conduit Entrance
- Removable Aluminum Cover and Neoprene Gasket Assembled with Zinc Die Cast Locknut
- Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I5040	1/2"	1.31"	0.96"	2.40"	1.78"	20	200
I5041	3/4"	1.39"	1.23"	2.66"	2.14"	15	150
I5042	1"	1.96"	1.52"	3.66"	3.24"	6	60

EMT/RIGID To EMT/RIGID Combination Pulling Elbow - Zinc



- Threaded and Set Screw Conduit Entrance
- Removable Aluminum Cover and Neoprene Gasket
- Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I5044	1/2"	1.31"	0.96"	2.63"	1.78"	20	200
I5045	3/4"	1.39"	1.23"	2.73"	2.14"	15	150



90° EMT Elbows



CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
I6001	90°	1/2"	4.00"	6.90"	2.90"	50
I6002	90°	3/4"	4.50"	7.40"	2.90"	50
I6003	90°	1"	5.80"	8.70"	3.00"	25
I6004	90°	1-1/4"	7.30"	10.60"	3.30"	20
I6005	90°	1-1/2"	8.30"	11.90"	3.60"	15
I6006*	90°	2"	9.50"	13.80"	4.30"	10
I6007*	90°	2-1/2"	10.50"	15.80"	5.30"	156
I6008*	90°	3"	13.00"	18.80"	5.80"	35
I6009*	90°	3-1/2"	15.00"	21.80"	6.80"	35
I6010*	90°	4"	16.00"	23.10"	7.10"	35

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed



- For use with conduit



45° EMT Elbows

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS				OUTER BOX
			RADIUS	OFFSET B	OFFSET C	TANGENT	
I6011	45°	1/2"	4.00"	7.00"	2.90"	1.90"	50
I6012	45°	3/4"	4.50"	7.40"	3.00"	2.00"	50
I6013	45°	1"	5.80"	9.50"	4.00"	2.70"	25
I6014	45°	1-1/4"	7.30"	13.10"	5.40"	4.30"	20
I6015	45°	1-1/2"	8.30"	14.00"	5.80"	4.30"	15
I6016*	45°	2"	9.50"	16.10"	6.60"	5.40"	10
I6017*	45°	2-1/2"	10.50"	19.00"	7.90"	6.80"	240
I6018*	45°	3"	13.00"	20.50"	8.50"	6.70"	35
I6019*	45°	3-1/2"	15.00"	22.80"	9.50"	7.10"	35
I6020*	45°	4"	16.00"	29.20"	12.10"	10.50"	35

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed



- For use with conduit



22-1/2° EMT Elbows

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	B	TANGENT	
EMT05022	22-1/2°	1/2"	4"	5-7/8"	1-5/16"	50
EMT07522	22-1/2°	3/4"	4-1/2"	7"	1-7/16"	50
EMT10022	22-1/2°	1"	5-3/4"	8-3/4"	1-9/16"	25
EMT12522	22-1/2°	1-1/4"	7-1/4"	10-1/8"	1-3/4"	20
EMT15022	22-1/2°	1-1/2"	8-1/4"	11-3/4"	2"	15
EMT20022*	22-1/2°	2"	9-1/2"	14-1/4"	2-5/16"	10
EMT25022*	22-1/2°	2-1/2"	10-1/2"	16-1/4"	2-3/4"	50
EMT30022*	22-1/2°	3"	13"	18-3/4"	3-1/4"	35
EMT35022*	22-1/2°	3-1/2"	15"	21-1/4"	3-11/16"	35
EMT40022*	22-1/2°	4"	16"	23-3/8"	3-15/16"	35

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed




- For use with conduit

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




45° PVC Elbow

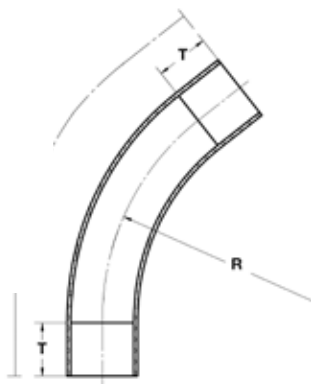

- All Elbows are Standard Radius
- Construction of Rigid PVC
- Suitable for Indoor, Outdoor, and Burial Use
- UL and CSA Listed
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS			BOX QTY
		R	T	L	
P0545S40K	1/2"	4.000"	1.500"	6.000"	50
P0745S40K	3/4"	4.500"	1.600"	6.750"	50
P1045S40K	1"	5.750"	2.000"	8.750"	50
P1245S40K	1-1/4"	7.250"	2.250"	10.125"	35
P1545S40K	1-1/2"	8.250"	2.250"	11.125"	20
P2045S40K	2"	9.500"	2.250"	11.750"	15
P2545S40K	2-1/2"	10.500"	3.000"	14.188"	20
P3045S40K	3"	13.000"	3.500"	17.250"	10
P4045S40K	4"	16.000"	3.500"	19.875"	126

90° PVC Elbow



- All Elbows are Standard Radius
- Construction of Rigid PVC
- Suitable for Indoor, Outdoor, and Burial Use
- UL and CSA Listed
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS			BOX QTY
		R	T	L	
P0590S40K	1/2"	4.000"	1.600"	9.500"	40
P0790S40K	3/4"	4.500"	2.500"	12.167"	40
P1090S40K	1"	5.750"	2.500"	14.000"	50
P1290S40K	1-1/4"	7.250"	2.500"	16.500"	25
P1590S40K	1-1/2"	8.250"	2.000"	17.000"	20
P2090S40K	2"	9.500"	3.000"	20.875"	15
P2590S40K	2-1/2"	10.500"	3.000"	27.750"	200
P3090S40K	3"	13.000"	3.100"	35.250"	110
P4090S40K	4"	16.000"	3.400"	37.000"	54

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




45° PVC Elbow with Bell End



- All Elbows are Standard Radius
- Construction of Rigid PVC
- Suitable for Indoor, Outdoor, and Burial Use
- UL and CSA Listed
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS			BOX QTY
		R	T	L	
P0545B40K	1/2"	4.000"	1.500"	6.000"	50
P0745B40K	3/4"	4.500"	1.600"	6.750"	50
PI045B40K	1"	5.750"	2.000"	8.750"	50
PI245B40K	1-1/4"	7.250"	2.250"	10.125"	35
PI545B40K	1-1/2"	8.250"	2.250"	11.125"	20
P2045B40K	2"	9.500"	2.250"	11.750"	15
P2545B40K	2-1/2"	10.500"	3.000"	14.188"	20
P3045B40K	3"	13.000"	3.500"	17.250"	10
P4045B40K	4"	16.000"	3.500"	19.875"	126

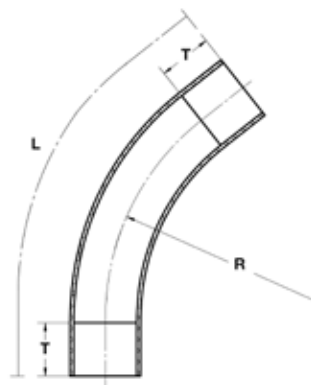


PVC Elbows



90° PVC Elbow with Bell End

- All Elbows are Standard Radius
- Construction of Rigid PVC
- Suitable for Indoor, Outdoor, and Burial Use
- UL and CSA Listed
- Conforms to UL 651



CAT. NO.	TRADE SIZE	DIMENSIONS			BOX QTY
		R	T	L	
P0590B40K	1/2"	4.000"	1.600"	9.500"	40
P0790B40K	3/4"	4.500"	2.500"	12.167"	40
PI090B40K	1"	5.750"	2.500"	14.000"	50
PI290B40K	1-1/4"	7.250"	2.500"	16.500"	25
PI590B40K	1-1/2"	8.250"	2.000"	17.000"	20
P2090B40K	2"	9.500"	3.000"	20.875"	15
P2590B40K	2-1/2"	10.500"	3.000"	27.750"	200
P3090B40K	3"	13.000"	3.100"	35.250"	110
P4090B40K	4"	16.000"	3.400"	37.000"	54

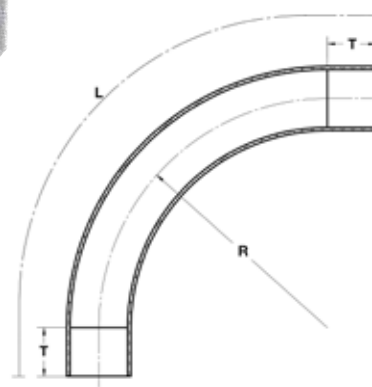

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




PVC Expansion Joint

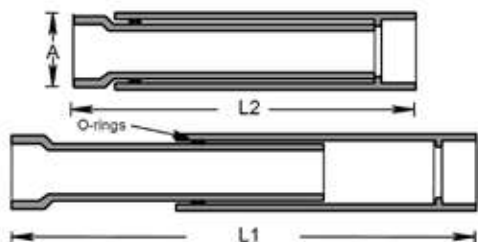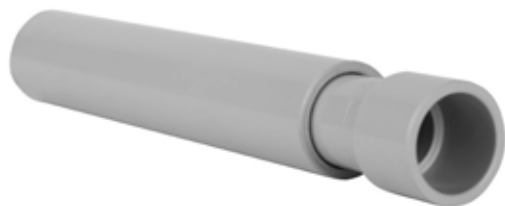

- Designed to be Installed Vertically or Horizontally
- Pre-Lubricated with Build in O-Ring
- Constructed of High Impact PVC
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS			BOX QTY
		D	L1	L2	
P050EJK	1/2"	1.080"	12.000"	8.000"	150
P075EJK	3/4"	1.300"	12.000"	8.000"	100
P100EJK	1"	1.590"	12.500"	8.50"	50
P125EJK	1-1/4"	2.000"	13.000"	9.000"	50
P150EJK	1-1/2"	2.230"	13.000"	9.000"	25
P200EJK	2"	2.720"	13.250"	9.250"	45
P250EJK	2-1/2"	3.320"	22.250"	14.250"	15
P300EJK	3"	4.000"	22.250"	14.250"	32
P400EJK	4"	5.000"	22.900"	14.900"	20


PVC End Cap



- Constructed of High Impact PVC
- Conforms to UL 651

<i>CAT. NO.</i>	<i>TRADE SIZE</i>	<i><u>DIMENSIONS</u> A</i>	<i><u>BOX QTY</u></i>
P050ECK	1/2"	1.025"	150
P075ECK	3/4"	1.630"	100
P100ECK	1"	1.860"	50
P125ECK	1-1/4"	1.750"	50
P150ECK	1-1/2"	1.750"	25
P200ECK	2"	2.445"	45
P250ECK	2-1/2"	2.915"	15
P300ECK	3"	3.050"	32
P400ECK	4"	3.260"	20

PVC Straight Coupling



- Used for Connecting Conduit and Fittings
- Center Coupling Stop
- Construction of High Impact PVC
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		D	A	
P050SCK	1/2"	1.060"	1.400"	150
P075SCK	3/4"	1.310"	1.640"	100
P100SCK	1"	1.590"	1.830"	50
P125SCK	1-1/4"	2.000"	2.070"	50
P150SCK	1-1/2"	2.230"	2.300"	25
P200SCK	2"	2.720"	2.405"	45
P250SCK	2-1/2"	3.320"	3.450"	15
P300SCK	3"	4.000"	3.600"	32
P400SCK	4"	5.020"	3.765"	20

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



- NPT Tapered Thread
- Threaded Female End
- Constructed of High Impact PVC
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		E	B	
P050FAK	1/2"	1.400"	0.700"	150
P075FAK	3/4"	1.550"	0.765"	100
P100FAK	1"	2.000"	1.000"	50
P125FAK	1-1/4"	2.065"	1.000"	30
P150FAK	1-1/2"	2.185"	1.000"	25
P200FAK	2"	2.260"	1.000"	45
P250FAK	2-1/2"	2.290"	1.000"	15
P300FAK	3"	2.950"	1.145"	25
P400FAK	4"	3.120"	1.150"	15



- Designed for Use with Lock Nut
- NPT Tapered Thread
- Threaded Male End
- Constructed of High Impact PVC
- Conforms to UL 651


CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		E	B	
P050MAK	1/2"	1.305"	0.550"	150
P075MAK	3/4"	1.435"	0.565"	125
P100MAK	1"	1.775"	0.800"	50
P125MAK	1-1/4"	1.855"	0.800"	45
P150MAK	1-1/2"	1.980"	0.800"	30
P200MAK	2"	2.070"	0.810"	50
P250MAK	2-1/2"	2.480"	0.820"	25
P300MAK	3"	2.580"	0.765"	45
P400MAK	4"	2.870"	0.870"	20




- For Schedule 40 & 80 PVC Conduit
- Heavy Duty Polyethylene resists deterioration from UV rays and breakage from extreme cold

CAT. NO.	TRADE SIZE	BOX QTY
19490	1/2"	100
19492	3/4"	100
19494	1"	100
19496	1-1/4"	50
19498	1-1/2"	50
19500	2"	50
19501	2-1/2"	25
19502	3"	25
19503	4"	25

PVC Female Adaptor



PVC Male Adaptor




2 Hole PVC Pipe Straps





PVC C Conduit Body

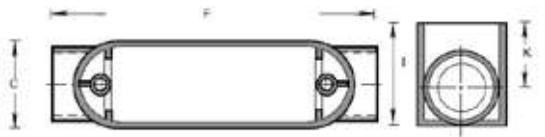


- Includes Cover & Weatherproof Gasket
- UL and CSA Listed
- Constructed of High Impact PVC
- Conforms to UL 651



CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		C	F	I	K	
C050CBPK	1/2"	1.312"	4.843"	1.500"	0.833"	25
C075CBPK	3/4"	1.500"	5.640"	1.625"	0.920"	15
C100CBPK	1"	1.750"	6.743"	2.010"	1.188"	10
C125CBPK	1-1/4"	2.450"	8.409"	2.510"	1.359"	10
C150CBPK	1-1/2"	2.468"	8.839"	2.520"	1.360"	10
C200CBPK	2"	3.190"	10.880"	4.535"	1.970"	10
C250CBPK	2-1/2"	4.500"	14.600"	6.240"	2.610"	4
C300CBPK	3"	4.500"	14.600"	6.240"	2.610"	4
C400CBPK	4"	5.540"	17.070"	7.500"	2.975"	5

PVC LB Conduit Body

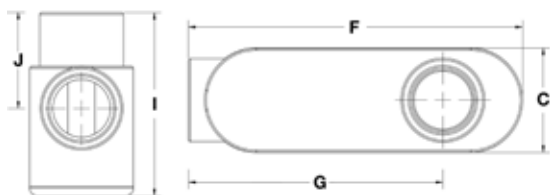


- Includes Cover & Weatherproof Gasket
- Constructed of High Impact PVC
- UL and CSA Listed
- Conforms to UL 651



CAT. NO.	TRADE SIZE	DIMENSIONS					BOX QTY
		C	F	G	I	J	
LB050CBPK	1/2"	1.312"	4.285"	3.290"	2.058"	1.175"	25
LB075CBPK	3/4"	1.500"	4.970"	3.980"	2.295"	1.375"	15
LB100CBPK	1"	1.750"	5.900"	4.656"	2.853"	1.665"	10
LB125CBPK	1-1/4"	2.450"	7.650"	6.060"	3.269"	1.910"	10
LB150CBPK	1-1/2"	2.468"	7.812"	6.180"	3.547"	2.187"	10
LB200CBPK	2"	3.062"	9.970"	8.055"	4.516"	2.500"	10
LB250CBPK	2-1/2"	4.500"	13.630"	9.825"	6.240"	4.150"	4
LB300CBPK	3"	4.500"	13.630"	10.900"	6.240"	3.630"	4
LB400CBPK	4"	5.540"	16.000"	11.465"	7.500"	4.525"	4

PVC LL Conduit Body

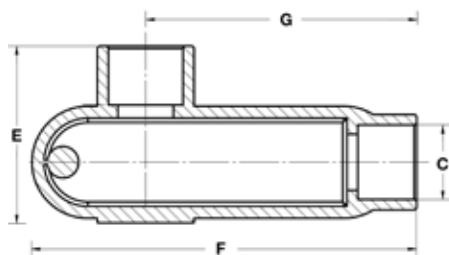

- Includes Cover & Weatherproof Gasket
- Constructed of High Impact PVC
- UL and CSA Listed
- Conforms to UL 651



CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		C	E	F	G	
LL050CBPK	1/2"	1.312"	1.898"	4.285"	3.290"	25
LL075CBPK	3/4"	1.500"	2.204"	4.970"	3.980"	15
LL100CBPK	1"	1.750"	2.635"	5.900"	4.656"	10
LL125CBPK	1-1/4"	2.450"	3.246"	7.650"	6.060"	10
LL150CBPK	1-1/2"	2.468"	3.546"	7.812"	6.180"	10
LL200CBPK	2"	3.062"	4.176"	9.970"	8.055"	10
LL250CBPK	2-1/2"	4.625"	5.886"	13.750"	11.843"	4
LL300CBPK	3"	4.625"	5.918"	14.250"	11.843"	4
LL400CBPK	4"	5.445"	7.178"	15.500"	12.750"	5




PVC LR Conduit Body



- Includes Cover & Weatherproof Gasket
- Constructed of High Impact PVC
- UL and CSA Listed
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		C	E	F	G	
LR050CBPK	1/2"	1.312"	1.898"	4.285"	3.290"	25
LR075CBPK	3/4"	1.500"	2.204"	4.970"	3.980"	15
LR100CBPK	1"	1.750"	2.635"	5.900"	4.656"	10
LR125CBPK	1-1/4"	2.450"	3.246"	7.650"	6.060"	10
LR150CBPK	1-1/2"	2.468"	3.546"	7.812"	6.180"	10
LR200CBPK	2"	3.062"	4.176"	9.970"	8.055"	10
LR250CBPK	2-1/2"	4.625"	5.886"	13.750"	11.843"	4
LR300CBPK	3"	4.615"	5.918"	14.250"	11.843"	4
LR400CBPK	4"	5.445"	7.178"	15.500"	12.750"	5

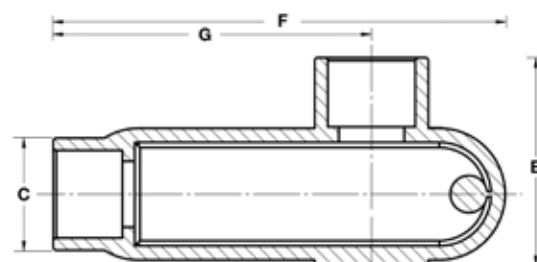


PVC Conduit Bodies



PVC T Conduit Body

- Includes Cover & Weatherproof Gasket
- Constructed of High Impact PVC
- UL and CSA Listed
- Conforms to UL 651

CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		C	E	F	K	
T050CBPK	1/2"	1.312"	1.898"	4.873"	0.833"	25
T075CBPK	3/4"	1.500"	2.204"	5.640"	0.920"	15
T100CBPK	1"	1.750"	2.635"	6.743"	1.188"	10
T125CBPK	1-1/4"	2.450"	3.246"	8.409"	1.359"	10
T150CBPK	1-1/2"	2.468"	3.546"	8.839"	1.360"	10
T200CBPK	2"	3.190"	4.535"	10.880"	1.970"	10
T250CBPK	2-1/2"	4.500"	6.240"	14.600"	2.610"	4
T300CBPK	3"	4.500"	6.240"	14.600"	2.610"	4
T400CBPK	4"	5.540"	7.500"	17.070"	2.975"	5

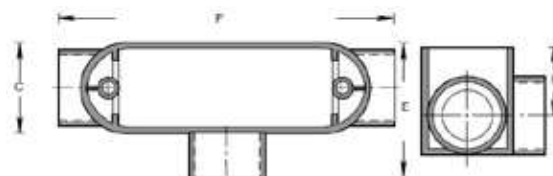


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Aluminum Rigid Conduit Bodies T Type -Threaded



To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

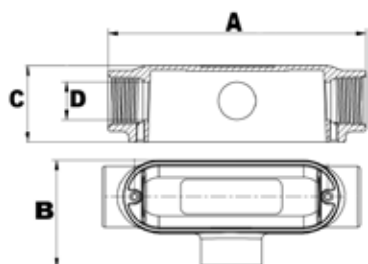


- Tapered Threaded Hubs (NPT)
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS -T SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4060	1/2"	4.72"	2.03"	1.36"	0.61"	50
I4061	3/4"	5.51"	2.30"	1.63"	0.81"	50
I4062	1"	6.46"	2.68"	1.89"	1.04"	25
I4063	1-1/4"	8.35"	3.52"	2.50"	1.37"	10
I4064	1-1/2"	8.35"	3.52"	2.50"	1.60"	10
I4065	2"	10.55"	4.27"	3.41"	2.06"	10
I4066	2-1/2"	13.46"	5.89"	3.98"	2.46"	1
I4067	3"	13.46"	5.89"	4.53"	3.06"	1
I4068	3-1/2"	16.30"	7.66"	5.60"	3.54"	1
I4069	4"	16.30"	7.66"	5.60"	4.02"	1
WITH COVER AND GASKET						
I4070	1/2"	4.72"	2.03"	1.36"	0.61"	50
I4071	3/4"	5.51"	2.30"	1.63"	0.81"	50
I4072	1"	6.46"	2.68"	1.89"	1.04"	10
I4073	1-1/4"	8.35"	3.52"	2.50"	1.37"	10
I4074	1-1/2"	8.35"	3.52"	2.50"	1.60"	10
I4075	2"	10.55"	4.27"	3.41"	2.06"	10
I4076	2-1/2"	13.46"	5.89"	3.98"	2.46"	1
I4077	3"	13.46"	5.89"	4.53"	3.06"	1
I4078	3-1/2"	16.30"	7.66"	5.60"	3.54"	1
I4079	4"	16.30"	7.66"	5.60"	4.02"	1

Aluminum Rigid Conduit Bodies LB Type -Threaded



To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit



- Tapered Threaded Hubs (NPT)
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4040	1/2"	4.31"	1.34"	2.09"	0.61"	50
I4041	3/4"	5.08"	1.56"	2.39"	0.81"	50
I4042	1"	5.92"	1.82"	2.78"	1.04"	25
I4043	1-1/4"	7.82"	2.51"	3.52"	1.37"	10
I4044	1-1/2"	7.82"	2.51"	3.52"	1.60"	10
I4045	2"	10.05"	3.19"	4.51"	2.06"	10
I4046	2-1/2"	12.83"	4.49"	5.31"	2.46"	1
I4047	3"	12.83"	4.49"	5.91"	3.06"	1
I4048	3-1/2"	15.65"	5.55"	7.09"	3.54"	1
I4049	4"	15.65"	5.55"	7.09"	4.02"	1
WITH COVER AND GASKET						
I4050	1/2"	4.31"	1.34"	2.09"	0.61"	50
I4051	3/4"	5.08"	1.56"	2.39"	0.81"	50
I4052	1"	5.92"	1.82"	2.78"	1.04"	25
I4053	1-1/4"	7.82"	2.51"	3.52"	1.37"	10
I4054	1-1/2"	7.82"	2.51"	3.52"	1.60"	10
I4055	2"	10.05"	3.19"	4.51"	2.06"	10
I4056	2-1/2"	12.83"	4.49"	5.31"	2.46"	1
I4057	3"	12.83"	4.49"	5.91"	3.06"	1
I4058	3-1/2"	15.65"	5.55"	7.09"	3.54"	1
I4059	4"	15.65"	5.55"	7.09"	4.02"	1


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Aluminum Rigid Conduit Bodies LR Type - Threaded

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4080	1/2"	4.31"	2.03"	1.36"	0.61"	50
I4081	3/4"	5.08"	2.30"	1.63"	0.81"	50
I4082	1"	5.92"	2.68"	1.89"	1.04"	25
I4083	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
I4084	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
I4085	2"	10.05"	4.27"	3.41"	2.06"	10
I4086	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
I4087	3"	12.83"	5.89"	4.53"	3.06"	1
I4088	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
I4089	4"	15.65"	7.66"	5.59"	4.02"	1
WITH COVER AND GASKET						
I4090	1/2"	4.31"	2.03"	1.36"	0.61"	50
I4091	3/4"	5.08"	2.30"	1.63"	0.81"	50
I4092	1"	5.92"	2.68"	1.89"	1.04"	25
I4093	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
I4094	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
I4095	2"	10.05"	4.27"	3.41"	2.06"	10
I4096	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
I4097	3"	12.83"	5.89"	4.53"	3.06"	1
I4098	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
I4099	4"	15.65"	7.66"	5.59"	4.02"	1

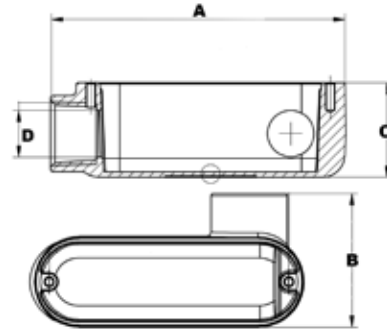


- Tapered Threaded Hubs (NPT)
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls



Aluminum Rigid Conduit Bodies LL Type - Threaded

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit


CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4100	1/2"	4.31"	2.03"	1.36"	0.61"	50
I4101	3/4"	5.08"	2.30"	1.63"	0.81"	50
I4102	1"	5.92"	2.68"	1.89"	1.04"	25
I4103	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
I4104	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
I4105	2"	10.05"	4.27"	3.41"	2.06"	10
I4106	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
I4107	3"	12.83"	5.89"	4.53"	3.06"	1
I4108	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
I4109	4"	15.65"	7.66"	5.59"	4.02"	1
WITH COVER AND GASKET						
I4110	1/2"	4.31"	2.03"	1.36"	0.61"	50
I4111	3/4"	5.08"	2.30"	1.63"	0.81"	50
I4112	1"	5.92"	2.68"	1.89"	1.04"	25
I4113	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
I4114	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
I4115	2"	10.05"	4.27"	3.41"	2.06"	10
I4116	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
I4117	3"	12.83"	5.89"	4.53"	3.06"	1
I4118	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
I4119	4"	15.65"	7.66"	5.59"	4.02"	1

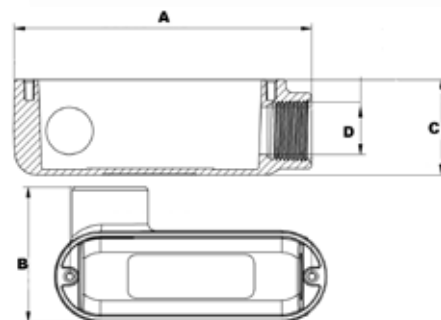

- Tapered Threaded Hubs (NPT)
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls



Aluminum Rigid Conduit Bodies C Type-Threaded

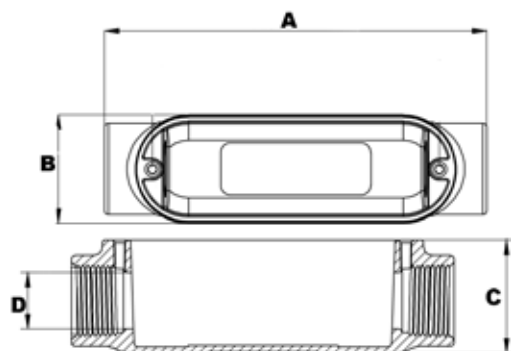


- Tapered Threaded Hubs (NPT)
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4I20	1/2"	4.72"	1.34"	1.36"	0.61"	50
I4I21	3/4"	5.51"	1.56"	1.63"	0.81"	50
I4I22	1"	6.46"	1.82"	1.89"	1.04"	25
I4I23	1-1/4"	8.35"	2.51"	2.50"	1.37"	10
I4I24	1-1/2"	8.35"	2.51"	2.50"	1.60"	10
I4I25	2"	10.55"	3.19"	3.41"	2.06"	10
I4I26	2-1/2"	13.46"	4.49"	3.98"	2.46"	1
I4I27	3"	13.46"	4.49"	4.53"	3.06"	1
I4I28	3-1/2"	16.30"	5.55"	5.59"	3.54"	1
I4I29	4"	16.30"	5.55"	5.59"	4.02"	1
WITH COVER AND GASKET						
I4I30	1/2"	4.72"	1.34"	1.36"	0.61"	50
I4I31	3/4"	5.51"	1.56"	1.63"	0.81"	50
I4I32	1"	6.46"	1.82"	1.89"	1.04"	10
I4I33	1-1/4"	8.35"	2.51"	2.50"	1.37"	10
I4I34	1-1/2"	8.35"	2.51"	2.50"	1.60"	10
I4I35	2"	10.55"	3.19"	3.41"	2.06"	10
I4I36	2-1/2"	13.46"	4.49"	3.98"	2.46"	1
I4I37	3"	13.46"	4.49"	4.53"	3.06"	1
I4I38	3-1/2"	16.30"	5.55"	5.59"	3.54"	1
I4I39	4"	16.30"	5.55"	5.59"	4.02"	1

Aluminum Mogul Conduit Bodies with Cover & Gasket

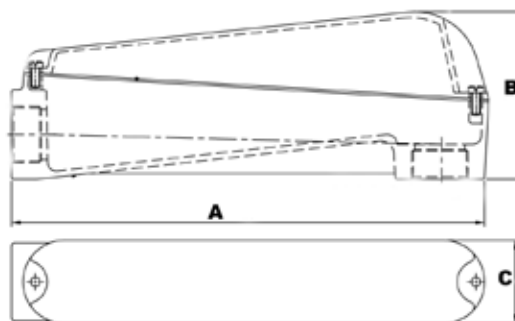

- Larger body size facilitates pulling of large and heavy conductors
- Specially designed raised cast covers provide additional wiring area
- Smooth, rounded integral bushing in each hub protects conductor insulation
- Includes cellulose/rubber Flex Sealing Gasket

WITH COVER & GASKET

CAT. NO.	TRADE SIZE	DIMENSIONS			WIRE SIZE	BOX QTY
		A	B	C		
I4300	1-1/4"	9.65"	3.54"	2.50"	3 #1/0 AWG	2
I4301	1-1/2"	14.53"	5.41"	3.13"	3 #3/0 AWG	1
I4302	2"	14.53"	5.41"	3.13"	3 #300 MCM	1
I4303	2-1/2"	22.01"	7.54"	4.53"	3 #400 MCM	1
I4304	3"	22.01"	7.54"	4.53"	3 #700 MCM	1
I4306	4"	28.84"	8.94"	5.51"	3 #1000 MCM	1




Aluminum EMT Set Screw Conduit Bodies T Type

- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-T SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4I60	1/2"	4.75"	2.03"	1.36"	0.72"	50
I4I61	3/4"	5.51"	2.30"	1.63"	0.96"	50
I4I62	1"	6.46"	2.68"	1.89"	1.18"	25
I4I63	1-1/4"	8.35"	3.52"	2.50"	1.53"	10
I4I64	1-1/2"	8.36"	3.52"	2.50"	1.76"	10
I4I65	2"	10.55"	4.27"	3.41"	2.21"	10
WITH COVER AND GASKET						
I4I70	1/2"	4.75"	2.03"	1.36"	0.72"	50
I4I71	3/4"	5.51"	2.30"	1.63"	0.96"	50
I4I72	1"	6.46"	2.68"	1.89"	1.18"	25
I4I73	1-1/4"	8.35"	3.52"	2.50"	1.53"	10
I4I74	1-1/2"	8.36"	3.52"	2.50"	1.76"	10
I4I75	2"	10.55"	4.27"	3.41"	2.21"	10

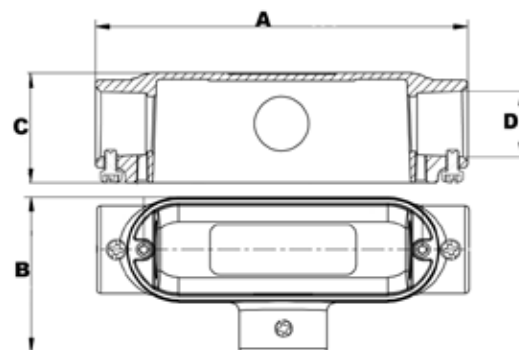


Aluminum EMT Set Screw Conduit Bodies LB Type

- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls


To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
I4I40	1/2"	4.31"	1.34"	2.09"	0.72"	50
I4I41	3/4"	5.08"	1.56"	2.39"	0.96"	50
I4I42	1"	5.92"	1.82"	2.78"	1.18"	25
I4I43	1-1/4"	7.82"	2.51"	3.52"	1.53"	10
I4I44	1-1/2"	7.82"	2.51"	3.52"	1.76"	10
I4I45	2"	10.05"	3.19"	4.51"	2.21"	10
WITH COVER AND GASKET						
I4I50	1/2"	4.31"	1.34"	2.09"	0.72"	50
I4I51	3/4"	5.08"	1.56"	2.39"	0.96"	50
I4I52	1"	5.92"	1.82"	2.78"	1.18"	25
I4I53	1-1/4"	7.82"	2.51"	3.52"	1.53"	10
I4I54	1-1/2"	7.82"	2.51"	3.52"	1.76"	10
I4I55	2"	10.05"	3.19"	4.51"	2.21"	10

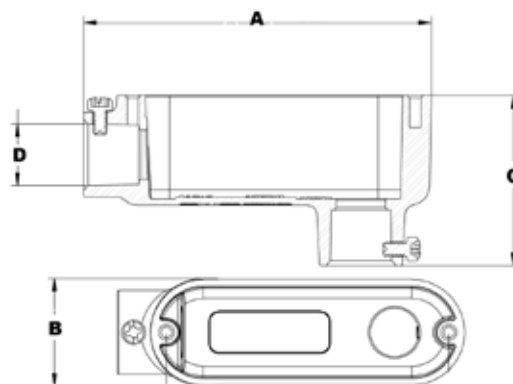



Aluminum EMT Set Screw Conduit Bodies LR Type

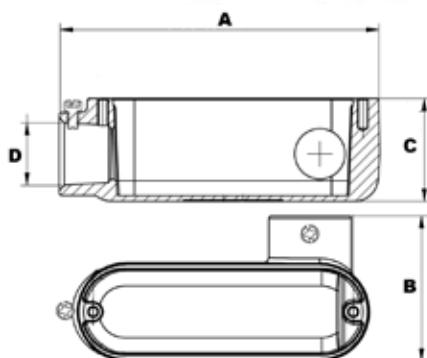


- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
14180	1/2"	4.31"	2.03"	1.36"	0.72"	50
14181	3/4"	5.08"	2.30"	1.63"	0.96"	50
14182	1"	5.92"	2.68"	1.89"	1.18"	25
14183	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
14184	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
14185	2"	10.05"	4.27"	3.41"	2.21"	10
WITH COVER AND GASKET						
14190	1/2"	4.31"	2.03"	1.36"	0.72"	50
14191	3/4"	5.08"	2.30"	1.63"	0.96"	50
14192	1"	5.92"	2.68"	1.89"	1.18"	25
14193	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
14194	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
14195	2"	10.05"	4.27"	3.41"	2.21"	10

Aluminum EMT Set Screw Conduit Bodies LL Type

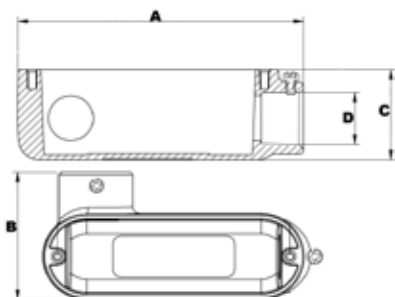

- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls


To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
14200	1/2"	4.31"	2.03"	1.36"	0.72"	50
14201	3/4"	5.08"	2.30"	1.63"	0.96"	50
14202	1"	5.92"	2.68"	1.89"	1.18"	25
14203	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
14204	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
14205	2"	10.05"	4.27"	3.41"	2.21"	10
WITH COVER AND GASKET						
14210	1/2"	4.31"	2.03"	1.36"	0.72"	50
14211	3/4"	5.08"	2.30"	1.63"	0.96"	50
14212	1"	5.92"	2.68"	1.89"	1.18"	25
14213	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
14214	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
14215	2"	10.05"	4.27"	3.41"	2.21"	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

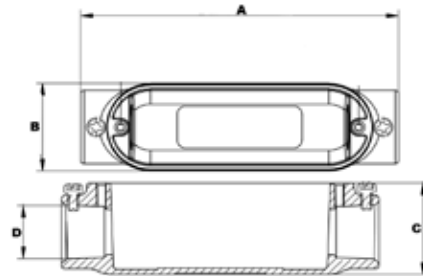

CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES				BOX QTY
		A	B	C	D	
CONDUIT BODY ONLY						
14220	1/2"	4.72"	1.34"	1.36"	0.72"	50
14221	3/4"	5.51"	1.56"	1.63"	0.96"	50
14222	1"	6.46"	1.82"	1.89"	1.18"	25
14223	1-1/4"	8.35"	2.51"	2.50"	1.52"	10
14224	1-1/2"	8.35"	2.51"	2.50"	1.76"	10
14225	2"	10.55"	3.19"	3.41"	2.21"	10
WITH COVER AND GASKET						
14230	1/2"	4.72"	1.34"	1.36"	0.72"	50
14231	3/4"	5.51"	1.56"	1.63"	0.96"	50
14232	1"	6.46"	1.82"	1.89"	1.18"	25
14233	1-1/4"	8.35"	2.51"	2.50"	1.52"	10
14234	1-1/2"	8.35"	2.51"	2.50"	1.76"	10
14235	2"	10.55"	3.19"	3.41"	2.21"	10


Trade Size in Inches		Wire Size (THWN, THHN) Conductor Size AWG/kcmil																	
		14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500
1/2	EMT	12	9	5	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1
	IMC	14	10	6	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1
	GALV	13	9	6	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1
3/4	EMT	22	16	10	6	4	2	1	1	1	1	1	1	1	1	1	1	1	1
	IMC	24	17	11	6	4	3	2	1	1	1	1	1	1	1	1	1	1	1
	GALV	22	16	10	6	4	2	1	1	1	1	1	1	1	1	1	1	1	1
1	EMT	35	26	16	9	7	4	3	3	1	1	1	1	1	1	1	1	1	1
	IMC	39	29	18	10	7	4	4	3	2	1	1	1	1	1	1	1	1	1
	GALV	36	26	17	9	7	4	3	3	1	1	1	1	1	1	1	1	1	1
1 1/4	EMT	61	45	28	16	12	7	6	5	4	3	2	1	1	1	1	1	1	1
	IMC	68	49	31	18	13	8	6	5	4	3	2	1	1	1	1	1	1	1
	GALV	63	46	29	16	12	7	6	5	4	3	2	1	1	1	1	1	1	1
1 1/2	EMT	84	61	38	22	16	10	8	7	5	4	3	2	1	1	1	1	1	1
	IMC	91	67	42	24	17	10	9	7	5	4	3	2	1	1	1	1	1	1
	GALV	85	62	39	22	16	10	8	7	5	4	3	3	2	1	1	1	1	1
Trade Size in Inches		Wire Size (THWN, THHN) Conductor Size AWG/kcmil																	
		14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500
2	EMT	138	101	63	36	26	16	13	11	8	7	6	5	4	3	2	1	1	1
	IMC	149	109	68	39	38	17	15	12	9	8	6	5	4	3	3	2	2	1
	GALV	140	102	64	37	27	16	14	11	8	7	6	5	4	3	3	2	2	1
2 1/2	EMT	241	176	111	64	46	28	24	20	15	12	10	8	7	6	5	4	4	3
	IMC	211	154	97	56	40	25	21	17	13	11	9	7	6	5	4	4	3	2
	GALV	200	146	92	53	38	23	20	17	12	10	8	7	6	5	4	3	3	2
3	EMT	364	226	167	96	69	43	36	30	22	19	16	13	11	9	7	6	6	5
	IMC	362	238	150	86	62	38	32	27	20	17	14	12	9	8	7	6	5	4
	GALV	309	225	142	82	59	36	31	26	19	16	13	11	9	7	6	5	5	4
3 1/2	EMT	476	347	219	126	91	56	47	40	29	25	20	17	14	11	10	9	8	7
	IMC	436	318	200	115	83	51	43	36	27	23	19	16	13	10	9	8	7	6
	GALV	412	301	189	109	79	48	41	34	25	21	18	15	12	10	8	7	7	6
4	EMT	608	443	279	161	116	71	60	51	37	32	26	22	18	15	13	11	10	8
	IMC	562	410	258	149	107	66	56	47	35	29	24	20	17	13	12	10	9	7
	GALV	531	387	244	140	101	62	53	44	33	27	23	19	16	13	11	10	8	7

Above information referenced from tables C1, C4, and C8 in the National Electric Code of 2008.
For more information on the following types of conduit, please see the table listed below in the appendix C of the National Electric Code of 2008.
Rigid PVC Conduit, Schedule 80 -- Table C9
Rigid PVC Conduit, Schedule 40 -- Table C10
Flexible Metallic Conduit -- Table C3
Liquidtight Flexible Metallic Conduit -- Table C7
Liquidtight Flexible Nonmetallic Conduit (Type FOMC-B) -- Table C5
If you have any other questions see the NEC Code Book

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Aluminum Combination Conduit Bodies T Type

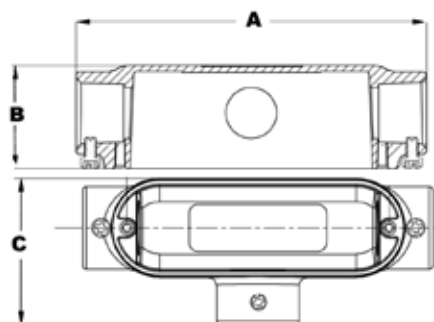


- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-T SERIES			BOX QTY
		A	B	C	
CONDUIT BODY ONLY					
I4252	1/2"	4.72"	1.36"	2.03"	50
I4253	3/4"	5.51"	1.63"	2.30"	50
I4254	1"	6.46"	1.89"	2.68"	25
I4255	1-1/4"	8.35"	2.50"	3.52"	10
I4256	1-1/2"	8.35"	2.50"	3.52"	10
I4257	2"	10.55"	3.41"	4.27"	10
WITH COVER AND GASKET					
I4258	1/2"	4.72"	1.36"	2.03"	50
I4259	3/4"	5.51"	1.63"	2.30"	50
I4260	1"	6.46"	1.89"	2.68"	25
I4261	1-1/4"	8.35"	2.50"	3.52"	10
I4262	1-1/2"	8.35"	2.50"	3.52"	10
I4263	2"	10.55"	3.41"	4.27"	10

Aluminum Combination Conduit Bodies LB Type

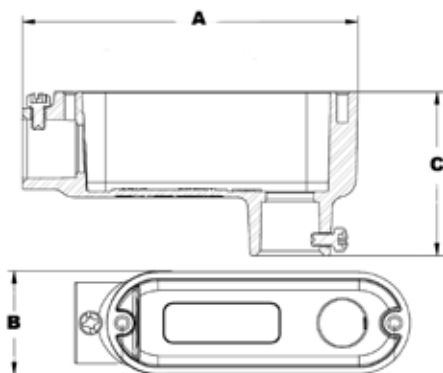

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES			BOX QTY
		A	B	C	
CONDUIT BODY ONLY					
I4240	1/2"	4.31"	1.34"	2.09"	50
I4241	3/4"	5.08"	1.56"	2.39"	50
I4242	1"	5.92"	1.82"	2.78"	25
I4243	1-1/4"	7.82"	2.51"	3.52"	10
I4244	1-1/2"	7.82"	2.51"	3.52"	10
I4245	2"	10.05"	3.19"	4.51"	10
WITH COVER AND GASKET					
I4246	1/2"	4.31"	1.34"	2.09"	50
I4247	3/4"	5.08"	1.56"	2.39"	50
I4248	1"	5.92"	1.82"	2.78"	25
I4249	1-1/4"	7.82"	2.51"	3.52"	10
I4250	1-1/2"	7.82"	2.51"	3.52"	10
I4251	2"	10.05"	3.19"	4.51"	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Aluminum Combination Conduit Bodies LR Type



- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES			BOX QTY
		A	B	C	
CONDUIT BODY ONLY					
I4264	1/2"	4.31"	2.03"	1.36"	50
I4265	3/4"	5.08"	2.30"	1.63"	50
I4266	1"	5.92"	2.68"	1.89"	25
I4267	1-1/4"	7.82"	3.52"	2.50"	10
I4268	1-1/2"	7.82"	3.52"	2.50"	10
I4269	2"	10.05"	4.27"	3.41"	10
WITH COVER AND GASKET					
I4270	1/2"	4.31"	2.03"	1.36"	50
I4271	3/4"	5.08"	2.30"	1.63"	50
I4272	1"	5.92"	2.68"	1.89"	25
I4273	1-1/4"	7.82"	3.52"	2.50"	10
I4274	1-1/2"	7.82"	3.52"	2.50"	10
I4275	2"	10.05"	4.27"	3.41"	10

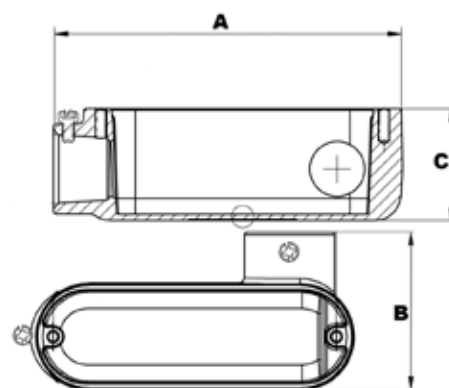


Aluminum Combination Conduit Bodies LL Type

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES			BOX QTY
		A	B	C	
CONDUIT BODY ONLY					
I4276	1/2"	4.31"	2.03"	1.36"	50
I4277	3/4"	5.08"	2.30"	1.63"	50
I4278	1"	5.92"	2.68"	1.89"	25
I4279	1-1/4"	7.82"	3.52"	2.50"	10
I4280	1-1/2"	7.82"	3.52"	2.50"	10
I4281	2"	10.05"	4.27"	3.41"	10
WITH COVER AND GASKET					
I4282	1/2"	4.31"	2.03"	1.36"	50
I4283	3/4"	5.08"	2.30"	1.63"	50
I4284	1"	5.92"	2.68"	1.89"	25
I4285	1-1/4"	7.82"	3.52"	2.50"	10
I4286	1-1/2"	7.82"	3.52"	2.50"	10
I4287	2"	10.05"	4.27"	3.41"	10

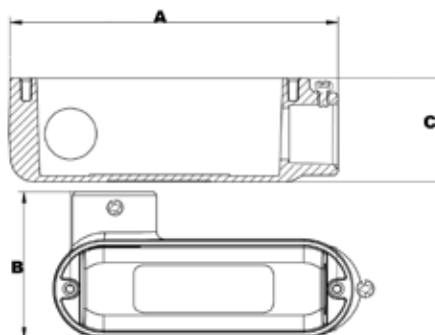




Aluminum Combination Conduit Bodies C Type



- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain Tight when used with Gasketed Covers
- Die-Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

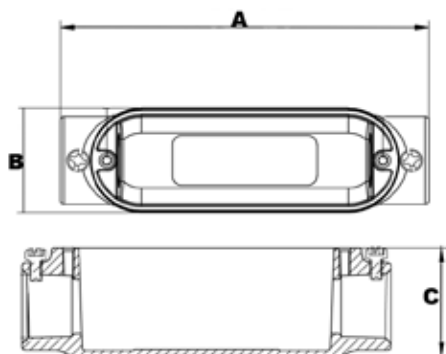


CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES			BOX QTY
		A	B	C	
CONDUIT BODY ONLY					
I4288	1/2"	4.72"	1.34"	1.36"	50
I4289	3/4"	5.51"	1.56"	1.63"	50
I4290	1"	6.46"	1.82"	1.89"	25
I4291	1-1/4"	8.35"	2.51"	2.50"	10
I4292	1-1/2"	8.35"	2.51"	2.50"	10
I4293	2"	10.55"	3.19"	3.41"	10
WITH COVER AND GASKET					
I4294	1/2"	4.72"	1.34"	1.36"	50
I4295	3/4"	5.51"	1.56"	1.63"	50
I4296	1"	6.46"	1.82"	1.89"	25
I4297	1-1/4"	8.35"	2.51"	2.50"	10
I4298	1-1/2"	8.35"	2.51"	2.50"	10
I4299	2"	10.55"	3.19"	3.41"	10

Aluminum Service Entrance Condulets



- Tapered Threaded Hubs (NPT)
- Rain Tight with Gasketed covers
- Die Cast from High-Strength, Aluminum Alloy
- Flat Back Design for easy mounting close to walls

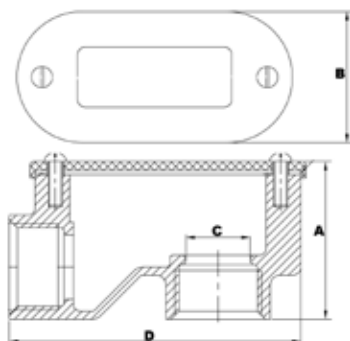

CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		A	B	C	D	
WITH GASKETED COVER						
I4307	1/2"	1.59"	1.38"	0.59"	3.15"	300
I4308	3/4"	1.89"	1.71"	0.78"	3.58"	50
I4310	1-1/4"	2.05"	1.93"	1.00"	4.17"	50

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



- Assembled with captive zinc plated steel screws
- Raised Center to Accommodate Cable Bend Radius

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4002	1/2"	3.90"	1.34"	25	250
I4003	3/4"	4.67"	1.54"	25	200
I4004	1"	5.37"	1.79"	10	100
I4005	1-1/4" - 1-1/2"	7.28"	2.50"	-	50
I4006	2"	9.49"	3.15"	-	50
I4007	2-1/2" - 3"	12.21"	4.53"	-	20
I4008	3-1/2" - 4"	14.96"	5.51"	-	10




- Stamped from high-strength aluminum alloy
- Raised Center to Accommodate Cable Bend Radius

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4010	1/2"	3.88"	1.34"	10	250
I4011	3/4"	4.67"	1.56"	10	250
I4012	1"	5.39"	1.77"	10	100
I4013	1-1/4" - 1-1/2"	7.28"	2.50"	10	50
I4014	2"	9.47"	3.13"	10	50
I4015	2-1/2" - 3"	12.21"	4.53"	-	25
I4016	3-1/2" - 4"	14.96"	5.51"	-	20


- Neoprene Rubber Material

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4030	1/2"	3.90"	1.34"	100	1,000
I4031	3/4"	4.67"	1.54"	100	1,000
I4032	1"	5.37"	1.73"	50	500
I4033	1-1/4" - 1-1/2"	7.28"	2.50"	50	500
I4034	2"	9.49"	3.15"	30	300
I4035	2-1/2" - 3"	12.21"	4.53"	10	100
I4036	3-1/2" - 4"	14.96"	5.51"	10	100


Steel Conduit Body Covers



Aluminum Conduit Body Covers



Neoprene Rubber Conduit Body Gasket



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



DiversiTite Flexible Conduit



- Type B Non-metallic liquid tight conduit
- 176°F (80°C) Rated
- Non-conductive and non-corrosive
- Resistant to oil, acid, ozone, and alkaline
- Crush, abrasion, and strain resistant
- Smooth interior ideal for pulling cable
- Easy to cut into lengths, no jagged edges
- Maintains internal I.D. even in tight radius bends
- UL Listed for outdoor use
- UV resistant

CAT. NO.	DESCRIPTION	CASE QTY
750-12100	1/2" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-12100BOX	1/2" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL IN BOX	1
750-121000*	1/2" X 1000' LIQUID TITE CONDUIT - NON-METALLIC, 1000' PER ROLL	1
750-34100	3/4" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-34800*	3/4" X 800' LIQUID TITE CONDUIT - NON-METALLIC, 800' PER ROLL	1
750-10100	1" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-10500*	1" X 500' LIQUID TITE CONDUIT - NON-METALLIC, 500' PER ROLL	1
750-125100	1-1/4" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-1550	1-1/2" X 50' LIQUID TITE CONDUIT - NON-METALLIC, 50' PER ROLL	1
750-2050*	2" X 50' LIQUID TITE CONDUIT - NON-METALLIC, 50' PER ROLL	1

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed

DiversiWhips



- Liquid tight flexible conduit system
- A labor saving convenience kit for A/C unit hookup
- Three distinct wire colors for ease of hookup
- One (1) straight and one (1) 90° metallic or non-metallic connector
- 90° connector is removable for straight connections.
- (Second straight connector not included)
- Bagged for Pegboard Display Hanging

CAT. NO.	DESCRIPTION	CASE QTY
6-12-4	1/2" X 4' #10 THHN WIRE METALLIC CONNECTORS	1
6-12-6	1/2" X 6' #10 THHN WIRE METALLIC CONNECTORS	1
6-34-4	3/4" X 4' #8 THHN WIRE METALLIC CONNECTORS	1
6-34-6	3/4" X 6' #8 THHN WIRE METALLIC CONNECTORS	1
6-12-4NM	1/2" X 4' #10 THHN WIRE NON-METALLIC CONNECTORS	1
6-12-6NM	1/2" X 6' #10 THHN WIRE NON-METALLIC CONNECTORS	1
6-34-4NM	3/4" X 4' #8 THHN WIRE NON-METALLIC CONNECTORS	1
6-34-6NM	3/4" X 6' #8 THHN WIRE NON-METALLIC CONNECTORS	1

DiversiWhips Pallet Packs



- (1) straight and (1) 90° non-metallic connector

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
B6-12-4NM*	1/2" X 4' #10 THHN WIRE NON-METALLIC CONNECTORS	90	90
B6-12-6NM*	1/2" X 6' #10 THHN WIRE NON-METALLIC CONNECTORS	60	60
B6-34-6NM*	3/4" X 6' #8 THHN WIRE NON-METALLIC CONNECTORS	45	45

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed



Liquid Tight Connectors - Straight - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15240	3/8"	1.46"	1.20"	0.48"	25	250
15241	1/2"	1.46"	1.20"	0.56"	25	250
15242	3/4"	1.46"	1.46"	0.71"	15	150
15243	1"	1.87"	1.69"	0.94"	8	80
15244	1-1/4"	2.06"	2.17"	1.24"	5	50
15245	1-1/2"	2.07"	2.44"	1.45"	4	40
15246	2"	2.01"	2.87"	1.86"	2	20
15247	2-1/2"	3.33"	3.39"	2.22"	-	12
15248	3"	3.50"	4.09"	2.76"	-	12
15249	3-1/2"	4.05"	4.90"	3.05"	-	6
15250	4"	4.09"	5.04"	3.62"	-	6



- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



Liquid Tight Connectors - Straight - Insulated - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15251	3/8"	1.52"	1.20"	0.48"	25	250
15252	1/2"	1.52"	1.20"	0.56"	25	250
15253	3/4"	1.52"	1.46"	0.71"	15	150
15254	1"	1.93"	1.69"	0.94"	8	80
15255	1-1/4"	2.08"	2.17"	1.24"	5	50
15256	1-1/2"	2.15"	2.44"	1.45"	4	40
15257	2"	2.08"	2.87"	1.86"	2	20
15258	2-1/2"	3.41"	3.39"	2.22"	-	10
15259	3"	3.58"	4.09"	2.76"	-	10
15260	3-1/2"	4.07"	4.86"	3.33"	-	6
15261	4"	4.17"	5.04"	3.62"	-	6



- Connector can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



90° Liquid Tight Connectors - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15280	3/8"	0.48"	1.26"	2.04"	15	150
15281	1/2"	0.56"	1.26"	2.10"	15	150
15282	3/4"	0.71"	1.52"	2.36"	10	100
15283	1"	0.94"	1.77"	2.93"	5	50
15284	1-1/4"	1.24"	2.20"	3.34"	4	40
15285	1-1/2"	1.45"	2.46"	3.74"	2	20
15286	2"	1.86"	2.93"	4.21"	1	10
15287	2-1/2"	2.22"	3.54"	5.31"	-	6
15288	3"	2.76"	4.25"	6.47"	-	4
15289	3-1/2"	3.54"	4.86"	6.47"	-	3
15290	4"	3.62"	5.24"	6.90"	-	3




- 90° Orientation
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



90° Liquid Tight Connectors - Insulated Throat - Zinc Die Cast



- 90° Orientation
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided




CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I5291	3/8"	0.48"	1.26"	2.09"	15	150
I5292	1/2"	0.56"	1.26"	2.15"	15	150
I5293	3/4"	0.71"	1.52"	2.69"	10	100
I5294	1"	.94"	1.77"	2.98"	5	50
I5295	1-1/4"	1.24"	2.20"	3.40"	4	40
I5296	1-1/2"	1.45"	2.46"	3.80"	2	20
I5297	2"	1.86"	2.93"	4.27"	1	10
I5298	2-1/2"	2.22"	3.54"	5.39"	-	6
I5299	3"	2.76"	4.25"	6.13"	-	4
I5300	3-1/2"	3.33"	4.86"	6.55"	-	3
I5301	4"	3.62"	5.24"	6.98"	-	3

Liquid Tight Connectors - Straight - Insulated Throat - Steel



- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I5200	3/8"	0.98"	0.19"	1.72"	20	200
I5201	1/2"	0.91"	0.47"	1.12"	20	200
I5202	3/4"	1.02"	0.53"	1.37"	20	100
I5203	1"	1.12"	0.65"	1.70"	5	50
I5204	1-1/4"	1.26"	0.67"	2.07"	5	25
I5205	1-1/2"	1.46"	0.69"	2.30"	5	25
I5206	2"	1.50"	0.73"	2.80"	5	25


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Liquid Tight Connectors - 90° - Insulated Throat - Malleable Iron

- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut


CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15180	3/8"	1.28"	0.43"	1.12"	1.51"	10	100
15181	1/2"	1.42"	0.55"	1.30"	1.76"	10	100
15182	3/4"	1.73"	0.59"	1.50"	2.01"	10	100
15183	1"	2.01"	0.65"	1.81"	2.13"	5	50
15184	1-1/4"	2.30"	0.67"	2.20"	2.32"	-	10
15185	1-1/2"	2.62"	0.71"	2.44"	2.60"	-	10
15186	2"	2.99"	0.73"	2.95"	3.03"	-	5



Liquid Tight Connectors - 45° - Insulated Throat - Malleable Iron

- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut


CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15220	3/8"	1.39"	0.49"	1.03"	1.18"	15	150
15221	1/2"	1.89"	0.55"	1.30"	1.34"	10	100
15222	3/4"	1.97"	0.59"	1.50"	1.57"	10	100
15223	1"	2.60"	0.65"	1.81"	1.81"	5	50
15224	1-1/4"	2.76"	0.67"	2.20"	2.09"	-	10
15225	1-1/2"	3.11"	0.71"	2.44"	2.36"	-	10
15226	2"	3.66"	0.73"	2.95"	2.64"	-	5



Liquid Tight Connectors - Straight - Insulated Throat - Malleable Iron

- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15160	3/8"	1.01"	0.24"	1.19"	25	250
15161	1/2"	0.91"	0.55"	1.30"	25	250
15162	3/4"	0.98"	0.59"	1.50"	10	100
15163	1"	1.14"	0.63"	1.81"	5	50
15164	1-1/4"	1.22"	0.67"	2.20"	5	50
15165	1-1/2"	1.30"	0.43"	2.44"	10	50
15166	2"	1.50"	0.73"	2.95"	5	25





Liquid Tight Connectors



STRAIGHT
CONNECTOR

- For use with metallic and non-metallic liquid tight conduit, Type B
- Provides smooth connection
- No sharp edges to damage wire
- Wire easily pulled through



90° ELBOW
CONNECTOR

CAT. NO.	DESCRIPTION	CASE QTY
750-NMLT50	1/2" NON-METALLIC STRAIGHT CONNECTOR	25
750-NMLT75	3/4" NON-METALLIC STRAIGHT CONNECTOR	10
750-NMLT9050	1/2" NON-METALLIC 90 DEGREE ELBOW CONNECTOR	10
750-NMLT9075	3/4" NON-METALLIC 90 DEGREE ELBOW CONNECTOR	10

Single Piece Liquid Tight Fittings



STRAIGHT
CONNECTOR

- Conduit threads onto ferrule and up inside the outer body
- Inside taper squeezes down on conduit for superior liquid tight seal
- Cut portion of conduit does not show, giving a more finished appearance
- Easy to use at a lower cost than regular liquid tight fittings



90° ELBOW
CONNECTOR

CAT. NO.	DESCRIPTION	CASE QTY
750-SLTC50	1/2" STRAIGHT SCREW-ON FITTING	1
750-SLTC9050	1/2" 90° SCREW-ON FITTING	1
750-SLTC75	3/4" STRAIGHT SCREW-ON FITTING	1
750-SLTC9075	3/4" 90° SCREW-ON FITTING	1

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM


1-888-777-6678



Non-Metallic Liquid Tight Connectors - Straight

- Terminate and Seal Non-Metallic Liquid tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
21813	1/2"	1.18"	0.55"	1.42"	25	150
21814	3/4"	1.20"	0.64"	1.69"	10	100
21815	1"	1.23"	0.72"	2.02"	5	50
21816	1-1/4"	2.44"	0.76"	2.40"	5	50
21817	1-1/2"	2.70"	0.80"	2.67"	4	40
21818	2"	2.99"	0.85"	3.28"	2	20

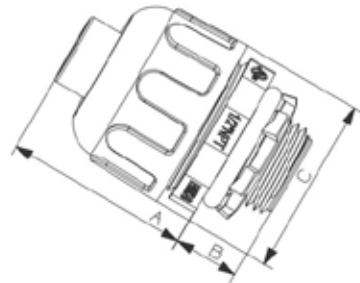

Non-Metallic Liquid Tight Connectors - 90°

- 90° Orientation
- Terminate and Seal Non-Metallic liquid tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
21823	1/2"	2.84"	0.50"	2.03"	25	150
21824	3/4"	3.25"	0.50"	2.33"	10	100
21825	1"	3.54"	0.60"	2.95"	5	50
21826	1-1/4"	4.75"	0.76"	5.20"	3	30
21827	1-1/2"	4.75"	0.80"	5.20"	2	20
21828	2"	5.42"	0.86"	5.80"	1	10



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Polypropylene Stud Bushings




Examples of common hole configurations in metal studs that stud bushing protects

- Fits existing irregular shaped holes in metal studs
- Protects wire insulation from abrasion in metal studs
- Bushing allows smooth wire pulling
- No tools needed
- Use these bushings to comply with paragraph 300-4(b)(1) of the 2005 NEC code which states that: "In both exposed & concealed locations where nonmetallic-sheathed cables pass through either factory or field punched, cut, or drilled slots or holes in metal members, the cable shall be protected by bushings or grommets covering all metal edges & securely fastened in the opening prior to installation of the cable

CAT. NO.	STUD SIZE	DIMENSIONS				BAG QTY
		A	B	C	D	
21760	2"X4"	5.67"	2.50"	0.505"	1.30"	25

Snap Bushings

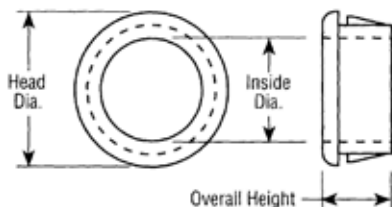

- Eliminate sharp edges & insulate your raw-edged holes in metal chassis
- Easily locks into hole firmly with fingertip pressure
- Protect electrical cables, ropes, utility lines passing through metal
- 1/8" maximum steel thickness
- Made from UL approved Nylon 6/6, 94V-2

CAT. NO.	MOUNTING HOLE DIAMETER	INSIDE DIAMETER	HEAD DIAMETER	OVERALL HEIGHT	BAG QTY
22311	0.28"	0.23"	0.34"	0.24	10
22312	0.31"	0.23"	0.37"	0.31	10
22314	0.37"	0.25"	0.47"	0.41	10
22314B	0.37"	0.25"	0.47"	0.41	1,000
22317	0.55"	0.45"	0.67"	0.41	10
22318	0.63"	0.48"	0.73"	0.41	10
22320	0.75"	0.56"	0.85"	0.41	10
22322	0.87" (1/2" TRADE)	0.68"	0.94"	0.45"	10
22324	0.99"	0.75"	1.10"	0.45"	10
22326	1.17"	0.95"	1.31"	0.45"	10
22328	1.50"	1.14"	1.62"	0.45"	10
22330	1.72"	1.39"	1.88"	0.46"	10
22332	1.97"	1.64"	2.15"	0.46"	10


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Snap Bushings with Shutters

- Flexible shutters to accommodate a variety of cable & hose sizes from a minimum of 1/8" to a maximum as shown in the table
- Shutters absorb vibration & cushion cables, tubes, etc.
- Fingertip pressure snap-locks the bushing into the mounting hole
- Universal design to hold various cable ranges
- 1/8" maximum steel thickness
- Made from UL approved Nylon 6/6, 94V-2



CAT. NO.	MOUNTING HOLE DIAMETER	MAX CABLE SIZE ID	HEAD DIAMETER	OVERALL HEIGHT	BAG QTY
22342	0.63"	0.44"	0.72"	0.41"	10
22344	0.75"	0.50"	0.86"	0.39"	10
22346	0.81"	0.50"	0.89"	0.39"	10
22348	0.87" (1/2" TRADE)	0.56"	0.93"	0.45"	10
22350	1.00"	0.80"	1.12"	0.44"	10
22352	1.09" (3/4" TRADE)	0.88"	1.21"	0.44"	10
22354	1.35" (1" TRADE)	1.15"	1.48"	0.44"	10
22356	1.50"	1.22"	1.61"	0.43"	10




Snap Bushings (Open/Closed)

- Finger tip pressure snap-locks the bushing into the mounting hole
- Can be applied where cables are already installed
- Can accommodate cables too large to fit through the inside diameter of a standard bushing Made from UL approved Nylon 6/6, 94V-2



CAT. NO.	MOUNTING HOLE DIAMETER	INSIDE DIAMETER	HEAD DIAMETER	OVERALL HEIGHT	BAG QTY
22362	3/8"	0.26"	0.42"	0.375"	10
22364	1/2"	0.31"	0.56"	0.375"	10
22368	3/4"	0.52"	0.80"	0.375"	10
22370	7/8"	0.67"	0.92"	0.375"	10
22372	1"	0.80"	1.06"	0.375"	10

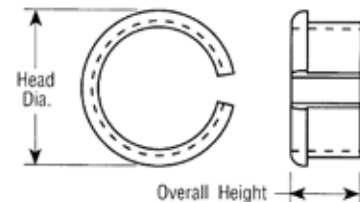



Reducing Washers




- Use to reduce the size of the knockout in a steel outlet box
- Must use one inside the enclosure opening and one on the outside
- Galvanized Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4620	3/4" X 1/2"	1.44"	0.87"	100	1,000
I4621	1" X 1/2"	1.71"	0.87"	100	1,000
I4622	1" X 3/4"	1.74"	1.10"	100	1,000
I4623	1-1/4" X 1/2"	2.08"	0.87"	50	500
I4624	1-1/4" X 3/4"	2.08"	1.125"	50	500
I4625	1-1/4" X 1"	2.08"	1.38"	50	500
I4626	1-1/2" X 1/2"	2.635"	0.87"	50	500
I4627	1-1/2" X 3/4"	2.635"	1.06"	50	500
I4628	1-1/2" X 1"	2.635"	1.335"	50	500
I4629	1-1/2" X 1-1/4"	2.635"	1.69"	50	500
I4630	2" X 1/2"	3.265"	0.87"	25	250
I4631	2" X 3/4"	3.265"	1.06"	25	250
I4632	2" X 1"	3.265"	1.335"	25	250
I4633	2" X 1-1/4"	3.265"	1.69"	25	250
I4634	2" X 1-1/2"	3.265"	1.935"	25	250

Locknuts - Zinc Die Cast


UL LISTED

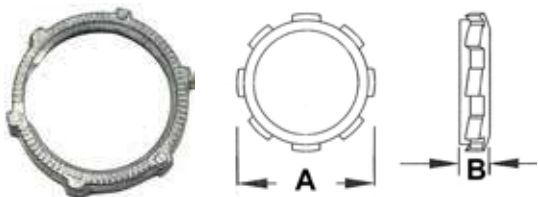

- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4720	1/2"	1.09"	0.12"	100	4,000
I4721	3/4"	1.36"	0.14"	100	2,500
I4722	1"	1.66"	0.16"	50	1,000

Locknuts - Steel

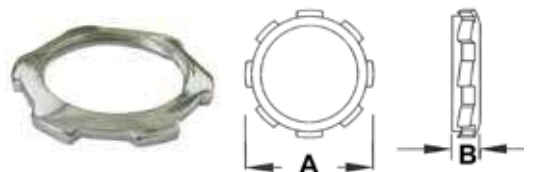

- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4760	1/2"	1.13"	0.10"	-	1,000
I4761	3/4"	1.39"	0.10"	-	1,000
I4762	1"	1.71"	0.13"	-	1,000
I4763	1-1/4"	2.07"	0.13"	50	500
I4764	1-1/2"	2.39"	0.13"	50	500
I4765	2"	2.88"	0.13"	25	250
I4766	2-1/2"	3.45"	0.16"	-	100
I4767	3"	4.14"	0.16"	-	100
I4768	3-1/2"	4.70"	0.16"	-	100
I4769	4"	5.30"	0.16"	-	100
I4770	5"	6.51"	0.37"	-	20
I4771	6"	7.85"	0.37"	-	20

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678



Locknuts - Steel

UL LISTED

- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4730	1/2"	1.13"	0.11"	100	1,000
I4731	3/4"	1.39"	0.12"	100	1,000
I4732	1"	1.71"	0.15"	50	500
I4733	1-1/4"	2.06"	0.15"	25	500
I4734	1-1/2"	2.36"	0.15"	25	200
I4735	2"	2.86"	0.16"	25	200
I4736	2-1/2"	3.43"	0.20"	25	100
I4737	3"	4.11"	0.20"	25	100
I4738	3-1/2"	4.69"	0.21"	25	100
I4739	4"	5.26"	0.22"	25	100
I4740	5"	6.50"	0.43"	-	20
I4741	6"	7.80"	0.43"	-	20



- Sealing locknuts provide a rain tight seal when securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole of a box or enclosure
- Integral Gasket

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4754	1/2"	1.13"	0.21"	100	1,000
I4755	3/4"	1.39"	0.22"	100	1,000
I4756	1"	1.71"	0.31"	100	1,000
I4757	1-1/4"	2.07"	0.29"	50	500
I4758	1-1/2"	2.36"	0.29"	50	500
I4759	2"	2.88"	0.29"	25	250



- Used with bushings to bond threaded rigid conduit and IMC to boxes, cabinets, or other enclosures where locknut is exposed

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4742	1/2"	1.14"	0.17"	100	1,000
I4743	3/4"	1.39"	0.18"	100	1,000
I4744	1"	1.73"	0.24"	50	500
I4745	1-1/4"	2.08"	0.24"	25	200
I4746	1-1/2"	2.40"	0.25"	25	200
I4747	2"	2.91"	0.29"	25	100
I4748	2-1/2"	3.46"	0.29"	25	100
I4749	3"	4.14"	0.30"	25	100
I4750	3-1/2"	4.69"	0.30"	25	100
I4751	4"	5.25"	0.34"	25	100



Grounding Locknuts - Steel

UL LISTED

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com






Rigid Watertight Hubs - Zinc Die Cast



- To secure threaded rigid service entrance conduit & IMC to box or enclosure
- Assembled with 105°C rated flame retardant Lexan throat insulator and sealing ring that completely encircles knockout to prevent contaminants from entering enclosure
- UL Listed and CSA Certified for use in wet locations




CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4800	1/2"	1.41"	1.41"	-	150
I4801	3/4"	1.54"	1.66"	-	120
I4802	1"	1.75"	1.95"	-	50
I4803	1-1/4"	1.69"	2.41"	-	40
I4804	1-1/2"	1.71"	2.69"	-	30
I4805	2"	1.83"	3.20"	-	30
I4806	2-1/2"	2.59"	3.69"	-	10
I4807	3"	2.61"	4.39"	-	6
I4808	3-1/2"	2.53"	4.72"	-	6
I4809	4"	2.56"	5.47"	-	6

Rigid Watertight Hubs with Bonding Screw - Zinc



- Male thread type
- Tapered female thread for Rigid conduit and IMC
- Recessed O-ring seal assures watertight connections
- Insulated throat and bonding locknut is suitable for service entrance application
- Assembled with 105°C rated flame retardant throat insulator and sealing ring
- UL Listed and CSA Certified for use in wet locations

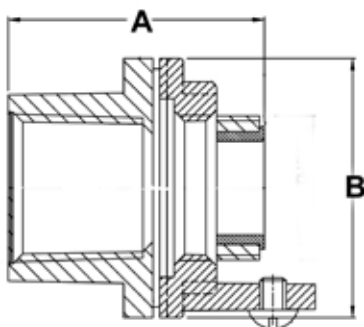

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4810	1/2"	1.42"	1.22"	25	250
I4811	3/4"	1.61"	1.50"	25	150
I4812	1"	1.87"	1.89"	25	100
I4813	1-1/4"	2.01"	2.24"	10	60
I4814	1-1/2"	2.12"	2.52"	10	60
I4815	2"	2.20"	3.03"	10	40
I4816	2-1/2"	2.64"	3.54"	-	12
I4817	3"	2.64"	4.07"	-	12
I4818	3-1/2"	2.70"	4.78"	-	6
I4819	4"	2.70"	5.35"	-	6


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Cord Grips - Zinc Die Cast



CAT. NO.	TRADE SIZE	INSERT COLOR	CABLE RANGE	OVERALL DIM.		INNER BOX	OUTER BOX
			C	A	B		
15450	1/2"	RED	0.190" - 0.260"	1.22"	1.14"	25	250
15451	1/2"	BLUE	0.260" - 0.375"	1.22"	1.14"	25	250
15452	1/2"	GREEN	0.375" - 0.500"	1.22"	1.14"	25	250
15453	3/4"	GREEN	0.375" - 0.500"	1.34"	1.20"	25	250
15454	3/4"	BROWN	0.500" - 0.625"	1.34"	1.20"	25	250
15455	3/4"	ORANGE	0.625" - 0.725"	1.34"	1.20"	25	250
15457	1"	BROWN	0.500" - 0.650"	1.42"	1.69"	10	100
15458	1"	ORANGE	0.625" - 0.750"	1.42"	1.69"	10	100
15459	1"	BLACK	0.750" - 0.880"	1.42"	1.69"	10	100
15460	1"	PURPLE	0.880" - 0.985"	1.42"	1.69"	10	100

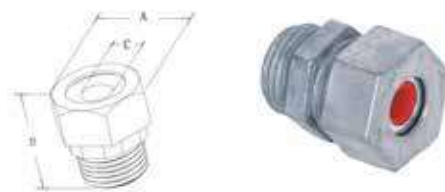

- Use to Connect S, SD, ST, SJ, SJD and SJT Cord to a Steel Outlet Box or other Metal Enclosure
- Neoprene Grommet for a moisture proof seal
- Simple Installation, cord can be installed without disassembly of the fitting
- Liquid-tight/Dil-tight/Rain-tight
- Suitable for NEMA 4 Enclosures and other wet locations
- Male Tapered NPT Threading
- Colored Seal allows for Easy Identification



Metal Cable Glands - NPT Thread

- Used to introduce cables or leads into metal housings, or to introduce reinforced cables
- Working Temp: -40°F to 212°F
- Brass Nickel Plated
- IP 68 (NEMA 6P) rated - Submersible & Dustproof


CAT. NO.	CABLE RANGE	DIMENSIONS			INNER BAG QTY	OUTER BOX QTY
		DI THREAD	GL	H		
22601	0.24" - 0.48"	1/2"	0.51"	0.94"	100	800
22602	0.40" - 0.55"	1/2"	0.51"	0.94"	50	600
22603	0.51" - 0.71"	3/4"	0.51"	0.98"	50	500
22604	0.71" - 0.99"	1"	0.67"	1.14"	25	400



- Cable Glands with Metric threads are now standard and replacements for the PG Cable Glands
- Used to introduce cables or leads into metal housings or to introduce reinforced cables
- Working Temp: -40°F to 212°F
- Brass Nickel Plated
- IP 68 (NEMA 6P) rated - Submersible & Dustproof

Metal Cable Glands - Metric Thread

CAT. NO.	CABLE RANGE	DIMENSIONS			INNER BAG QTY	OUTER BOX QTY
		DI THREAD	GL	H		
22590	0.12" - 0.28"	M12	0.26"	0.75"	100	2,000
22591	0.16" - 0.32"	M16	0.24"	0.83"	100	1,500
22592	0.20" - 0.40"	M16	0.24"	0.83"	100	1,000
22593	0.24" - 0.48"	M20	0.24"	0.91"	100	800
22594	0.40" - 0.55"	M20	0.24"	0.91"	50	600
22595	0.51" - 0.71"	M25	0.28"	1.02"	50	500
22596	0.71" - 0.99"	M32	0.31"	1.22"	20	400
22597	0.87" - 1.26"	M40	0.31"	1.46"	10	160
22598	1.26" - 1.50"	M50	0.35"	1.46"	10	120
22599	1.46" - 1.73"	M63	0.39"	1.50"	10	80

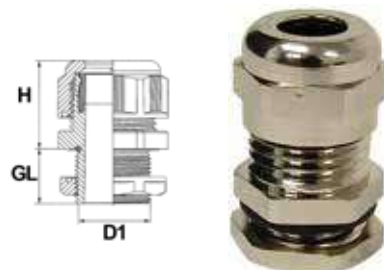




Nylon Cable Glands - NPT Thread




- Internal Ratchet with Self-Locking Feature protects against vibration
- 'Collet' Design Accommodates Various Size Cords, Cables, Tubing, etc.
- Made of UL approved NYLON 66, 94V-2 (Black)
- IP68 Rated Submersible & Dustproof
- UL Recognized
- 94V-2 Flame Rating, -22°F to 140°F Temp Rating
- Locknut Not Included (Sold Separately)

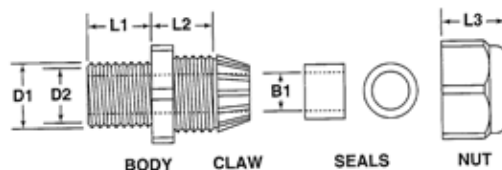

CAT. NO.	NPT THREAD	CABLE RANGE	DIMENSIONS						BAG QTY	MASTER BAG QTY
			D1	D2	B1	L1	L2	L3		
22550	1/4" - 18	0.118" - 0.256"	0.520"	0.327"	0.236"	0.299"	0.500"	0.520"	10	100
22551	3/8" - 18	0.197" - 0.394"	0.646"	0.421"	0.354"	0.575"	0.539"	0.661"	10	100
22552	1/2" - 14	0.394" - 0.551"	0.815"	0.587"	0.500"	0.492"	0.740"	0.724"	10	100
22553	3/4" - 14	0.512" - 0.709"	1.008"	0.728"	0.650"	0.575"	0.701"	0.878"	10	100
22554	1" - 11.5	0.709" - 0.984"	1.299"	1.024"	0.933"	0.579"	0.811"	1.071"	10	100
22555	1-1/4" - 11.5	0.866" - 1.260"	1.642"	1.260"	1.142"	0.705"	0.882"	1.236"	10	100


Nylon Cable Glands - NPT Thread - 90°



- 90° Orientation
- UV Resistant Black
- 94V-2 Flame Rating, -22°F to 140°F Temp Rating
- IP68 Rated Submersible & Dustproof

CAT. NO.	NPT THREAD	CABLE RANGE	MOUNTING HOLE DI	DIMENSIONS							BAG QTY	MASTER BAG QTY
				D2	B1	L1	L2	L3	L	H		
22582	3/8" - 18	0.02" - 0.35"	0.47"	0.65"	0.37"	0.46"	0.39"	0.66"	1.91"	1.18"	10	100
22584	1/2" - 1/4"	0.39" - 0.51"	0.55"	0.83"	0.51"	0.58"	0.46"	0.72"	2.03"	1.23"	10	100
22586	3/4" - 1/4"	0.51" - 0.63"	0.76"	1.04"	0.65"	0.58"	0.49"	0.88"	2.54"	1.64"	10	100
22588	1-1/4" - 11.5	0.87" - 1.14"	1.24"	1.64"	1.15"	0.74"	0.64"	1.22"	3.35"	2.09"	10	100

Nylon NPT Lock Nuts



- Nylon 66 Material
- NPT Thread
- Hexagonal Head
- UL 94 V-2 Flame Rating

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		W	H	
22556	1/4"	0.67"	0.19"	50
22557	3/8"	0.87"	0.20"	50
22558	1/2"	1.06"	0.24"	50
22559	3/4"	1.30"	0.28"	50
22560	1"	1.66"	0.32"	25
22561	1-1/4"	1.92"	0.35"	10

Nylon Cable Glands - Multi-Conductor - NPT Thread

- Multi-Hole Design organizes Multiple Cables within a Gland
- -22°F to 140°F Temperature Rating
- UV Resistant Black
- Made of UL Approved NYLON 66
- Flammability Rating: 94V-2
- IP68 Rated Submersible & Dustproof
- Locknut Not Included (Sold Separately)



CAT. NO.	NPT THREAD	CABLE RANGE	DIMENSIONS DI	LI	BAG QTY	MASTER BAG
----------	------------	-------------	---------------	----	---------	------------

2 HOLE GLAND


22230	1/4"-18	0.078" - 0.122"	0.52"	0.31"	10	100
22231	3/8"-18	0.064" - 0.102"	0.66"	0.57"	10	100
22232	3/8"-18	0.078" - 0.122"	0.66"	0.57"	10	100
22233	3/8"-18	0.118" - 0.161"	0.66"	0.57"	10	100
22234	1/2"-14	0.064" - 0.102"	0.83"	0.51"	10	100
22235	1/2"-14	0.098" - 0.138"	0.83"	0.51"	10	100
22236	1/2"-14	0.130" - 0.170"	0.83"	0.51"	10	100
22237	1/2"-14	0.157" - 0.240"	0.83"	0.51"	10	100
22238	3/4"-14	0.098" - 0.138"	1.04"	0.57"	10	100
22239	3/4"-14	0.138" - 0.200"	1.04"	0.57"	10	100
22240	3/4"-14	0.200" - 0.256"	1.04"	0.57"	10	100
22241	3/4"-14	0.252" - 0.343"	1.04"	0.57"	10	100
22242	1"-11.5	0.142" - 0.205"	1.31"	0.59"	10	100
22243	1"-11.5	0.200" - 0.256"	1.31"	0.59"	10	100
22244	1"-11.5	0.252" - 0.343"	1.31"	0.59"	10	100
22245	1"-11.5	0.308" - 0.394"	1.31"	0.59"	10	100
22246	1-1/4"-11.5	0.276" - 0.354"	1.65"	0.72"	10	100
22247	1-1/4"-11.5	0.433" - 0.512"	1.65"	0.72"	10	100

3 HOLE GLAND

22248	1/4"-18	0.063" - 0.102"	0.52"	0.31"	10	100
22249	3/8"-18	0.063" - 0.102"	0.66"	0.57"	10	100
22250	3/8"-18	0.118" - 0.165"	0.66"	0.57"	10	100
22251	1/2"-14	0.078" - 0.118"	0.83"	0.51"	10	100
22252	1/2"-14	0.118" - 0.165"	0.83"	0.51"	10	100
22253	1/2"-14	0.138" - 0.205"	0.83"	0.51"	10	100
22254	3/4"-14	0.102" - 0.142"	1.04"	0.57"	10	100
22255	3/4"-14	0.142" - 0.205"	1.04"	0.57"	10	100
22256	3/4"-14	0.188" - 0.244"	1.04"	0.57"	10	100
22257	3/4"-14	0.244" - 0.315"	1.04"	0.57"	10	100
22258	1"-11.5	0.142" - 0.205"	1.31"	0.59"	10	100
22259	1"-11.5	0.188" - 0.244"	1.31"	0.59"	10	100
22260	1"-11.5	0.244" - 0.315"	1.31"	0.59"	10	100
22261	1"-11.5	0.303" - 0.394"	1.31"	0.59"	10	100
22262	1-1/4"-11.5	0.256" - 0.327"	1.65"	0.72"	10	100
22263	1-1/4"-11.5	0.303" - 0.394"	1.65"	0.72"	10	100

4 HOLE GLAND

22264	1/4"-18	0.051" - 0.091"	0.52"	0.31"	10	100
22265	3/8"-18	0.051" - 0.091"	0.66"	0.57"	10	100
22266	3/8"-18	0.094" - 0.134"	0.66"	0.57"	10	100
22267	1/2"-14	0.055" - 0.094"	0.83"	0.51"	10	100
22268	1/2"-14	0.094" - 0.134"	0.83"	0.51"	10	100
22269	1/2"-14	0.134" - 0.189"	0.83"	0.51"	10	100
22270	3/4"-14	0.063" - 0.098"	1.04"	0.57"	10	100
22271	3/4"-14	0.098" - 0.142"	1.04"	0.57"	10	100
22272	3/4"-14	0.150" - 0.205"	1.04"	0.57"	10	100
22273	3/4"-14	0.220" - 0.287"	1.04"	0.57"	10	100
22274	1"-11.5	0.079" - 0.122"	1.31"	0.59"	10	100
22275	1"-11.5	0.118" - 0.161"	1.31"	0.59"	10	100
22276	1"-11.5	0.150" - 0.205"	1.31"	0.59"	10	100
22277	1"-11.5	0.220" - 0.287"	1.31"	0.59"	10	100
22278	1"-11.5	0.276" - 0.354"	1.31"	0.59"	10	100
22279	1-1/4"-11.5	0.394" - 0.472"	1.65"	0.72"	10	100

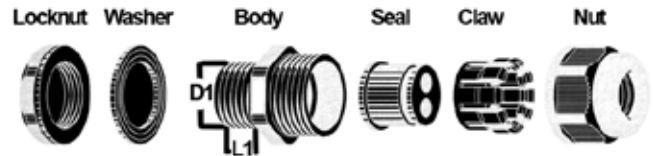

CAT. NO.	NPT THREAD	CABLE RANGE	DIMENSIONS DI	LI	BAG QTY	MASTER BAG
----------	------------	-------------	---------------	----	---------	------------

5 HOLE GLAND

22280	3/8"-18	0.079" - 0.110"	0.66"	0.57"	10	100
22281	1/2"-14	0.051" - 0.079"	0.83"	0.51"	10	100
22282	1/2"-14	0.079" - 0.110"	0.83"	0.51"	10	100
22283	1/2"-14	0.118" - 0.161"	0.83"	0.51"	10	100
22284	3/4"-14	0.047" - 0.079"	1.04"	0.57"	10	100
22285	3/4"-14	0.079" - 0.122"	1.04"	0.57"	10	100
22286	3/4"-14	0.118" - 0.161"	1.04"	0.57"	10	100
22287	3/4"-14	0.142" - 0.181"	1.04"	0.57"	10	100
22288	3/4"-14	0.181" - 0.236"	1.04"	0.57"	10	100
22289	1"-11.5	0.102" - 0.142"	1.31"	0.59"	10	100
22290	1"-11.5	0.142" - 0.181"	1.31"	0.59"	10	100
22291	1"-11.5	0.181" - 0.237"	1.31"	0.59"	10	100
22292	1"-11.5	0.237" - 0.315"	1.31"	0.59"	10	100
22293	1-1/4"-11.5	0.256" - 0.327"	1.65"	0.72"	10	100

6 HOLE GLAND

22294	3/8"-18	0.055" - 0.083"	0.66"	0.57"	10	100
22295	1/2"-14	0.051" - 0.079"	0.83"	0.51"	10	100
22296	1/2"-14	0.079" - 0.118"	0.83"	0.51"	10	100
22297	3/4"-14	0.055" - 0.083"	1.04"	0.57"	10	100
22298	3/4"-14	0.079" - 0.118"	1.04"	0.57"	10	100
22299	3/4"-14	0.102" - 0.142"	1.04"	0.57"	10	100
22300	3/4"-14	0.142" - 0.205"	1.04"	0.57"	10	100
22301	1"-11.5	0.102" - 0.142"	1.31"	0.59"	10	100
22302	1"-11.5	0.142" - 0.205"	1.31"	0.59"	10	100
22303	1"-11.5	0.220" - 0.276"	1.31"	0.59"	10	100

7 HOLE GLAND


22304	1/2"-14	0.051" - 0.079"	0.83"	0.51"	10	100
22305	1/2"-14	0.079" - 0.118"	0.83"	0.51"	10	100
22306	3/4"-14	0.051" - 0.079"	1.04"	0.57"	10	100
22307	3/4"-14	0.079" - 0.118"	1.04"	0.57"	10	100
22308	3/4"-14	0.102" - 0.142"	1.04"	0.57"	10	100
22309	1"-11.5	0.102" - 0.142"	1.31"	0.59"	10	100
22310	1"-11.5	0.181" - 0.236"	1.31"	0.59"	10	100



Nylon Cable Glands - Metric Thread



- Threads into your panel for clearance, locknut included
- Internal Ratchet with Self-Locking Feature protects against vibration
- 'Collet' Design Accommodates Various Size Cords, Cables, Tubing, etc.
- Nylon Body Material is resistant to most common chemicals & solvents
- For Best Results, Use the Minimum Size that accommodates your cable
- No Disassembly Required
- Made of UL approved NYLON 66, 94V-2 (Black)
- -22°F to 140°F Temperature Rating
- IP68 Rated Submersible & Dustproof
- Metric Thread - Does not have NPT threading

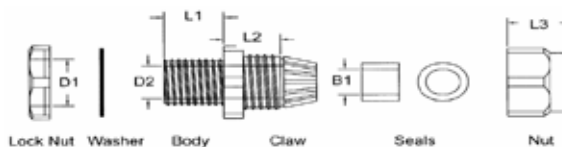


CAT. NO.	MOUNTING HOLE (D1)	CABLE RANGE	THREAD PITCH (MM)	DIMENSIONS					BAG QTY	MASTER BAG QTY
				D2	B1	L1	L2	L3		
22532*	0.47"	0.12" - 0.26"	M12 - 1.25	0.33"	0.24"	0.31"	0.48"	0.52"	10	100
22534	0.63"	0.20" - 0.39"	M16 - 1.50	0.43"	0.38"	0.62"	0.57"	0.66"	10	100
22536	0.79"	0.39" - 0.55"	M20 - 1.50	0.58"	0.51"	0.59"	0.78"	0.72"	10	100
22538	0.98"	0.51" - 0.71"	M25 - 1.50	0.73"	0.65"	0.59"	0.74"	0.88"	10	100
22540	1.26"	0.71" - 0.98"	M32 - 1.50	1.02"	0.92"	0.58"	0.80"	1.03"	10	100
22542	1.57"	0.87" - 1.26"	M40 - 1.50	1.30"	1.20"	0.70"	0.92"	1.24"	10	100
22544*	1.97"	1.18" - 1.50"	M50 - 1.50	1.62"	1.50"	0.68"	1.01"	1.24"	10	100
22546*	2.40"	1.34" - 1.73"	M61 - 1.50	2.13"	1.73"	0.73"	1.06"	1.28"	10	100
22548*	2.48"	1.65" - 1.97"	M63 - 1.50	2.20"	1.95"	1.00"	1.16"	1.43"	10	100

*Not UL Recognized

Nylon Cable Glands - Metric Thread (With Strain Relief)



- Extended Cord Support Strain Relief Feature
- Threads into your panel for clearance, locknut included
- Internal Ratchet with Self-Locking Feature protects against vibration
- 'Collet' Design Accommodates Various Size Cords, Cables, Tubing, etc.
- For Best Results, Use the Minimum Size that fits into your cable
- No Disassembly Required
- Made of UL approved NYLON 66, 94V-2 (Black)
- -22°F to 140°F Temperature Rating
- IP68 Rated Submersible & Dustproof
- Metric Thread - Does not have NPT threading

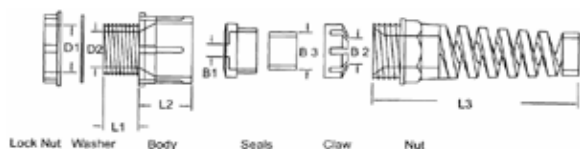

CAT. NO.	MOUNTING HOLE (D1)	CABLE RANGE	THREAD PITCH (MM)	DIMENSIONS					BAG QTY	MASTER BAG QTY
				D2	B1	L1	L2	L3		
22562*	0.47"	0.12" - 0.26"	M12 - 1.25	0.33"	0.24"	0.31"	0.48"	0.52"	10	100
22564	0.63"	0.20" - 0.39"	M16 - 1.50	0.43"	0.38"	0.62"	0.57"	0.66"	10	100
22566	0.79"	0.39" - 0.55"	M20 - 1.50	0.58"	0.51"	0.59"	0.78"	0.72"	10	100
22568	0.98"	0.51" - 0.71"	M25 - 1.50	0.73"	0.65"	0.59"	0.74"	0.88"	10	100


*Not UL Recognized



NM Cable Connector



- Accommodates:
 - One or Two 14-2, 14-3 and 12-2 Cables,
 - One 12-3, 10-2 and 10-3 cable,
 - One or Two 0.300" to 0.600" Diameter Cords
- Push-in Design with a Captive Locking Wedge that secures cable with a single squeeze with pliers
- Excellent Insulation and Superior Strain Relief
- Sized to fit 1/2" Knockout




CAT. NO.	SIZE	DIMENSIONS			BAG QTY	CASE QTY
		A	B	C		
21762	1/2"	1-3/8"	1/2"	1"	50	1,000



NM Cable Connector

- Smaller and Easily Installed in confined areas
- No tools Required
- Simple Snap-in Installation
- Easily Removed from Knockouts and Easy Removal of NM from Connector
- A Labor Saving Connector with 60 pound Test Pull




CAT. NO.	SIZE	CABLE SIZE	COLOR	DIMENSIONS			BAG QTY	CASE QTY
				A	B	C		
21764	1/2"	SINGLE CABLE 14/2 - 10/3 TWO CABLES 14/2, 12/2, 14/3	GRAY	1"	3/8"	15/16"	100	3,000
21765	3/4"	THREE CABLES (3)#6 - (3)#8	BLACK	1-5/16"	5/8"	1"	50	1,000



NM Cable Connector

- No tools Required
- Simple Snap-in Installation
- Easily Removed from Knockouts and Easy Removal of NM from Connector



CAT. NO.	KO SIZE	CABLE SIZE	DIAMETER "A"	BAG QTY	CASE QTY
21766	1/2"	14/2 OR 12/2	1-1/16"	100	5,000

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




3/8" NM Connector - Zinc Die Cast



- Used to connect Non-Metallic Sheath Cable and Flexible Cord from 0.30" to 0.45" in diameter to Outlet Boxes, Enclosures, or Raceway Systems
- 3/8" size fits 1/2" knockout
- Assembled with Zinc Die Cast Locknut and Combo Screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15330	3/8"	0.78"	0.35"	100	1,000


Non-Watertight NM Round Connectors - Zinc Die Cast



- Used with Locknut to Terminate Service Entrance Cable to Enclosure
- Assembled with Zinc Die Cast Locknut and Combo Screws
- For Type SEU and NM Cable

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15331	3/4"	0.83"	0.32"	0.83"	1.67"	40	400
15332	1"	1.14"	0.55"	1.04"	1.95"	20	200
15333	1-1/4"	1.24"	0.57"	1.38"	2.20"	15	150
15334	1-1/2"	1.40"	0.57"	1.61"	2.60"	10	100
15335	2"	1.50"	0.65"	2.05"	3.03"	8	80


Non-Watertight NM Oval Connectors - Zinc Die Cast



- Used with Locknut to Terminate NM Cable to Enclosure
- Assembled with Zinc Die Cast Locknut and Combo Screws
- For NM Oval Cable

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15337	1-1/4"	2.26"	1.29"	1.91"	10	100
15338	1-1/2"	2.84"	1.30"	2.19"	10	100
15339	2"	3.48"	1.51"	2.76"	5	50

Tilt-in NM Connectors - Steel



- To terminate one or more Non-Metallic Sheathed Cables to a Knockout in a dry location box or enclosure
- Zinc Plated Steel
- No locknut Required

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
19012	1/2"	1.31"	0.59"	100	1000
19013	3/4"	1.73"	0.75"	-	100
19014	1-1/4"	1.97"	0.69"	-	50
19015	1-1/2"	2.52"	0.78"	25	250



BX/Flex Set Screw Box Connectors - Zinc Die Cast

- Use to connect 14/2 BX cable to a Steel Box or other Metal Enclosure
- Suitable for #14-2 Steel armored cable
- 3/8" size - fits 1/2" Knockout
- Furnished with Zinc Die-Cast locknuts
- Combo Head Screws


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15052	3/8"	0.79"	0.97"	0.39"	50	500



Flex Angled Set Screw Box Connectors - Zinc Die Cast

- Use to connect Steel or Aluminum Flexible Metallic Conduit to a Steel Box or other Metal Enclosure
- Angled Combo Head Set Screw for Easy Access
- Furnished with Die Cast Zinc locknuts

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15053	1/2"	1.20"	1.46"	25	250
15054	3/4"	1.33"	1.56"	25	250

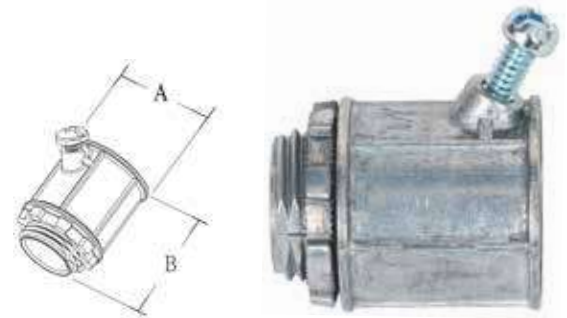

Flex 2 Set Screw - Strap Type Multi-Purpose Box Connectors

- Terminate flexible metallic conduit FMC, AC, MC, or NM cable to a Steel box or other enclosure:
 - 14/2, 12/2 or 12/3 NM Cable
 - 14/2 Thru 12/4 AC or MC Cable
 - 3/8" FMC
- 3/8" Trade Size fits a 1/2" knockout
- Male Hub - NPSM Thread
- Combination Head Screws
- Zinc Die Cast




CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15058	3/8"	0.78"	0.35"	100	1,000



Flex Saddle Box Connector For AC & MC Flex Conduits - Zinc

- Use to connect flexible metal conduit, AC, MC and NM sheathed cable to a Steel Box or other Metal Enclosure
- 3/8" size fits 1/2" knockout
- End Stopped
- Combo Head Screws
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B (MIN)	B (MAX)		
15060	3/8"	0.93"	0.40"	0.50"	500	500

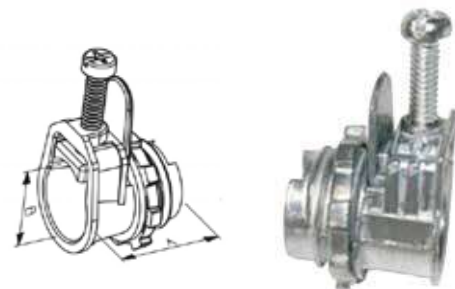



Flex Duplex Box Connectors - Zinc Die Cast



FIG 1






FIG 2



- Use to connect two pieces of Flexible Metallic Conduit, AC, MC, or NM sheathed cable to a steel box or other metal enclosure when using only one knockout opening:
 - 14/2 Thru 12/3 NM
 - 14/2 Thru 10/4 AC
 - 14/2 Thru 10/3 MC
 - 3/8" FMC
- 3/8" size fits 1/2" knockout
- One Screw or Two Screw design

CAT. NO.	FIG.	TRADE SIZE	# OF SCREWS	DIMENSIONS			INNER BOX	OUTER BOX
				A	B	C		
15065	1	3/8"	1	1.59"	1.62"	0.46"	25	250
15066	2	3/8"	2	1.57"	0.61"	2.32"	25	250


90° Flex Conduit Duplex Box Connector - Zinc Die Cast



- Use to connect two pieces of Flexible Metallic Conduit, AC, MC or NM sheathed cable to a steel outlet box or other metal enclosure when using only one knockout opening in a dry location:
 - 14/2 Thru 10/3 NM
 - 14/2 Thru 10/4 AC
 - 14/2 Thru 10/3 MC
 - 3/8" FMC
- 3/8" size fits 1/2" knockout
- Two Combo Head Mounting Screws

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15067	3/8"	2.02"	1.64"	1.24"	25	250

Anti-Short Bushings



- Insulates conductor from cut armor ends on flexible BX or Greenfield conduit
- Overlapping horizontal flange protects against sharp metal edges
- Polypropylene material resists weather extremes oil, moisture and chemicals
- Rated up to 194°F

CAT. NO.	SIZE	CABLE SIZES	DIMENSIONS				BAG QTY
			A	B	C	D	
21752	0	14/2, 14/3, 12/2	0.56"	0.671"	0.38"	0.312"	35
21753	1	14/4, 12/3, 6/1, 4/1	0.65"	0.671"	0.45"	0.312"	35
21754	2	12/4, 10/2, 10/3, 2/1	0.61"	0.859"	0.58"	0.125"	35
21755	3	10/4, 8/2, 8/3, 1/1	0.67"	1.046"	0.79"	0.109"	20
21756	4	8/4, 6/4, 6/3, 6/2, 4/3, 4/2	0.83"	1.266"	1.00"	0.156"	16

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Screw-In Connector For Greenfield/Flex Conduit



- Use to connect Flexible Metallic Conduit to steel outlet box, load center or other metal enclosure
- Zinc Die Cast
- Assembled with Zinc Die Cast locknut


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15070	3/8"	1.22"	0.38"	1.10"	80	800
15071	1/2"	1.30"	0.64"	1.10"	60	600
15072	3/4"	1.52"	0.81"	1.38"	35	350
15073	1"	1.87"	1.00"	1.70"	15	150
15074	1-1/4"	2.13"	1.27"	2.10"	10	100
15075	1-1/2"	2.32"	1.51"	2.42"	6	60
15076	2"	2.48"	2.02"	2.98"	3	30



Screw-In Connector Insulated Throat For Greenfield/Flex Conduit

- Use to connect Flexible Metallic Conduit to steel outlet box, load center or other metal enclosure
- Insulated Throat
- Zinc Die Cast
- Assembled with Zinc Die Cast locknut


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B (OD)	C		
15077	3/8"	1.26"	0.38"	1.10"	80	800
15078	1/2"	1.34"	0.64"	1.10"	60	600
15079	3/4"	1.56"	0.81"	1.38"	35	350
15080	1"	1.91"	1.00"	1.70"	15	150
15081	1-1/4"	2.17"	1.27"	2.10"	10	100
15082	1-1/2"	2.36"	1.51"	2.42"	6	60
15083	2"	2.52"	2.02"	2.98"	3	30



Screw-In Couplings For Greenfield/Flex Conduit

- Use to connect two pieces of Flexible Metal Conduit
- Zinc Die Cast


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15084	1/2"	1.81"	0.91"	0.20"	40	400
15085	3/4"	2.09"	1.10"	0.24"	25	250
15086	1"	2.40"	1.36"	0.32"	15	150
15087	1-1/4"	2.76"	1.66"	0.32"	10	100
15088	1-1/2"	3.08"	1.93"	0.32"	6	60
15089	2"	3.32"	2.48"	0.32"	3	30



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Straight Squeeze Box Connectors




- Used with a locknut to terminate steel or aluminum Flexible Metal Conduit, Armored Cable & MC to enclosure
- Assembled with Zinc Die Cast Locknut & Combo Screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15110	3/8"	1.15"	0.35"	50	500
15111	1/2"	1.44"	0.59"	25	250
15112	3/4"	1.58"	0.77"	25	250
15113	1"	1.76"	0.98"	-	100
15114*	1-1/4"	1.87"	1.21"	-	100
15115*	1-1/2"	2.01"	1.41"	-	50
15116*	2"	2.09"	1.95"	4	40
15117*	2-1/2"	2.85"	2.32"	-	10
15118*	3"	2.24"	2.82"	-	10
15119*	3-1/2"	4.06"	3.28"	-	10
15120*	4"	4.16"	3.76"	-	10

* Flexible Metal Conduit Only

BX - Flex - MC

Straight Squeeze Box Connectors - Insulated Throat



- Used with a locknut to terminate steel or aluminum Flexible Metal Conduit, Armored Cable & MC to Enclosure
- Insulated Throat
- Assembled with Zinc Die Cast Locknut & Combo screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15121	1/2"	1.44"	0.54"	25	250
15122	3/4"	1.58"	0.70"	25	250
15123	1"	1.76"	0.92"	10	100
15124*	1-1/4"	1.87"	1.65"	10	100
15125*	1-1/2"	2.01"	1.97"	5	50
15126*	2"	2.09"	2.47"	4	40
15127*	2-1/2"	2.85"	2.32"	-	18
15128*	3"	2.24"	2.82"	-	12
15129*	3-1/2"	4.06"	3.28"	-	8
15130*	4"	4.24"	3.76"	-	8

* Flexible Metal Conduit Only

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com


WWW.MORRISPRODUCTS.COM

1-888-777-6678



Squeeze Box Connectors 90°

- Used with a locknut to Terminate Steel or Aluminum Flexible Metal Conduit, AC and MC Cable to a steel outlet box or other metal enclosure
- Assembled with Zinc Die Cast Locknut & Combo Screws

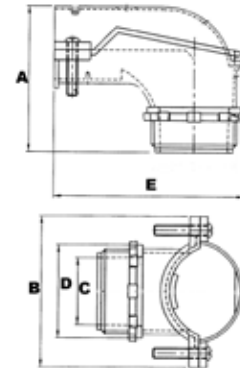


CAT. NO.	TRADE SIZE	DIMENSIONS					INNER BOX	OUTER BOX
		A	B	C	D	E		
15131	3/8"	1.22"	1.34"	0.63"	0.97"	1.75"	50	500
15132	1/2"	1.50"	1.65"	0.63"	0.97"	2.12"	25	250
15133	3/4"	1.58"	1.89"	0.86"	1.20"	2.35"	10	100
15134	1"	2.26"	2.38"	1.04"	1.45"	2.77"	5	50
15135*	1-1/4"	2.76"	2.68"	1.42"	1.86"	3.89"	10	40
15136*	1-1/2"	4.06"	3.76"	1.58"	2.32"	6.01"	2	12
15137*	2"	4.08"	3.76"	2.07"	2.66"	6.01"	2	12
15138*	2-1/2"	6.90"	5.40"	2.50"	3.07"	6.80"	-	10
15139*	3"	7.80"	5.70"	3.15"	3.71"	7.89"	-	6
15140*	3-1/2"	9.40"	7.52"	3.46"	4.53"	5.66"	-	3
15141*	4"	10.50"	8.28"	3.94"	5.04"	9.78"	-	3

* Flexible Metal Conduit Only



Squeeze Box Connectors 90° - Insulated Throat

- Used with a locknut to Terminate Steel or Aluminum Flexible Metal Conduit, AC and MC Cable to a steel outlet box or other metal enclosure
- Insulated Throat
- Assembled with Zinc Die Cast Locknut & Combo Screws

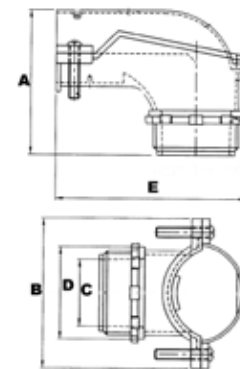


CAT. NO.	TRADE SIZE	DIMENSIONS					INNER BOX	OUTER BOX
		A	B	C	D	E		
15142	3/8"	1.26"	1.34"	0.55"	0.97"	1.81"	50	500
15143	1/2"	1.54"	1.65"	0.55"	0.97"	2.18"	25	250
15144	3/4"	1.61"	1.89"	0.73"	1.20"	2.41"	10	100
15145	1"	2.26"	2.38"	0.96"	1.46"	2.83"	5	50
15146*	1-1/4"	2.82"	2.68"	1.24"	1.81"	2.85"	10	40
15147*	1-1/2"	4.08"	3.76"	1.44"	2.32"	6.01"	2	12
15148*	2"	4.08"	3.76"	1.89"	2.58"	6.01"	2	12
15149*	2-1/2"	6.90"	5.40"	2.30"	3.07"	6.875"	-	6
15150*	3"	7.80"	5.70"	2.95"	3.70"	7.97"	-	4
15151*	3-1/2"	9.40"	7.52"	3.27"	4.53"	5.57"	-	3
15152*	4"	10.50"	8.26"	3.74"	5.04"	9.86"	-	3

* Flexible Metal Conduit Only

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




EMT to Flex Combination Coupling Squeeze Type - Zinc Die Cast



- Use to join EMT Conduit to Flexible Metal Conduit
- They allow a quick connection between different conduits to create one continuous raceway
- Their smooth interior surface ensures a snag free wire pull every time

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
15416	1/2"	1.65"	1.42"	25	250
15417	3/4"	1.97"	1.55"	15	150
15418	1"	2.00"	1.63"	-	200


EMT to BX or NM Cable Combination Set Screw Couplings



- Set Screw 1/2" EMT to 2 Screw 3/8" BX/NM Cable
- Used on EMT Conduit, BX cable, NM cable
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15411	1/2"	1.33"	0.93"	0.73"	50	500

EMT to Greenfield Combination Compression Couplings



- To join EMT to Flexible Metallic Conduit
- Compression for EMT and Screw-In for Flex Conduit
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15420	1/2"	1.61"	0.98"	0.57"	50	500
15421	3/4"	1.87"	1.20"	0.73"	25	250
15422	1"	1.96"	1.43"	0.92"	10	100


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Water-Tight Service Entrance Connectors - Zinc Die-Cast



CAT. NO.	TRADE SIZE	CABLE SIZE	MAX GROMMET OPENING		OVERALL DIMENSIONS		INNER BOX	OUTER BOX
			LENGTH	WIDTH	A	B		
15370	1"	#8	0.67"	0.40"	1.67"	1.45"	20	100
15371	1"	#6	0.77"	0.50"	1.67"	1.45"	20	100
15372	1"	#4	0.81"	0.53"	1.67"	1.45"	20	100
15373	1-1/4"	#3	0.92"	0.56"	2.05"	1.80"	10	50
15374	1-1/4"	#2	0.98"	0.59"	2.05"	1.80"	10	50
15375	1-1/4"	#1	1.09"	0.65"	2.05"	1.80"	10	50
15377	1-1/2"	#2/0	1.34"	0.86"	2.31"	2.02"	10	50
15379	2"	#2/0	1.34"	0.86"	2.82"	2.39"	5	25
15380	2"	#3/0	1.37"	0.87"	2.82"	2.39"	5	25
15381	2"	#4/0	1.50"	0.90"	2.82"	2.39"	5	25
15382	2"	#4/0	1.73"	1.11"	2.82"	2.39"	5	25

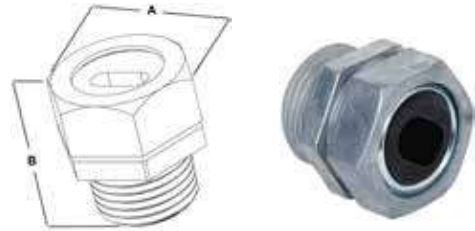

- Compression Type SEU Connector
- Used to Connect Service Entrance Cable to a Service Enclosure in Wet Locations
- Accepts 2 Insulated Conductors, 1 Bare
- U/Flat Style Conductor Only
- Assembled with Rubber Grommet and Steel Washer
- Locknut Included



Underground Feed UF To Box Connector - Zinc Die Cast

- Used to Connect Underground Feeder Cables (UF) To Weatherproof Enclosures in Wet Locations.
- Assembled with a Rubber Grommet and Steel Washer
- Sealing Locknut System




CAT. NO.	TRADE SIZE	CABLE SIZE	MAX GROMMET OPENING		OVERALL DIMENSIONS		INNER BOX	OUTER BOX
			L	W	A	B		
15386	1/2"	14/2, 12/2, 10/2	0.475"	0.235"	1.22"	1.14"	25	250
15387	3/4"	14/3, 12/3, 10/3, 8/2	0.720"	0.260"	1.34"	1.20"	25	250

Kenny Clamps


- UL 467 listed connector for use with Equipment Ground Conductors, Ground Electrode Conductors and Bonding Jumpers
- Assures good metallic connection and low impedance path for grounding
- Brass

CAT. NO.	MODEL NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
			A	B		
15390	KC8ST	8 AWG STRANDED	1.75"	1.06"	10	100
15391	KC8SO	8 AWG SOLID	1.75"	1.06"	10	100
15392	KC6SO	6 AWG SOLID	1.75"	1.06"	10	100
15393	KC6ST	6 AWG STRANDED	1.75"	1.06"	10	100
15394	KC4SO	4 AWG SOLID	1.75"	1.06"	10	100
15395	KC4ST	4 AWG STRANDED	1.75"	1.06"	10	100
15396	KC2ST	2 AWG STRANDED	1.75"	1.06"	10	100
15397	KCI1AST	1/0 STRANDED	1.75"	1.06"	10	100
15398	KC2AST	2/0 STRANDED	1.75"	1.06"	10	100
15399	KC3AST	3/0 STRANDED	1.75"	1.06"	10	100

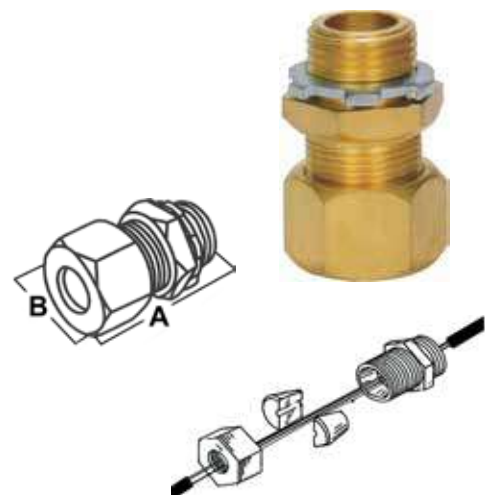




Non-Metallic Service Entrance Cable Hoods

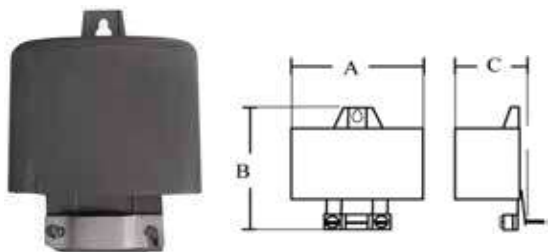

- Provides Protection to Service Entrance Cables
- Non-Metallic PVC construction
- Suitable for Outdoor use

CAT. NO.	CABLE SIZE	DIMENSIONS			BOX QTY
		A	B	C	
15500	(3)#3 TO #1	4.25"	6.02"	2.00"	10
15501	(3)2/0 TO 4/0	5.90"	6.12"	2.50"	10

Aluminum Service Entrance Caps - SEU Cable

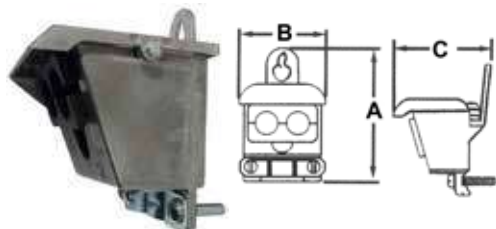

- Used with Type U Service Entrance Cable
- Removable Cap and 2 Piece Insulator Make Wire Pulling and Assembly Easy
- Cable Clamp
- Suitable for Outdoor use

CAT. NO.	CABLE SIZE	DIMENSIONS			BOX QTY
		A	B	C	
15502	(3)#8 TO #1	2.96"	2.76"	2.59"	175
15504	(3)1/0 TO 4/0	4.48"	3.79"	3.60"	54


PVC Entrance Caps - Cable Clamp



- Rigid, weather-resistant material assembled with a Galvanized Back Plate for easy installation

CAT. NO.	SIZE	CABLE SIZE	DIMENSIONS		BOX QTY
			A	B	
21772	SMALL	(3) #8, 6, 4, 2	2.75"	2.80"	20
21773	MEDIUM	(3) 1/0 TO 2/0	4.25"	4.90"	10
21774	LARGE	(3) 3/0 TO 4/0	4.25"	4.90"	10

PVC Entrance Caps - Conduit Mount



- Entrance head for mounting on PVC, RIGID, IMC and EMT Conduit (Red adaptor included for EMT)
- Rugged Non-Metallic Design is resistant to adverse weather conditions
- Provides 50% Larger Wiring Compartment than other entrance heads
- Entire Head acts as an Insulator of high dielectric strength

CAT. NO.	SIZE	DIMENSIONS									BOX QTY
		A	B	C	D	E	F	G	H	J	
21782	1/2"	2.00"	2.71"	1.50"	1.97"	0.69"	0.94"	0.86"	2.61"	0.31"	200
21783	3/4"	2.41"	2.30"	1.72"	2.23"	0.81"	0.94"	1.07"	1.25"	0.44"	140
21784	1"	2.41"	2.30"	1.97"	2.23"	0.81"	1.13"	1.33"	1.31"	0.44"	140
21785	1-1/4"	3.03"	4.03"	2.34"	2.66"	0.88"	1.09"	1.68"	1.89"	0.53"	75
21786	1-1/2"	3.50"	4.03"	2.59"	2.63"	0.88"	1.13"	1.92"	2.13"	0.63"	75
21787	2"	4.53"	6.31"	3.38"	3.81"	1.44"	1.63"	2.39"	2.69"	0.75"	20

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Aluminum Service Entrance Cap - Clamp On



- Clamp-on type head used with Rigid conduit, IMC or E.M.T. for pulling service drop conductors
- Cast Aluminum
- Bar type Clamp
- Heavy pressure clamp in body
- Weather resistant


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15520	1/2"	2.68"	2.50"	2.19"	-	100
15521	3/4"	3.04"	2.76"	2.39"	-	100
15522	1"	3.48"	2.96"	2.58"	-	100
15523	1-1/4"	4.22"	3.27"	3.06"	-	60
15524	1-1/2"	5.22"	4.28"	3.49"	-	60
15525	2"	6.68"	5.81"	4.33"	-	30
15526	2-1/2"	9.94"	7.05"	6.54"	1	4
15527	3"	11.69"	8.54"	6.93"	1	4
15528	3-1/2"	11.69"	8.54"	7.28"	1	4
15529	4"	11.69"	8.54"	7.86"	1	4



Aluminum Service Entrance Cap - Conduit Mount Threaded

- Conduit Mount Head used with Rigid or IMC for Pulling Service Entrance Conductors
- Weather Resistant


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15530	1/2"	1.97"	2.68"	2.29"	-	100
15531	3/4"	2.13"	3.04"	2.66"	-	100
15532	1"	2.36"	3.48"	2.96"	-	100
15533	1-1/4"	2.68"	4.22"	3.11"	-	60
15534	1-1/2"	3.39"	5.22"	4.06"	-	60
15535	2"	4.33"	6.69"	5.28"	-	30
15536	2-1/2"	6.30"	9.94"	6.69"	1	4
15537	3"	7.99"	11.69"	8.08"	1	4
15538	3-1/2"	7.99"	11.69"	8.08"	1	4
15539	4"	7.99"	11.69"	8.08"	1	4



Aluminum Service Entrance Cap - Slip Fitter Mast Head

- Slip Fitter Mast Head used with Rigid or IMC Conduit for Pulling Service Drop conductors
- Cast Aluminum
- Mast type Clamp
- Weather Resistant

CAT. NO.	CONDUIT SIZE	INSULATOR CAP SIZE	DIMENSIONS			SET SCREW	BOX QTY
			A	B	C		
15540	2"	1-1/4"	3.46"	1.95"	3.75"	1/4"-20 X 5/8"	50
15541	2-1/2"	1-1/4"	3.46"	1.95"	3.75"	1/4"-20 X 1/2"	50
15542	2-1/2"	2"	4.68"	1.95"	4.88"	1/4"-20 X 5/8"	50






Malleable Mast Support Clamp



- Used to secure Service Entrance Conduit to the Outside surface of a building
- Hinged on one side and bolted on other side for easy installation
- Machined Lag Bolt
- Malleable Iron

CAT. NO.	CONDUIT SIZE	DIMENSIONS		BOX QTY
		A	B	
21830	2"	2.48"	0.41"	25
21831	2-1/2"	3.08"	0.44"	25

Conduit Support Split Ring

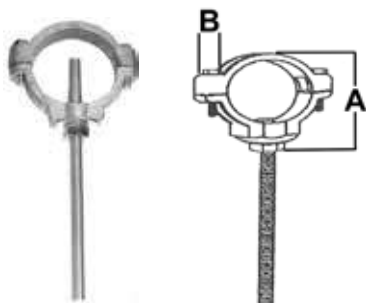

- Used to secure Service Entrance Conduit to the Outside surface of a building
- Bolted on both sides
- Malleable Iron

CAT. NO.	CONDUIT SIZE	BOLT SIZE	DIMENSIONS		BOX QTY
			A	B	
21835	2"	1/2" X 10"	2.70"	0.99"	25
21836	2-1/2"	1/2" X 10"	3.33"	1.07"	25
21837	3"	5/8" X 13"	4.50"	1.04"	10
21838	3-1/2"	5/8" X 13"	5.13"	1.08"	10
21839	4"	5/8" X 13"	5.60"	1.08"	10


Conduit Support Universal



- Used to secure Service Entrance Conduit to the Outside surface of a building
- 1/2" x 10" Bolt
- Zinc Plated Steel

CAT. NO.	CONDUIT SIZE	DIMENSIONS		BOX QTY
		A	B	
21833	1-1/4" TO 3"	3.80"	10.00"	20

Malleable U-Bolt Pipe Clamps

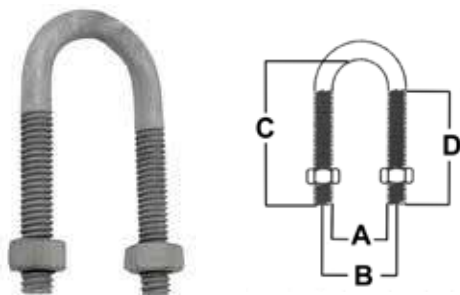


- Recommended for supporting or guiding heavy loads along runs of non-insulated pipe
- 2 hex nuts
- Malleable Iron - Galvanized

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
21840	1/2"	1.00"	1.25"	2.50"	1.81"	25	250
21841	3/4"	1.12"	1.38"	2.81"	1.81"	25	250
21842	1"	1.38"	1.63"	3.06"	1.81"	25	250
21843	1-1/4"	1.75"	2.00"	3.19"	1.81"	20	200
21844	1-1/2"	2.00"	2.38"	3.50"	1.81"	20	200
21845	2"	2.50"	2.50"	4.50"	2.63"	10	100
21846	2-1/2"	3.00"	3.25"	4.88"	2.63"	-	20
21847	3"	3.63"	3.88"	5.38"	2.63"	-	20
21848	3-1/2"	4.06"	4.56"	5.88"	2.63"	-	20
21849	4"	4.69"	5.06"	6.69"	2.63"	-	20

Lag Type Service Insulator Wire Holder

- Indoor or Outdoor use in Overhead Service Entrance
- These small porcelain insulators can also be used with all fence wire including high tensile, poly rope and poly tape
- 600V or Less

CAT. NO.	DUTY	SCREW SIZE	DIMENSIONS			BOX QTY
			A	B	C	
21892	LIGHT	1/4" X 1-11/16"	1.37"	1.98"	1.62"	100
21894	MEDIUM	3/8" X 2-1/4"	1.90"	2.90"	1.85"	50



Porcelain Wire Holders - Heavy Duty Reinforced

- Single-point wire holders are strong and compact
- Solid Rivet through head
- Made with Porcelain and Galvanized Steel
- Quick and easy installation for most projects
- For use with wooden construction

CAT. NO.	SCREW SIZE	DIMENSIONS			BOX QTY
		A	B	C	
21896	3/8" X 3" LAG	2.11"	2.90"	3.00"	50



Porcelain Wire Holders - Heavy Duty Adjustable

- Porcelain Wire holder has a steel reinforced saddle for use with pipe or pole attachment
- Adjustable Steel Clamp
- Fits 1-1/4" to 3" Conduit/Pipe

CAT. NO.	CONDUIT SIZE	DIMENSIONS			CLAMP MIN. DIA.	CLAMP MAX. DIA.	BOX QTY
		A	B	C			
21898	1-1/4" TO 3"	2.11"	2.90"	3.80"	1.62"	3.93"	20



Service Entrance Insulator Wire Holder - 2" Pipe Hanger

- Ceramic Service Entrance Wire Insulator with 2" Conduit/Pipe Hanger Clamp
- Fits 2" Rigid or EMT Conduit

CAT. NO.	CONDUIT SIZE	DIMENSIONS			BOX QTY
		A	B	C	
21897	2"	2.11"	2.90"	2.38"	25



Service Entrance Insulator Wire Holder - 3/8" X 5" Bolt


- Single-point wire holders are strong and compact
- Solid Rivet through head
- Made with Porcelain and Galvanized steel
- Bolt & Nut Type Wire Holder

CAT. NO.	BOLT SIZE	DIMENSIONS			BOX QTY
		A	B	C	
21899	3/8" X 5"	2.11"	2.90"	5.00"	25






Wedge Clamps

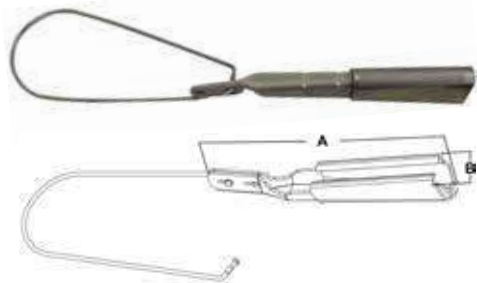

- Designed to hold triplex overhead service-entrance cable to a mounting structure
- Aluminum wedge and shell with a stainless-steel ball
- Can be used indoors or outdoors
- Corrosion resistant
- Installs quickly and easily

CAT. NO.	ACSR RANGE	DIMENSIONS		BOX QTY
		A	B	
28881	#6 - #2	5.94"	0.85"	50
28882	#4 - 1/0	7.21"	1.04"	25
28883	2/0 - 4/0	7.21"	1.22"	25


Wire Rope Clip - Guy Wire

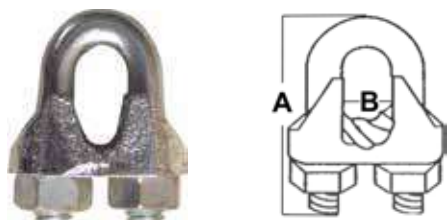

- For Guy Wire
- Malleable Iron
- Galvanized

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		A	B	
17302	1/4"	1.50"	0.25"	50


Steel Snap-In Blanks

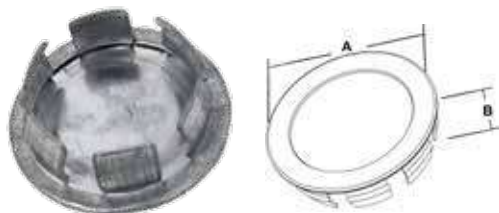

- For use in closing off unused openings in boxes or panel boards
- All steel construction provides installation integrity
- Snap-In Design

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
21800	1/2"	1.08"	0.29"	100	1,000
21801	3/4"	1.23"	0.31"	100	1,000
21802	1"	1.47"	0.34"	100	1,000
21803	1-1/4"	1.88"	0.37"	50	500
21804	1-1/2"	2.22"	0.31"	50	500
21805	2"	2.67"	0.34"	10	100

Type S With Screw and Bar Knockout Seals

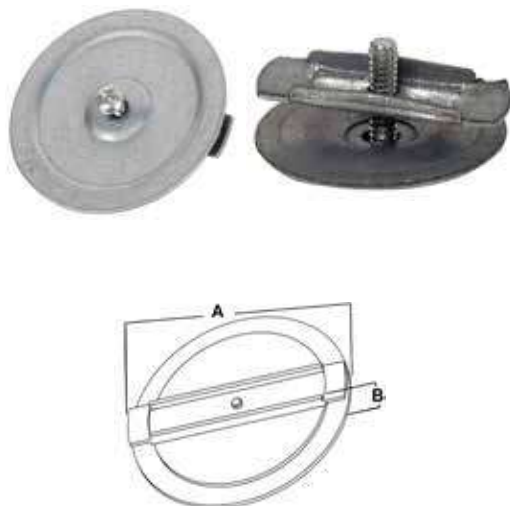

- Set screw/bar type knockout seals are inserted in open box knockouts to protect exposed wires
- Used in standard, air tight or dust tight applications
- Pre-assembled screw and backer bar slides on open knockout holes without removing box devices or covers
- Steel Galvanized

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
21790	1/2"	1.20"	0.27"	100	500
21791	3/4"	1.39"	0.32"	100	500
21792	1"	1.66"	0.28"	50	500
21793	1-1/4"	2.10"	0.33"	50	500
21794	1-1/2"	2.46"	0.33"	10	300
21795	2"	2.94"	0.34"	10	300
21796	2-1/2"	3.75"	0.34"	-	100
21797	3"	4.51"	0.34"	-	100
21798	3-1/2"	5.01"	0.34"	-	100
21799	4"	5.50"	0.34"	-	100

Plastic Knockout Plugs

- To cap knockout holes in box or enclosure


CAT. NO.	TRADE SIZE	MOUNTING HOLE DIAMETER	A	BAG QTY
21721	1/2"	0.85"	1-1/8"	100
21722	3/4"	1.10"	1-1/4"	100
21723	1"	1.35"	1-1/2"	50



Plastic Knockout Plugs - Snap-In

- Plugs electrical knockouts with finger tip pressure
- Snap-In Winged Protrusion for Positive Lock
- Low cost and assures good appearance
- Less costly & safer than steel snap-in blanks
- 1/8" maximum steel thickness
- Made from UL approved Nylon 6/6, 94V-2

CAT. NO.	MOUNTING HOLE DIAMETER	HEAD DIAMETER	OVERALL HEIGHT	BAG QTY
22380	0.18" (3/16")	0.25"	0.23"	10
22382	0.31" (5/16")	0.47"	0.31"	10
22384	0.37" (3/8")	0.51"	0.41"	10
22386	0.50" (1/2")	0.67"	0.41"	10
22388	0.63" (5/8")	0.78"	0.41"	10
22390	0.75" (3/4")	0.90"	0.41"	10
22392	0.87" (7/8") (1/2" TRADE)	0.98"	0.44"	10
22394	0.98" (1")	1.11"	0.44"	10
22396	1.18" (1-1/4")	1.35"	0.44"	10
22398	1.50" (1-1/2")	1.67"	0.44"	10
22400	1.75" (1-3/4")	1.93"	0.44"	10

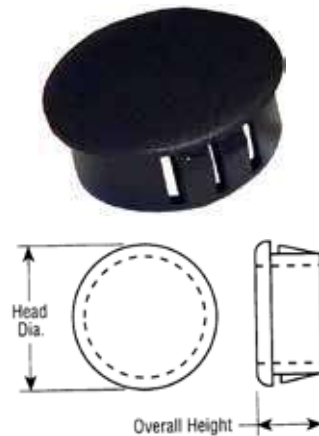

SIZES LISTED ARE ACTUAL DIAMETER
(NOT TRADE SIZES EXCEPT WHERE NOTED)

Plastic Pull Caps

- Used for capping EMT, IMC & Rigid Conduits and most bushings

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		A	B	
21712	1/2"	11/16"	5/8"	100
21713	3/4"	15/16"	13/16"	100
21714	1"	1-3/16"	1-1/16"	100
21715	1-1/4"	1-1/2"	1-3/8"	50
21716	1-1/2"	1-3/4"	1-9/16"	25
21717	2"	2-3/16"	2-1/16"	25





1 Hole EMT Pipe Straps - Steel



- Secures EMT Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- 3", 3-1/2" & 4" Fits EMT, Rigid or IMC conduit
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19400	1/2"	100	1000
19401	3/4"	100	1000
19402	1"	100	500
19403	1-1/4"	25	250
19404	1-1/2"	20	100
19405	2"	10	100
19431*	3"	-	10
19432*	3-1/2"	-	10
19433*	4"	-	10

*Suitable for EMT, Rigid or IMC conduit

2 Hole EMT Pipe Straps - Steel



- Secures EMT Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19412	1/2"	100	1,000
19413	3/4"	50	500
19414	1"	25	250
19415	1-1/4"	25	250
19416	1-1/2"	10	100
19417	2"	5	50

1 Hole Rigid Pipe Straps - Heavy Duty - Steel



- Secures Rigid & IMC Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- 3", 3-1/2", 4" Fits EMT, Rigid or IMC conduit
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19424	1/2"	100	1,000
19425	3/4"	50	500
19426	1"	25	250
19427	1-1/4"	25	250
19428	1-1/2"	20	200
19429	2"	10	100
19430	2-1/2"	5	50
19431*	3"	-	10
19432*	3-1/2"	-	10
19433*	4"	-	10
19434**	5"	-	10
19435**	6"	-	10

* Suitable for EMT, Rigid or IMC conduit

**Not UL listed

2 Hole Rigid Pipe Straps - Steel



- Secures Rigid & IMC Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19436	1/2"	100	1,000
19437	3/4"	50	500
19438	1"	25	250
19439	1-1/4"	20	200
19440	1-1/2"	10	100
19441	2"	5	50
19442	2-1/2"	-	50
19443	3"	-	50
19444	4"	-	10
19445*	5"	-	10
19446*	6"	-	10

*Not UL listed

1-888-777-6678

1 Hole Rigid Pipe Straps - Malleable Iron

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
19522	1/2"	2.25"	0.66"	0.94"	0.35"	100	1,000
19523	3/4"	2.26"	0.75"	1.22"	0.49"	50	500
19524	1"	3.06"	0.81"	1.50"	0.63"	25	250
19525	1-1/4"	3.69"	0.88"	1.88"	0.82"	20	200
19526	1-1/2"	4.00"	1.00"	2.06"	0.91"	10	100
19527	2"	5.06"	1.13"	2.56"	1.16"	-	25
19528	2-1/2"	6.10"	1.60"	3.30"	1.38"	-	25
19529	3"	7.28"	1.46"	3.70"	1.71"	-	25
19531	4"	8.86"	2.08"	4.85"	2.23"	-	10
19532	5"	9.38"	2.59"	6.00"	2.88"	-	2
19533	6"	10.38"	3.13"	7.00"	3.38"	-	2




- Secures Rigid & IMC Conduit
- Malleable Iron, Heavy Duty Casting
- Reinforced Rib for Extra Strength
- Snap-On Installation
- Zinc Plated

- Provides Space between conduit and mounting surface
- For use with malleable iron or aluminum straps
- Can be used with one hole straps
- Heavy Duty Casting

Malleable EMT/Rigid Clamp Back Spacers

CAT. NO.	TRADE SIZE	DIMENSIONS							INNER BOX	OUTER BOX
		A	B	C	D	E	F	G		
14782	1/2"	2.06"	1.00"	0.50"	0.43"	0.32"	0.40"	0.08"	25	250
14783	3/4"	2.38"	1.06"	0.50"	0.53"	0.32"	0.40"	0.08"	25	250
14784	1"	2.94"	1.25"	0.56"	0.67"	0.32"	0.40"	0.08"	25	250
14785	1-1/4"	3.50"	1.38"	0.75"	0.84"	0.32"	0.40"	0.08"	10	100
14786	1-1/2"	3.81"	1.44"	0.81"	0.96"	0.32"	0.40"	0.08"	10	100
14787	2"	4.75"	1.94"	1.00"	1.20"	0.32"	0.40"	0.08"	5	50
14788	2-1/2"	5.75"	2.44"	0.75"	1.45"	0.32"	0.40"	0.08"	-	25
14789	3"	6.69"	2.63"	0.088"	1.77"	0.32"	0.40"	0.08"	-	10
14790	3-1/2"	7.13"	2.88"	1.08"	2.02"	0.32"	0.40"	0.08"	-	10
14791	4"	8.88"	3.06"	1.06"	2.27"	0.32"	0.40"	0.08"	-	10
14792	5"	10.13"	3.75"	0.06"	2.81"	0.32"	0.40"	0.08"	-	10
14793	6"	12.19"	4.00"	0.75"	3.35"	0.32"	0.40"	0.08"	-	10

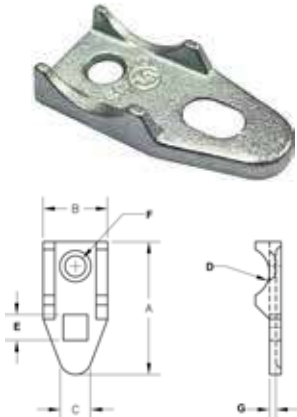

Conduit Hanger with Bolt

CAT. NO.	TRADE SIZE	CONDUIT TYPE & SIZE	OUTER BOX
19470	1/2"	EMT & RIGID	100
19471	3/4"	EMT & RIGID	100
19472	1"	EMT & RIGID	100
19473	1-1/4"	EMT	100
19474	1-1/4" 1-1/2"	1-1/2" EMT 1-1/4" RIGID	100
19475	1-1/2"	1-1/2" RIGID	100
19476	2"	EMT & RIGID	50
19477	2-1/2"	EMT & RIGID	25
19478	3"	EMT & RIGID	25
19479	3-1/2"	EMT & RIGID	25
19480	4"	EMT & RIGID	25



- Secures EMT or Rigid Conduit to any mounting surface, Threaded Rod or Insulated Supports
- Zinc Plated Steel



Non Metallic Cable One Hole Strap



- Used To Secure 14/2 NM Romex Cables
- Zinc Plated Steel
- Reinforced Rib for Extra Strength

CAT. NO.	CABLE SIZE	INNER BOX	OUTER BOX
19460	14/2	100	1000

BX 1 Hole Strap



- These one-hole pipe straps are ideal for hanging tubing, pipe, conduit and BX cable
- Pre-galvanized zinc plated steel



CAT. NO.	CABLE SIZE	BOX QTY
19463*	BX: 14 - 2 THRU 10 - 3	100
19464	EMT: 1/2", RIGID: 1/4", BX: 12 - 3, 10 - 2, 10 - 3 SER 8	100

*Not UL listed

- Secures SE & SEU Service Entrance Cable
- Zinc Plated Steel

CAT. NO.	CABLE SIZE	INNER BOX	OUTER BOX
19452	(3)#8, (3)#6 OR (3)#4	100	1,000
19453	(3)#3 OR (3)#2	100	1,000
19454	(3)#1, (3)#1/0, (3)#2/0	50	500
19455	(3)#3/0, (3)#4/0	50	500

1 Hole SEU Pipe Straps



2 Hole SEU Pipe Straps



- Secures SE & SEU Service Entrance Cable
- Zinc Plated Steel

CAT. NO.	CABLE SIZE	INNER BOX	OUTER BOX
19456	(3)#8 OR (3)#6, (3)#4	100	1,000
19457	(3)#2 OR (3)#3	100	1,000
19458	(3)#1, (3)#1/0 OR (3)#2/0	50	500
19459	(3)#3/0, (3)#4/0	25	250

2 Hole PVC Pipe Straps



- For Schedule 40 & 80 PVC Conduit
- Heavy Duty Polyethylene resists deterioration from UV rays and breakage from extreme cold



CAT. NO.	TRADE SIZE	BOX QTY
19490	1/2"	100
19492	3/4"	100
19494	1"	100
19496	1-1/4"	50
19498	1-1/2"	50
19500	2"	50
19501	2-1/2"	25
19502	3"	25
19503	4"	25

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678

Channel Nut - No Spring

- For all channel sizes
- 17404 can not be used with 13/16" & 1" channel
- Zinc Electroplate Finish



CAT. NO.	THREAD	THICKNESS	BOX QTY
17400	1/4"-20	0.25"	100
17402	3/8"-16	0.37"	100
17404	1/2"-13	0.50"	100

Channel Nut - Short Spring

- For 13/16" & 1" channel
- Zinc Electroplate Finish



CAT. NO.	THREAD	THICKNESS	BOX QTY
17412	1/4"-20	0.25"	100
17420	3/8"-16	0.37"	100

Channel Nut Regular Spring

- For 1-3/8" & 1-5/8" channel
- Zinc Electroplate Finish


CAT. NO.	THREAD	THICKNESS	BOX QTY
17430	1/4"-20	0.25"	100
17438	3/8"-16	0.37"	100
17442	1/2"-13	0.50"	100



Post Base Single Channel 2 Hole Standard Strut 1-5/8"

- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel
- 2 Mounting Holes
- 4" X 6" Base


CAT. NO.	BOX QTY
17450	5



Post Base Single Channel 4 Hole Standard Strut 1-5/8"

- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel
- 4 Mounting Holes
- Corner Orientation
- 6" X 6" Base


CAT. NO.	BOX QTY
17452	5



Post Base Single Channel 4 Hole Square Strut 1-5/8"

- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel
- 4 Mounting Holes
- Side Orientation
- 6" X 6" Base


CAT. NO.	BOX QTY
17454	5





STEEL HAS ZINC ELECTROPLATE FINISH, 1-5/8" WIDE X 1/4" THICK. HOLES ARE 9/16" DIAMETER, 13/16" CENTER TO EDGE ON 1-7/16" CENTERS

Square Washer



CAT. NO.	BOLT SIZE	HOLE SIZE	BOX QTY
17612	1/4"	5/16"	100
17616	3/8"	7/16"	100
17618	1/2"	9/16"	100

2 Hole Splice Plate




CAT. NO.	BOX QTY
17622	50

3 Hole Splice Plate




CAT. NO.	BOX QTY
17624	25

4 Hole Splice Plate




CAT. NO.	BOX QTY
17626	25

4 Hole Tee Plate




CAT. NO.	BOX QTY
17636	20

3 Hole Corner Plate




CAT. NO.	BOX QTY
17632	25

2 Hole Cross Corner Angle

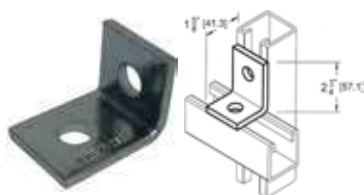

CAT. NO.	BOX QTY
17630	50

2 Hole Corner Angle

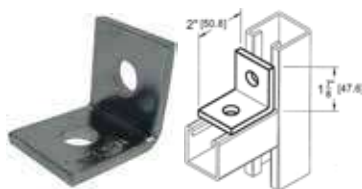


CAT. NO.	BOX QTY
17628	50

4 Hole 3 Way Corner Angle




CAT. NO.	BOX QTY
17634	25

3 Hole Cross Corner Angle




CAT. NO.	BOX QTY
17633	50

2 Hole Open Corner Angle



CAT. NO.	BOX QTY
17638	50

Plastic White End Caps




CAT. NO.	CHANNEL USED WITH	BOX QTY
17682	13/16"	100
17684	1-5/8"	100

Rigid Strut Clamp

- Secures Rigid/IMC Conduit To Strut
- Zinc Electroplate Finish


CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD	BOX QTY
17514	1/2"	0.840"	400	100
17515	3/4"	1.050"	600	100
17516	1"	1.315"	600	100
17517	1-1/4"	1.660"	600	50
17518	1-1/2"	1.900"	800	50
17519	2"	2.375"	800	50
17520	2-1/2"	2.875"	800	50
17521	3"	3.500"	800	25
17522	3-1/2"	4.000"	1000	25
17523	4"	4.500"	1000	25
17524	5"	5.562"	1000	25
17525	6"	6.625"	1000	25
17526	8"	8.625"	1000	25



Universal Strut Clamp

- Secures Rigid/IMC & EMT Conduit To Strut
- Zinc Electroplate Finish


CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17532	1/2"	0.773"	400	100
17533	3/4"	0.986"	600	100
17534	1"	1.239"	600	100
17535	1-1/4"	1.585"	600	50
17536	1-1/2"	1.820"	800	50
17537	2"	2.286"	800	50



EMT Strut Clamp

- Secures EMT Conduit To Strut
- Zinc Electroplate Finish


CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17542	1/2"	0.706"	400	100
17543	3/4"	0.922"	400	100
17544	1"	1.163"	600	100
17545	1-1/4"	1.510"	600	50
17546	1-1/2"	1.740"	800	50
17547	2"	2.197"	800	50



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Malleable Right Angle Pipe Clamp

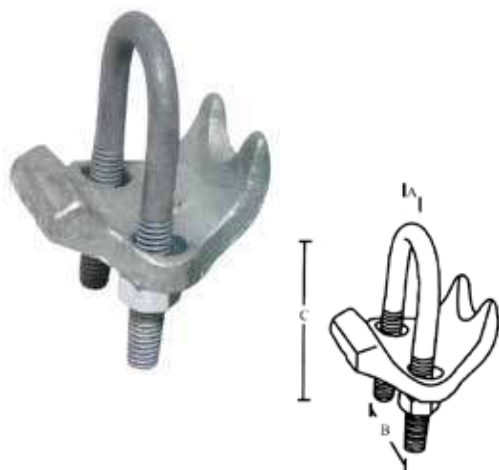

- Right Angle 90° Conduit Support Secures Rigid, IMC or EMT Perpendicular to Steel Beam, Strut Channel or Angle Supports
- Electro Zinc Plated
- Malleable Iron Cradle
- Steel Galvanized Bolt/Hex Nuts

CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
21850	3/8"	0.820"	1.00"	1.12"	50
21851	1/2"	1.00"	1.25"	2.50"	50
21852	3/4"	1.125"	1.125"	2.81"	50
21853	1"	1.375"	1.375"	3.06"	50
21854	1-1/4"	1.75"	1.75"	3.19"	50
21855	1-1/2"	2.00"	2.375"	3.50"	50
21856	2"	2.50"	2.50"	4.50"	50
21857	2-1/2"	3.00"	3.00"	4.875"	25

Malleable Parallel Pipe Clamp



- Parallel Conduit Support Secures Rigid, IMC or EMT Parallel to Steel Beam, Strut Channel or Angle Supports
- Electro Zinc Plated
- Malleable Iron Cradle
- Steel Galvanized Bolt/Hex Nuts

CAT. NO.	TRADE SIZE	DIMENSIONS		OUTER BOX
		A	B	
21861	1/2"	2.00"	1.37"	50
21862	3/4"	2.88"	1.44"	50
21863	1"	3.06"	1.69"	50
21864	1-1/4"	3.63"	2.125"	25
21865	1-1/2"	3.88"	2.19"	25
21866	2"	4.63"	2.88"	25
21868	3"	5.88"	3.88"	10
21870	4"	6.81"	4.81"	10

Malleable Edge Pipe Clamp



- Edge Conduit Clamp Secures Rigid, IMC or EMT Perpendicular to edge of Steel Beam, Strut Channel or Angle Supports
- Electro Zinc Plated
- Malleable Iron Cradle
- Steel Galvanized Bolt/Hex Nuts


CAT. NO.	TRADE SIZE	DIMENSIONS		OUTER BOX
		A	B	
21871	1/2"	2.81"	2.13"	50
21872	3/4"	2.94"	2.38"	50
21873	1"	3.06"	2.63"	25
21875	1-1/2"	3.94"	3.25"	25
21876	2"	4.50"	4.06"	25
21878	3"	5.75"	5.25"	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Strut to Beam Clamp with Square U-Bolt

- Design load 1,200 lbs. when used in pairs
- Zinc Electroplate Finish


CAT. NO.	DESCRIPTION	BOX QTY
17462	BEAM CLAMP FOR 13/16" & 1-5/8" CHANNEL	25

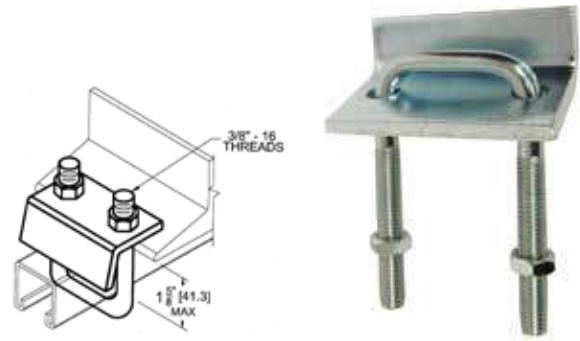

Strut to Beam Clamp with Square U-Bolt

- Design load 1,200 lbs. when used in pairs
- Zinc Electroplate Finish

CAT. NO.	DESCRIPTION	BOX QTY
17464	BEAM CLAMP FOR 2-7/16" & 3-1/4" CHANNEL	25

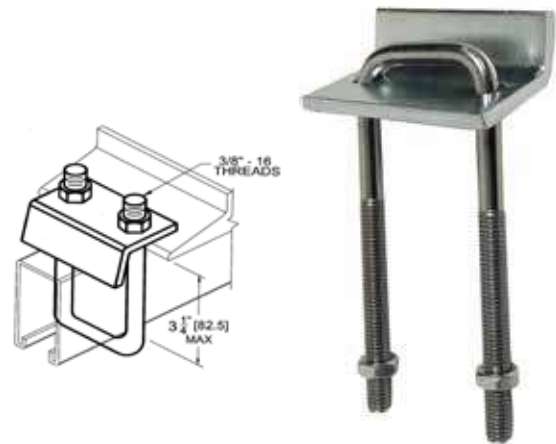

Strut Fitting Torque Values

- The following are the torque values used for determining the load ratings of fittings when attached to channel framing as specified in the Metal Framing Manufacturers Association (MFMA) Standard #2

THREAD SIZE	TORQUE		
	IN. LB.	FT. LB.	NM
1/4"	72	6	8.1
3/8"	228	19	25.8
1/2"	600	50	67.8

Beam Clamp Torque Values


- For beam clamps or other applications the following torque values from Manufacturer's Standardization Society (MSS) SP-69 are recommended unless otherwise specified

THREAD SIZE	TORQUE		
	IN. LB.	FT. LB.	NM
1/4"	40	3.3	4.5
3/8"	60	5.0	6.8
1/2"	125	10.4	14.1

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Beam Clamps Universal

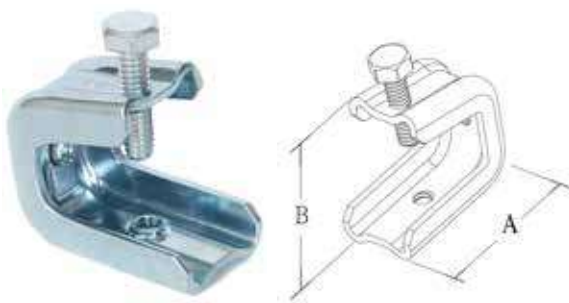


- Used with Conduit Hangers, Bridle Rings and Threaded Rod
- Tapped for Rods - bottom and back
- Case Hardened Steel Set Screw tapped at an angle - locks on beam
- Zinc Plated Steel

CAT. NO.	FITS FLANGE	BOTTOM & BACK THREADS	STATIC LOAD LIMIT BOTTOM HOLE ONLY	SCREW DIMENSIONS	DIMENSIONS		INNER BOX	MASTER BOX
					A	B		
17468	1/2"	1/4" - 20	75 LBS	1/4" - 20 X 1"	1.69"	1.66"	25	250
18111*	1/2"	10 - 24	75 LBS	1/4" - 20 X 1"	1.65"	1.40"	-	50
17469	3/4"	3/8" - 16	200 LBS	5/16" - 18 X 1-3/8"	2.15"	2.01"	-	50

*Not UL Listed


Malleable Iron Universal Beam Clamp



- Maximum Flange Thickness of 5/8"
- The threaded hole on the back side of the clamp is not load rated
- Zinc Electroplate Finish

CAT. NO.	ROD SIZE (RS)	MAX LOAD (W1)	MAX LOAD (W2)	BOX QTY
17486	1/4" - 20	100 LBS.	250 LBS.	100

Malleable Iron Rod Support Beam Clamp



- Used with Conduit Hangers, Bridle Rings & Drop Rods. 1/4" to 1/2"
- Tapped for Rods - bottom and back on all sizes
- Malleable Iron - Zinc plated

CAT. NO.	JAW OPENING	ROD SIZE (RS)	SET SCREW SIZE	MAX LOAD (W)	DIMENSIONS			BOX QTY
					B	L	H	
17472	3/4"	1/4" - 20	5/16" - 18	125 LBS.	1.18"	1.38"	1.38"	50
17474	7/8"	3/8" - 16	1/2" - 13	300 LBS.	2.00"	1.87"	1.75"	50
17476	1-1/8"	1/2" - 13	1/2" - 13	750 LBS.	2.50"	2.37"	2.14"	25

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678

Plastic Cable Clips

- Impact resistant, non-corrosive
- Complete with corrosion resistant, hardened steel nails for securing cable to wood, cement, plaster, brick, etc.
- Nail heads are recessed for minimum exposure
- Smooth saddle prevents damage to insulation
- High-grade injection-molded polyethylene
- Resists rot, rust and the effects of temperature extremes



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	FIG.	USED FOR WIRE SIZES	COLOR	W X HT X INSIDE HT	INNER BAG	MASTER BAG
35000	1	2 NAIL 12/2 & 14/2 NM & UF (1/2" WIDE)	WHITE	0.49" X 0.31" X 0.21"	100	1,000
35001	1	2 NAIL 10/2 NM & UF (3/4" WIDE)	WHITE	0.74" X 0.31" X 0.21"	100	1,000
35002	2	12/2 & 14/2 NM & UF	WHITE	0.39" X 0.39" X 0.26"	100	1,000
35004	3	14/3 NM	GRAY	0.31" X 0.51" X 0.32"	100	1,000
35006	3	10/3 & 12/3 NM	GRAY	0.43" X 0.65" X 0.48"	100	1,000
35008	3	RG 59 COAX CABLE, CAT 5 UTP 4 PAIR	GRAY	0.24" X 0.35" X 0.26"	100	1,000
35040	3	RG 59 COAX CABLE, CAT 5 UTP 4 PAIR	WHITE	0.24" X 0.35" X 0.26"	100	1,000
35041	3	RG 59 COAX CABLE, CAT 5 UTP 4 PAIR	BLACK	0.24" X 0.35" X 0.26"	100	1,000
35010	3	RG 6 COAX CABLE	GRAY	0.28" X 0.43" X 0.30"	100	1,000
35042	3	RG 6 COAX CABLE	WHITE	0.28" X 0.43" X 0.30"	100	1,000
35043	3	RG 6 COAX CABLE	BLACK	0.28" X 0.43" X 0.30"	100	1,000
35012	3	4 CONDUCTOR TELEPHONE WIRE	GRAY	0.14" X 0.23" X 0.15"	100	1,000
35044	3	4 CONDUCTOR TELEPHONE WIRE	WHITE	0.14" X 0.23" X 0.15"	100	1,000
35045	3	4 CONDUCTOR TELEPHONE WIRE	BLACK	0.14" X 0.23" X 0.15"	100	1,000
35014	2	SMALL CORDS SUCH AS LAMP, THERMOSTAT, SPEAKER & PHONE	WHITE	0.24" X 0.25" X 0.15"	100	1,000

- Plastic insulated staples quickly and easily secure vertical stacks of non-metallic cable
- Electro-zinc plated nails provide strength and durability
- Smooth saddles prevent damage to insulation
- UV-protected Polyethylene saddle
- 1/2" wide, white color

CAT. NO.	CABLE SIZE	INNER BAG	OUTER BAG
35016	(2) 14/2 & 12/2	50	500
35018	(3) 14/2 & 12/2	50	500
35020	(4) 14/2 & 12/2	50	500



Plastic Stacking Staples

Plastic Service Entrance Cable Straps

- Plastic insulated straps quickly and easily secure service entrance cable
- Electro-zinc plated nails provide strength and durability
- Stabilized against UV rays and extreme cold; withstand deterioration and breakage
- Smooth saddles prevent damage to insulation
- Polyethylene Material

CAT. NO.	FIG.	CABLE SIZE	INNER BAG	OUTER BAG
35022	1	#6 & #8 SEU	50	500
35024	1	#2 SEU	25	250
35026	1	4/O SEU	25	250
35028	2	#6 SER & 1/2" EMT	50	500
35030	2	#2 SER & 3/4" EMT	25	250
35032	2	2/O SER	25	250
35034	2	4/O SER	25	250



FIG. 1



FIG. 2




Staples



- Non-Insulated
- Made of Steel
- Used for Armored & NM Cable
- Sharp Tips

CAT. NO.	CABLE RANGE & TYPES	DIMENSIONS		BOX QTY	CASE QTY
		WIDTH	DEPTH		
19556	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	100	2,000
19555	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	500	5,000
19554	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	-	5,000/PAIL
19553	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	100	2,000
19552	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	500	5,000
19551	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	-	5,000/PAIL

Cable Stacker



- Accepts a wide range of NM cables
- Angled nail allows easy installation from any direction regardless of stud positioning and spacing
- Cables snap easily in between tines for a secure hold
- Also used with CATV, Telephone, Instrumentation and Security Cables
- Material: Polypropylene

CAT. NO.	DIMENSIONS								BAG QTY	CASE QTY
	A	B	C	D	E	F	G	H		
21757	0.47"	0.11"	1.93"	1.72"	0.78"	0.26"	1.67"	3.26"	25	1,000


Nail Straps - Heavy Duty - Rigid IMC & EMT



- Secures Rigid, IMC & EMT Conduits thru 1" Diameter
- Zinc Plated Stamped Steel
- Wood or Masonry Applications

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
19482	1/2"	2.13"	1.10"	100	1,000
19483	3/4"	2.13"	1.20"	100	1,000
19484	1"	2.25"	1.50"	50	500

Nail Plates




- Used to protect internal wire runs from nail punctures
- Hammer On
- Zinc Plated Stamped Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
19542	1-1/2" X 2-1/2"	2.5"	1.5"	100	500
19543	1-1/2" X 6"	6"	1.5"	-	100

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

DiversiTech PRODUCTS



GFCI AND USB WIRING DEVICES



NEW GFCIs
IVORY, WHITE & LIGHT ALMOND
UL Listed
Compact Design



USB WALL OUTLETS
Type A and C
30 WATTS

ELECTRICAL BOXES

Get everything you need from
SmarToggle old-work plastic boxes
to weatherproof covers.



INSULATED CONNECTORS

Now Service Entrance Rated

CONNECTORS & GROUNDING



WIRE MANAGEMENT



CONNECTORS



WIRING DEVICES



FITTINGS



MORRIS PRODUCTS INC.
53 CAREY ROAD
QUEENSBURY, NY 12804
INFO@MORRISPRODUCTS.COM
1.888.777.6678



MORRISPRODUCTS.COM

JUN 2026 / CAT#00024

YOU NEED IT

WE'VE GOT IT