



*SINGLE SOURCE...
ELECTRICAL & LIGHTING*

DIVERSITECH CATALOG

*Featuring Select Diversitech,
Packard & Morris Products
for the HVAC Market*

MORRISPRODUCTS.COM



MORRIS PRODUCTS

is a wholly owned subsidiary of Diversitech Corporation, a leading manufacturer of supplies and components for the heating, ventilation, air conditioning and refrigeration (HVAC/R) industry.

As the HVAC/R and Electrical industries continue to converge, Morris Products brings the most popular Diversitech offerings in supplies for the HVAC/R industry to the market. The wide range of products in this catalog represents those Diversitech products stocked and ready for shipment from Morris' vast warehouses. Don't see what you need? Any Diversitech item found on diversitech.com can be purchased through Morris Products.

Need help choosing the right product for your HVAC/R or Motor Shop application? Reach out to Techs Helping Techs for Technical Support from Drew and Chris for questions on Diversitech products.*

**SINGLE SOURCE...
ELECTRICAL & LIGHTING**

TECHS HELPING TECHS



1-800-995-2222



DREW PINO



CHRIS BAXTER

You have enough to worry about, so we are here to help. Our highly experienced technical support staff are standing by to assist you with any questions about our products

✉ techsupport@diversitech.com

*For Technical Support on Morris Products. Contact techsupport@morrisproducts.com

CONNECTORS 	GROUNDING 	TAPE 	WIRE MANAGEMENT 	FITTINGS
PLASTIC BOXES 	METAL BOXES 	MOUNTING 	HVAC 	MOTORS & CONTROLS
CEMENTS / FLASHINGS 	TOOLS 	WIRING DEVICES 	LIGHTING 	EXIT / EMERGENCY

PICTORAL INDEX

PAGE#

CATEGORY



1

**Equipment
Mounting**



6

**Condensate
Management**



8

Electrical



77

Tools



83

**Components &
Consumables**



97

**Thermostats &
Controls**

NEW E Lite® Pads - 3"

USED WHERE CODES HAVE MOVED TOWARD
REQUIRING 3" PADS, CHECK LOCAL CODES FOR
YOUR REQUIREMENTS.



- E Lite® is made from plastic (polypropylene), resulting in a pad that is lightweight and durable
- Engineered with uniform and generous ribbing for level loading, optimum strength and self-leveling ground support
- Unaffected by UV exposure or extreme weather
- Environmentally friendly, made from 98% recycled plastic
- A subtle texture on pad surface prevents unit slide
- Each pad is constructed with its size in raised letters on the side of the pad for easy identification
- Tested per ASTM D2299 with refrigerants, synthetic canine urine, compressor oil or salt solution.
- Drillable making it easy to secure equipment to the pad if necessary
- Made in the USA 

CAT. NO.	SIZE	PAD WEIGHT	CASE QTY
ELI838-3	18" X 38"	9	1

Rubber/Cork Anti-Vibration Pad



- Highest quality elastomeric oil resistant padding.
- Designed to withstand 50 psi.
- Rubber pads are corrugated on both sides.
- Cork is laminated between two corrugated pads.
- Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.

CAT. NO.	DESCRIPTION	CASE QTY
MP-2C	2" X 2" X 7/8" RUBBER/CORK	1
MP-3C	3" X 3" X 7/8" RUBBER/CORK	1
MP-4C	4" X 4" X 7/8" RUBBER/CORK	1
MP-6C	6" X 6" X 7/8" RUBBER/CORK	1

E.V.A. Anti-Vibration Pad



The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1

- Special composite foam center which is much more structurally sound than cork.
- Not affected by oils or chemicals that can break down cork
- More effective at vibration dampening than solid rubber.
- Designed to withstand 50 PSI.

CAT. NO.	DESCRIPTION	CASE QTY
MP-2E	2" X 2" X 7/8" E.V.A. PAD	1
MP-3E	3" X 3" X 7/8" E.V.A. PAD	1
MP-4E	4" X 4" X 7/8" E.V.A. PAD	1
MP-6E	6" X 6" X 7/8" E.V.A. PAD	1

Furnace Mounting Block

- Mounting block can support 40% more weight than competitive products - over 500 pounds
- Easy peel and stick installation.



CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
FB-1	FURNACE MOUNTING BLOCK	72	72



One Piece Heat Pump Risers

- Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers
- The one piece, heavy duty plastic unit is manufactured in three heights
- Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise
- Mounting block can support 40% more weight than competitive products - over 500 pounds
- Easy peel and stick installation

CAT. NO.	DESCRIPTION	BOX QTY
HPR-3	RISER - 3"	48
HPR-6	RISER - 6"	36
HPR-12	RISER - 12"	16

Equipment Wall Mounting Brackets

- Width adjustable from 0" to 34" - 25" Shelf Depth
- Pre-Slotted for quick Connection to unit
- 6 Points of anti-vibration isolation
- Engineered to reduce assembly by 50%
- Heavy Ga. Steel
- All necessary hardware included
- Hurricane Certified



CAT. NO.	MAX CAPACITY	STEEL GAUGE	CASE QTY
QSWB2000	350 LB	14	1
QSWB4000	500 LB	11	1

Hef-T-Foot™

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or an alternative to supporting condensing units, air source heat pumps or a variety of outdoor equipment.



FF-250-S



FF-250-UNI

- Manufactured from heavy duty recycled rubber
- Complete with .8" x 1.6" galvanized steel strut adhered to the rubber with industrial adhesive.
- Strong and durable rubber with drain slots moulded into the underside to allow standing water to flow under the foot.

CAT. NO.	DESCRIPTION	CASE QTY
FF-250-S	9.8" WITH 1.6" X 0.8" STRUT	1
FF-450-S	17.7" WITH 1.6" X 0.8" STRUT	1
FF-600-S	23.6" WITH 1.6" X 0.8" STRUT	1
FF-250-UNI	9.8" UNIVERSAL	1

Equipment Mounting HVAC MINI-Split Stands

- Fits all mini split brands on the market
- 6" x 6" w/ 3/8" slotted feet
- Adjustable in height up to 1.25"
- 50 derometer pads on each foot
- 4 points of anti-vibration isolation washers
- Adjustable footprint from 34" to 40" in 1" increments



CAT. NO.	SIZE	MAX CAPACITY	STEEL GAUGE	CASE QTY
QSMS120I	12"	400 LB	14	25
QSMS180I	18"	400LB	14	25
QSMS240I	24"	400LB	14	25

Equipment Ceiling Mounting Brackets

- Mounts parallel or across joists at 16" or 24" on center
- Allows for 360° unit rotation
- Direct flow of heat for maximum efficiency
- Safely locks into place after installation
- Includes all necessary hardware



CAT. NO.	MAX CAPACITY	STEEL GA	CASE QTY
QSW13000	200 LB	14	1

EMT Strut Clamp



- Secures EMT Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17542	1/2"	0.706"	400	100
17543	3/4"	0.922"	400	100
17544	1"	1.163"	600	100
17545	1-1/4"	1.510"	600	50
17546	1-1/2"	1.740"	800	50
17547	2"	2.197"	800	50

Rigid Strut Clamp



- Secures Rigid/IMC Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17514	1/2"	0.840"	400	100
17515	3/4"	1.050"	600	100
17516	1"	1.315"	600	100
17517	1-1/4"	1.660"	600	50
17518	1-1/2"	1.900"	800	50
17519	2"	2.375"	800	50

Universal Strut Clamp



- Secures Rigid/IMC & EMT Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17532	1/2"	0.773"	400	100
17533	3/4"	0.986"	600	100
17534	1"	1.239"	600	100
17535	1-1/4"	1.585"	600	50
17536	1-1/2"	1.820"	800	50
17537	2"	2.286"	800	50
17520	2-1/2"	2.875"	800	50
17521	3"	3.500"	800	25
17522	3-1/2"	4.000"	1000	25
17523	4"	4.500"	1000	25
17524	5"	5.562"	1000	25
17525	6"	6.625"	1000	25
17526	8"	8.625"	1000	25

Post Base Single Channel for 1-5/8" Strut



- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel

CAT. NO.	BASE	MOUNTING HOLES	BOX QTY
17450	4"X6"	2	5
17452	6"X6"	4	5
17454	6"X6"	4	5

Channel Nut Regular Spring



- For 1-3/8" & 1-5/8" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17430	1/4" - 20	0.25"	100
17438	3/8" - 16	0.37"	100
17442	1/2" - 13	0.50"	100

Channel Nut - Short Spring



- For 13/16" & 1" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17412	1/4" - 20	0.25"	100
17420	3/8" - 16	0.37"	100

Strut to Beam Clamp with Square U-Bolt



- Design load 1,200 lbs. when used in pairs
- Zinc Electroplate Finish

CAT. NO.	DESCRIPTION	BOX QTY
17462	FOR 13/16" & 1-5/8" CHANNEL	25
17464	FOR 2-7/16" & 3-1/4" CHANNEL	25

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT: WWW.MORRISPRODUCTS.COM

3 Hole Corner Plate

CAT. NO.	BOX QTY
17632	25



2 Hole Cross Corner Angle

CAT. NO.	BOX QTY
17630	50



2 Hole Open Corner Angle

CAT. NO.	BOX QTY
17638	50



Spring Steel Cable Clips



- Cable Clip for 14/2 Thru 12/2 MC, AC, or BX
- Supports cable from #12 to #8 wire in horizontal or vertical position
- OD's from 0.433" to 0.535"
- NOTE: These products are designed for positioning only
- No load rating



CABLE SIZE	BOX QTY
18026	100

Beam Clamps

- Fast installation; fits beam flange up to 1/2"
- Used with 1/4" and 3/8" threaded rod, "S" hooks, conduit hangers, electrical box, & #10-24 or 1/4"-20 bridle rings
- Tapping 1/4"-20 bottom and back
- Also #10-24 tapping on back



Static Load Limit: 100 lbs

CAT. NO.	ACCOMMODATES		BOX QTY
	FLANGE	DROP ROD	
18016	UP TO 1/2" THICK	1/4" - 3/8"	100



Square Washer

CAT. NO.	BOLT SIZE	HOLE SIZE	BOX QTY
17612	1/4"	5/16"	100
17616	3/8"	7/16"	100
17618	1/2"	9/16"	100

2 Hole Corner Angle

CAT. NO.	BOX QTY
17628	50



3 Hole Cross Corner Angle

CAT. NO.	BOX QTY
17633	50




4 Hole 3 Way Corner Angle

CAT. NO.	BOX QTY
17634	25



Plastic White End Caps



CAT. NO.	CHANNEL USED WITH	BOX QTY
17682	13/16"	100
17684	1-5/8"	100

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
 FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT WWW.MORRISPRODUCTS.COM

Flange Mount Conduit Assembly Bottom Mount - Posi-Lock



- Suspends conduit from bottom of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 75 lbs

CAT. NO.	FLANGE THICKNESS	FITS CONDUIT	BOX QTY
18200	1/8" TO 1/4"	3/8"	100
18050	1/8" TO 1/4"	1/2" & 3/4"	100
18202	1/8" TO 1/4"	1"	100

Flange Mount Conduit Assembly Side Mount - Posi-Lock



- Suspends conduit from side of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 25 lbs

CAT. NO.	FLANGE THICKNESS	FITS CONDUIT	BOX QTY
18230	1/8" TO 1/4"	3/8"	100
18231	1/8" TO 1/4"	1/2" & 3/4"	100
18232	1/8" TO 1/4"	1"	100
18240	5/16" TO 1/2"	1/2" & 3/4"	100
18241	5/16" TO 1/2"	1"	100

Beam Clamp to Conduit Hanger Assembly



18140

- Spring Steel Beam Clamp with Pre-Installed Conduit Hanger
- Positive Locking Conduit Hanger

Static Load limit:
100 lbs Vertical
25 lbs Horizontal

CAT. NO.	ORIENTATION	FITS CONDUIT	BOX QTY
18130	BOTTOM MOUNT	1/2" & 3/4"	100
18140	SIDE MOUNT	1/2" & 3/4"	100

Spring Steel Beam Clamps 1/4-20 X 3/8" Stud



- Can be used to suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 3/4"
- Beam clamp with 1/4"-20 x 3/8" staked stud used to suspend box from bottom of beam

Static Load Limit: 75 lbs

CAT. NO.	FLANGE THICKNESS	BOX QTY
18123	1/8" - 1/4"	100
18124	5/16" - 1/2"	100

Spring Steel Beam Clamps Universal



- Can be used on Bulb Tees & Beams
- Clearance for 1/4" Bolt in Tab

Static Load Limit: 200 lbs

CAT. NO.	FLANGE THICKNESS	BOX QTY
18018	1/8" TO 1/4"	100
18020	5/16" TO 1/2"	100
18152	9/16" TO 3/4"	100

Z Purlin Rod Hanger Assembly



- Installed without power tools
- Compensates for angle of purlin

Static Load Limit: 100 lbs

CAT. NO.	FOR USE WITH	BOX QTY
18160	1/4" THREADED ROD	100
18161	3/8" THREADED ROD	100

Z Purlin Flange Hangers



18180

- Fits 1/16" to 1/4" thick Z Purlin or vertical flanges
- Clearance for 1/4" bolt
- Accommodates tooling for floor installations
- Can be used with S-hooks, perforated strap & wire

Static Load Limit:
18180 - 100lbs
18181 - 160lbs

CAT. NO.	FLANGE THICKNESS	FOR USE WITH	BOX QTY
18180	1/16" TO 1/4"	FOR USE WITH ANGLED Z PURLIN	100
18181	1/16" TO 1/4"	VERTICAL FLANGE	100

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT: WWW.MORRISPRODUCTS.COM



- 1/2 Gallon Tank Capacity
- Continuous Duty Limit: 140F
- Not Suitable for Over 160F at Inlet
- 1.6 Gallons a Minute
- 22' Lift Height

CAT. NO.	DESCRIPTION	BOX QTY
ULTRACP-22	CONDENSATE PUMP - 120V	6
ULTRACP-22T	CONDENSATE PUMP - 120V W/20' 3/8" TUBE	6
ULTRACP-22-230	CONDENSATE PUMP - 230V	6
ULTRACP-22T-230	CONDENSATE PUMP - 230V W/20' 3/8" TUBE	6

CP-22 Pumps



ULTRACP-22



- Reduced Height for Restricted Spaces
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz
- 22' Lift

CAT. NO.	DESCRIPTION	BOX QTY
NEW CP-22LPT	CONDENSATE PUMP - 115V - LOW PROFILE	6
CP-22LP	CONDENSATE PUMP - 120V - LOW PROFILE	6
CP-22LP-230	CONDENSATE PUMP - 230V - LOW PROFILE	6

CP-22 Low Profile Pumps



CP-22LP



- Flow Rate @ Zero Head: 1.2 gallons per minute
- Rated for 120 VAC
- 16' Lift
- Continuous Duty Limit: 140F

CAT. NO.	DESCRIPTION	BOX QTY
PROCP-16	CONDENSATE PUMP 16' LIFT 230V	1

General Purpose Pumps



ClearVue™ Mini Ductless System Pump

- Featuring super quiet operation
- Designed for ductless system installations
- Variable Speed and Lift
- Floatless Sensor™

CAT. NO.	DESCRIPTION	BOX QTY
CVMINI	CLEARVUE MINI - DUCTLESS SYSTEM PUMP	6



IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Wet Switch Flood Detector Hockey Pucks



- Turns Off Equipment with as Few as 1-2 Drops of Water Detection
- LED Indicators
- Connect Multiple Switches to Expand Protection Area
- Flexible Placement Options
- 4 Wire Installation
- Test Reset Buttons
- 250V Rated

CAT. NO.	DESCRIPTION	BOX QTY
WS-1	WET SWITCH FLOOD DETECTOR	12

Pipe Mounted Switches



- Detects Rising Water Levels in Drain Pipes
- Shuts Off System, Preventing Water Damage
- Magnetic Reed Switch Operated
- Durable Plastic Construction

CAT. NO.	DESCRIPTION	BOX QTY
CS-1	CONDENSATE SWITCH - TEE	10

CS-3 Condensate Pan Switch



- Condensate Overflow Protection
- Clip-On Pan Switch
- Magnetic Reed Switch Operated

CAT. NO.	DESCRIPTION	BOX QTY
CS-3	CONDENSATE SWITCH - CLIP	10

Condensate Cop™



- Easy to use
- Simple to install
- Large over-clamping Fitting
- Separate float/probe assembly swivels
- Swivel action allows the installer to position the float switch for best operation
- Probe features an inlet grill
- Two wire connection for easy hook up to a thermostat

CAT. NO.	DESCRIPTION	BOX QTY
CC-1	CONDENSATE COP™ DRAIN PAN SWITCH	12

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Electronically Commutated Direct Drive Motors

- High Efficiency ECM: Up to 80% Efficient
- Replaces Either PSC or X13 Model of Equivalent HP
- Dual Voltage Design: Replace 115 or 230V with One Motor
- Wiring Harness and Simple Installation Guide Included
- Rotation Sensing Technology
 - Automatically Selects Rotation Upon First Start Up
- 45" Wiring Harness
- Easy to Install
- Internal MOV (Metal Oxide Varistors) Surge Protector



EC MAX

CAT. NO.	HP	VOLTS	RPM	AMPS	HERTZ	SHAFT DIMENSION	LENGTH LESS SHAFT	MOTOR TYPE	CORD LENGTH
46012M*	1/2	115/230	1075	6.7/4.0	60/50	1/2" X 5"	6-3/8"	ECM	45"
46034M*	3/4	115/230	1075	8.2/4.9	60/50	1/2" X 5"	7-5/8"	ECM	45"
46001M*	1	115/230	1075	11.0/6.7	60/50	1/2" X 5"	7-5/8"	ECM	45"

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Packard 3.3" Motors

- 3.3" Diameter
- Rotation is Determined by Viewing the Lead End (Opposite Shaft)
- Open /Totally Enclosed
- Replacement 3.3" Motors
- Sleeve Bearings
- Stud Mounting
- Motors have 4 studs on Both Ends



Packard

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	ENCLOSURE	DIRECT REPLACEMENT FOR
40132M*	1/20	115	1550	1.80	I	CW	5/16" X 2-1/4"	2-3/4"	OPEN	HEATCRAFT/BOHN
40133M*	1/20	115	1550	1.80	I	CCW	5/16" X 2-1/4"	2-3/4"	OPEN	HEATCRAFT/BOHN
40120M*	1/70	115	1550	0.70	I	CW	1/4" X 2-1/4"	2-1/16"	OPEN	EMERSON 9621, UE 14
40121M*	1/70	115	1550	0.70	I	CCW	1/4" X 2-1/4"	2-1/16"	OPEN	TRANE MOT-6225, UE 15
40122M*	1/80	115	1550	0.65	I	CW	1/4" X 2-1/4"	2-1/16"	TOTALLY ENCLOSED	-

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW 3.3" Fan and Blower Duty - Nutone Replacements

DIRECT REPLACEMENTS FOR NUTONE AND MANY OTHER POPULAR RANGE HOODS

- Rotation is Determined by Viewing the Shaft End
- Shaded Pole
- Stud and Ring Mounting
- 60 Hertz
- Automatic Overload
- Includes Cord and Plug

Packard



CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
52514M*	1/100	115	1550	1.60	CW	1/4" X 1-1/8"	2-1/16"	SLEEVE	TOTALLY ENCLOSED	UE 692

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

WWW.MORRISPRODUCTS.COM

1-888-777-6678

NEW 3.3" Motor OEM Replacements



- Stud Mounting
- Single Speed, Single Phase
- Special Lyall Plug and Cord Included
- Open Enclosure
- Automatic Overload
- 60 Hertz
- All Copper Windings
- Low Temp Oil

CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	MOTOR TYPE	DIRECT REPLACEMENT FOR
41124B	1/15	120	1550	2.00	CWSE	5/16" X 1-1/8"	2-1/16"	BALL	SHADED POLE	KEEPRITE - 1043336 BOHN - 5008S MAGNETEK - 572
41126B	1/15	208-230	1550	1.10	CWSE	5/16" X 3.05"	3.56"	BALL	SHADED POLE	PACKARD - 82507 FASCO - D1126 FASCO - 7163-7216

NEW Permanent Split Capacitor Replacements for Bohn, Emerson, GE and Heathcraft



- Permanent Split Capacitor
- Capacitor Required: 4 mfd-370 Volts (Supplied with Motor)
- Multi-Horsepower
- Electrically Reversible, Includes Reversing Plug
- Open Enclosure
- Single Phase
- 50/60 Hertz
- All Angle Mounting
- UL Recognized
- Low Temp Oil
- Ball Bearing

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	MOUNTING	DIRECT REPLACEMENT FOR
9721	1/12	115/208-230	1550	1.10/0.50	5/16" X 3-1/4"	3-5/8"	STUD	BOHN 25309101 EMERSON 9656, 9664 HEATCRAFT 7071061

NEW Split Capacitor Replacements for Fasco



- Packard PSC Motor
- Multi-Horsepower
- Open Enclosure
- Single Phase
- 50/60 HZ
- All Angle Mounting
- Capacitor Mounted on Motor
- Electrically Reversible, Includes Reversing Plug
- Low Temp Oil
- Has All Copper Windings
- UL Recognized

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR
49101M*	1/12-1/15-1/20	115/208-230	1550/1400	1.10/0.50	5/16 X 3-1/8"	3-5/8"	BALL	STUD	GE 5KSM59JSK1435 GE 5KSM59LS2262AS HEATCRAFT 25309101 HEATCRAFT 7071061 INTERLINK 25309501S INTERLINK 25309801S FASCO 9721

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW

Direct Replacements for Broan / Lomanco

- Open Enclosure
- Automatic Overload
- Single Phase
- 42 Frame
- Made in the USA

**Packard**


CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	MOUNTING	DIRECT REPLACEMENT FOR
69317M*	1/7	120	1100	4.30	CWSE	1/2" X 2-5/8"	2-5/8"	SLEEVE	STUD	BROAN 97009317 BROAN 99080267
70059M*	1/10	120	1100	3.40	CWSE	1/2" X 1-5/8"	2-1/4"	SLEEVE	LUG	LOMANCO A0510B2497 LOMANCO A0416B2059 LOMANCO A0510B2389

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW

Permanent Split Capacitor Condenser Fan Motors

- Permanent Split Capacitor
- Single Speed
- Reversible Rotation
- Totally Enclosed
- Automatic Overload
- 48 Frame
- 60 Hertz
- Single Phase
- Rheem Mounting
- 4 Drilled and Tapped Holes in Shell for Rheem applications

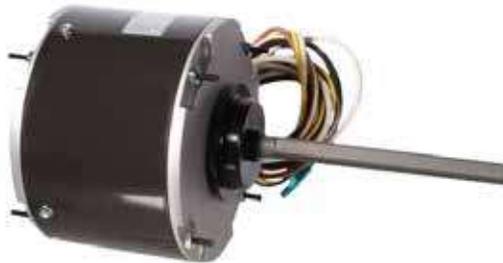**Packard**

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR
80825M*	1/8	208-230	825	1.00	1/2" X 6-1/2"	3-7/8"	BALL	5MFD/370V	EMERSON 1872
40825M*	1/4	208-230	825	1.3-1.4	1/2" X 6-1/2"	4-5/8"	BALL	5MFD/370V	EMERSON 1874
43732M*	1/4	208-230	1075	1.8-2.0	1/2" X 6-1/2"	4-1/8"	BALL	5MFD/370V	EMERSON 1860 & 1876
30825M*	1/3	208-230	825	1.6-1.8	1/2" X 6-1/2"	5-1/8"	BALL	7.5MFD/370V	EMERSON 1875
43733M*	1/3	208-230	1075	2.2-2.5	1/2" X 6-1/2"	4-5/8"	BALL	7.5MFD/370V	EMERSON 1861 & 1877
43734M*	1/2	208-230	1075	3.0-3.5	1/2" X 6-1/2"	5-1/8"	BALL	10MFD/370V	EMERSON 1862 & 1878

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

WWW.MORRISPRODUCTS.COM

1-888-777-6678

NEW Permanent Split Capacitor Condenser Fan Motor



- Permanent Split Capacitor
- Single Speed
- Reversible Rotation
- Totally Enclosed
- Automatic Overload
- 48 Frame
- 60 Hertz
- Single Phase
- Rheem Mounting
- 4 drilled and tapped holes in shell for Rheem applications
- All angle mount bearings
- Use rain shield when necessary
- Electrically reversible

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARING	CAPACITOR REQUIRED
D7909	1/4	208-230	1075	1.80	1/2" X 6-1/2"	4"	BALL	5MFD/370V


NEW 5-5/8" Multi-Horsepower Condenser Fan Motors



- Class F Insulation
- 70°C Ambient
- Ball Bearing
- Single Speed
- Drilled and Tapped Holes in the Shell for Rheem Mounting
- Reversible
- All Angle Mounting
- Extended Thru Bolts
- 36" Leads
- Energy Efficient PSC Design
- UL Recognized

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIMENSION	LENGTH LESS SHAFT	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR
45488B	1/4-1/5-1/6-1/8	208-230	825	1.8-2.0	1/2" X 6-1/2"	4-1/8"	BALL	7.5MFD 370V	EMERSON 5464 RHEEM 5I-20760-II RHEEM 5I-21276-01 RHEEM 5I-23054-13 RHEEM 5I-23055-12
45458B	1/3-1/4-1/5-1/6	208-230	1075	1.8-2.0	1/2" X 6-1/2"	4-1/8"	BALL	7.5MFD 370V	EMERSON 5458 EMERSON 5462 RHEEM 5I-20354-II RHEEM 5I-20668-II RHEEM 5I-23053-II RHEEM 5I-23055-II

NEW Vulcan High Temperature 48 Frame Outdoor Condenser Fan Motors

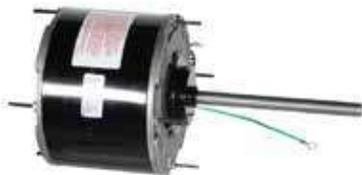

- Class F Insulation
- 70°C Ambient
- Ball Bearing
- Single Speed
- Drilled and Tapped Holes in the Shell for Rheem Mounting
- Reversible
- All Angle Mounting
- Extended Thru Bolts
- 36" Leads
- Energy Efficient PSC Design
- UL Recognized

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR
43732F	1/4	208-230	1075	1.8-2.0	1/2" X 6-1/2"	4-5/8"	BALL	5MFD/370V	EMERSON 1874

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Single Speed Condenser Fan Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard 48 Frame Motor Casing Size
- Standard Shaft Length, Diameter, and Flats
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- Low Power Consumption
- 70° C Ambient Design
- Electrically Reversible
- Electrically Reversible Continuous Air Over
- Quiet Operation
- Extended Studs
- 30" Leads
- 60 HZ
- Shaft Diameter 1/2"

CAT. NO.	HP	VOLTAGE	SPEED	FLA	CASE QTY
WG840727	1/6	208-230	1075/1	1.3	1
WG840728	1/4	208-230	1075/1	2.2	1
WG840729	1/3	208-230	1075/1	2.8	1
WG840730	1/2	208-230	1075/1	4.2	1
WG840731	3/4	208-230	1075/1	4.5	1
WG840204	1/4	208-230	825/1	1.5	1
WG840205	1/3	208-230	825/1	2.2	1



BALL BEARINGS NOW STANDARD



Direct Drive Furnace Blower Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Uses 370V Capacitors
- Standard 48 Frame Motor Casing Size
- 2.5" Diameter Hub Rings included
- Low Power Consumption
- Automatic Thermal Overload Protector
- Continuous Duty, Air Over
- Electrically Reversible
- Class B Insulation
- Speed: 1075/3
- Quiet Operation
- 60 HZ
- Shaft Diameter 1/2"

CAT. NO.	HP	VOLTAGE	SPEED	FLA	CASE QTY
WG840583	1/4	115	1075/3	4.2	1
WG840584	1/4	208-230	1075/3	2.0	1
WG840585	1/3	115	1075/3	5.5	1
WG840586	1/3	208-230	1075/3	2.8	1
WG840587	1/2	115	1075/3	7.5	1
WG840588	1/2	208-230	1075/3	3.6	1
WG840589	3/4	115	1075/3	11.3	1
WG840590	3/4	208-230	1075/3	5.4	1
WG840595	1	115	1075/3	12.6	1
WG840596	1	208-230	1075/3	5.59	1



Multiple Horsepower Condenser Fan Motors

- The Multi-Horsepower motors are specially designed to cover a range of applications
- The condenser fan motors horsepower ranges from 1/2 to 1/5; 1/3 to 1/6 both at 1075 rpm; 1/3 to 1/6 at 825 RPM
- Reversing plugs
- Extended thru bolts
- 36 inch leads
- Designed for 370 Volt capacitors
- Installs with all 48 frame mounting brackets
- Shaft Diameter 1/2"
- 70° C Ambient Design



CAT. NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	CASE QTY
WG840465	CF	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5	-	1
WG840468	CF	208-230	1075/2	1/2-3.0	1/3-2.5	1/4-2.0	1/5-1.3	-	1
WG840469	CF	208-230	825/2	1/3-2.1	1/4-1.7	1/5-1.5	1/6-1.2	-	1

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Multiple Horsepower Direct Drive Blower Motors



- Reversing plugs
- Extended thru bolts
- 36 inch leads
- Designed for 370 Volt capacitors
- Installs with all 48 frame mounting brackets
- Shaft Diameter 1/2"

CAT. NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	CASE QTY
WG840463	DDFB	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	1
WG840464	DDFB	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	1
WG840466	DDFB	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	1
WG840467	DDFB	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	1

NEW 5-5/8" Direct Drive Blower Motors



- Permanent Split Capacitor
- Continuous Air Over
- 2-1/2" Mounting Rings
- Class B Insulation
- 40°C Ambient
- Electrically Reversible
- Open Enclosure
- Automatic Overload
- 48 Frame
- 60 Hertz
- Single Phase
- 3 Speeds

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR
43582M*	1/6	208-230	1075	1.40	1/2" X 7"	4	SLEEVE	5MFD/370V	GE 3582 EMERSON 8896
43583M*	1/4	115	1075	4.40	1/2" X 4-1/2"	4	BALL	5MFD/370V	GE 3583 EMERSON 1863
43584M*	1/4	208-230	1075	1.70	1/2" X 4-1/2"	4	BALL	5MFD/370V	GE 3584 EMERSON 1971
43585M*	1/3	115	1075	6.00	1/2" X 4-1/2"	4-1/4	BALL	5MFD/370V	GE 3585 EMERSON 1864
43586M*	1/3	208-230	1075	2.60	1/2" X 4-1/2"	4-1/4	BALL	5MFD/370V	GE 3586 EMERSON 1972
43587M*	1/2	115	1075	7.80	1/2" X 4-1/2"	5-1/8	BALL	5MFD/370V	GE 3587 EMERSON 1865
43588M*	1/2	208-230	1075	3.60	1/2" X 4-1/2"	5-1/8	BALL	5MFD/370V	GE 3588 EMERSON 1973
43589M*	3/4	115	1075	10.50	1/2" X 4-1/2"	5-1/8	BALL	15MFD/370V	GE 3589 EMERSON 8904
43590M*	3/4	208-230	1075	4.60	1/2" X 4-1/2"	5-1/8	BALL	10MFD/370V	GE 3590 EMERSON 8905

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW 5-5/8" Direct Drive Blower Motors



- Permanent Split Capacitor
- Continuous Air Over
- 2-1/2" Mounting Rings
- Class B Insulation
- 40° Ambient
- Electrically Reversible
- Open Enclosure
- Automatic Overload
- 48 Frame
- 60 Hertz
- Single Phase
- 3 Speeds

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	CAPACITOR REQUIRED
D729	3/4-1/2-1/3	208-230	1075	5.40	1/2" X 6"	5-1/2"	SLEEVE	10MFD/370V

NEW 5-5/8" Multi-Horsepower Direct Drive Blower Motors

- Permanent Split Capacitor
- Multiple Capacitor/Speed Combinations
- Continuous Duty, Air Over
- Mounting Rings, Thru Bolts and Holes in Shell
- Class B Insulation
- Reversible Rotation
- Automatic Overload
- 48 Frame
- 60 Hertz
- Single Phase
- 5 Speed



CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
45460M*	1/2-1/3-1/4/5-1/6	115	1075	5.80-5.10-3.50-3.20-2.20	REV	PSC	SLEEVE	OPEN	EMERSON 5460 RHEEM 51-23012-4I
45461M*	1/2-1/3-1/4/5-1/6	208-230	1075	2.90-2.50-1.80-1.40-1.30	REV	PSC	SLEEVE	OPEN	EMERSON 5461 RHEEM 51-23022-4I
45470M*	3/4-1/2-1/3-1/4-1/5	115	1075	9.10-6.50-5.50-4.00-2.30	REV	PSC	SLEEVE	OPEN	EMERSON 5470 RHEEM 51-23017-4I
45471M*	3/4-1/2-1/3-1/4-1/5	208-230	1075	4.60-3.30-3.40-2.30-1.70	REV	PSC	SLEEVE	OPEN	EMERSON 5471 RHEEM 51-21898-0I

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW 5-5/8" Torsion Flex Direct Drive Blower Motors

- Permanent Split Capacitor
- Continuous Air Over
- Energy Efficient
- Electrically Reversible
- Automatic Overload
- Open Enclosure
- 48 Frame
- Single Phase
- 60 Hertz



CAT. NO.	HP	VOLTAGE	RPM	AMPS	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR
43782M*	1/6	115	1075	2.50	1/2" X 5"	4"	PSC	SLEEVE	5MFD/370V	3782
43783M*	1/4	115	1075	3.60	1/2" X 6"	4"	PSC	SLEEVE	5MFD/370V	3783
43784M*	1/4	208-230	1075	1.80-2.00	1/2" X 6"	4"	PSC	SLEEVE	5MFD/370V	3784
43785M*	1/3	115	1075	4.80	1/2" X 6"	4-1/4"	PSC	SLEEVE	10MFD/370V	3785, 9377
43786M*	1/3	208-230	1075	2.30-2.60	1/2" X 6"	4-1/4"	PSC	SLEEVE	10MFD/370V	3786
43787M*	1/2	115	1075	8.00	1/2" X 6"	4-7/8"	PSC	SLEEVE	10MFD/370V	3787
43788M*	1/2	208-230	1075	3.30-4.00	1/2" X 6"	4-7/8"	PSC	SLEEVE	10MFD/370V	3788
43789M*	3/4	115	1075	9.00	1/2" X 5"	5 1/4"	PSC	SLEEVE	15MFD/370V	3789

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW 5-5/8" Diameter Unit Heater Motors



MOTORS COME WITH STRONG BALL BEARING CONSTRUCTION. UTILIZE MOTOR IN UNIT HEATERS, BLOWER EQUIPMENT AND OTHER SHAFT-MOUNTED FANS.

- Permanent Split Capacitor
- Class B Insulation
- Dual Bolt Circle Applications
- Continuous Duty Air Over
- Single Phase
- Includes Capacitor Mounted On Motor
- Horizontal or Vertical Mounting
- 1" Extended Studs
- Single Phase
- Automatic Overload
- UL Recognized
- Mounting Clamps Included
- 40066 - Base Not Included
- 48 Frame

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEED	ROTATION	BEARINGS	ENCLOSURE	HERTZ	SHAFT DIMENSION	MOUNTING
40066M*	1/6	115	1075	2.4	1	REV	BALL	ENCLOSED	60	1/2" X 3-3/8"	STUD & RESILIENT
40025M*	1/4	115	1075	3.4	1	REV	BALL	ENCLOSED	60	1/2" X 2-1/2"	STUD & MOUNTING RINGS
40033M*	1/3	115	1075	5.3	1	REV	BALL	ENCLOSED	60	1/2" X 2-1/2"	RESILIENT BASE

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW 48/56 Frame, Split Phase Belt Drive Fan and Blower Motors



CENTRIFUGAL PUMPS, BELT DRIVE FURNACE BLOWERS, FANS

- 40° Ambient
- Continuous Duty
- 5/8" Shaft Adapter and Key Included
- Resilient Base Has 48 and 56 Frame Mounting Holes
- Class B Insulation
- Electrically Reversible
- Open Drip Proof Enclosure
- Full Service Factor Ratings
- Split Phase
- Automatic Overload
- 60 Hertz
- Single Speed

CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	SERVICE FACTOR	SHAFT DIAMETER	LENGTH LESS SHAFT	FRAME	BEARING	DIRECT REPLACEMENT FOR
SINGLE VOLTAGE											
45014M*	1/4	115	1725	4.00	REV.	1.35	1/2" X 1-7/8"	7-3/4	48/56	SLEEVE	EMERSON 8000 GE 4701 MARATHON B206
45013M*	1/3	115	1725	6.60	REV.	1.35	1/2" X 1-1/2"	7-7/16	48/56	SLEEVE	EMERSON 8100 GE 4706 MARATHON B207
45012M*	1/2	115	1725	8.30	REV.	1.25	1/2" X 1-1/2"	8-1/2	48/56	SLEEVE	EMERSON 8200 GE 4708 MARATHON B208
DUAL VOLTAGE											
45013D	1/3	115/208-230	1725	6.60/ 3.40-3.10	REV.	1.35	1/2" X 1-7/8"	6.75	48/56	BALL	MARATHON B305
45012D	1/2	115/208-230	1725	7.60/ 3.70-3.80	REV.	1.25	1/2" X 1-7/8"	8.58	48/56	BALL	MARATHON B307
45230D	3/4	115/208-230	1725	11.60/ 5.90-5.80	REV.	1.25	5/8" X 1-7/8"	10.55	56H	BALL	MARATHON 56S1702060

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW

Nidec Evaporative Cooler Motors

- 56Z Frame
- Ball Bearing
- 60 Hz
- 2-1/2" Mtg Rings
- Automatic Overload



CAT. NO.	HP	RPM	VOLTAGE	SPEED	AMPS	CENTER RING TO CENTER RING	EXTENDED DESCRIPTION	DIRECT REPLACEMENT FOR
2423	1	1725/1140	230	2	7.0	9.50"	CAPACITOR START, REVERSIBLE, RESILIENT BASE	2396

NEW

Utility Fan Motor Kits

- Applications: Evaporators, refrigerators, range hoods, ventilators exhaust fans and unit heaters
- Shaded pole
- Sleeve bearings
- Stud mounting
- Rotation is determined by viewing the shaft end
- Direct Replacements for Delfield, Bohn, Gemline and Nutone
- Assembled with bracket as illustrated
- Includes two prong plug



CAT. NO.	STACK SIZE	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION	HERTZ	DIRECT REPLACEMENT FOR
82423K	5/8"	120	3000	0.50	1	CW	7/32" X 1-1/2"	60	NUTONE 89423-000

NEW

Utility Fan Motor Kits

- Kit Includes Motor, two prong plug, Mounting Bracket & Blower Wheel
- CCW Rotation is Determined by Viewing the Shaft End
- 60 Hz
- Shaded Pole
- Sleeve Bearings
- Assembled with bracket as illustrated



CAT. NO.	STACK SIZE	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION	HERTZ	DIRECT REPLACEMENT FOR
65894K	3/4"	120	3000	0.90	1	CCW	7/32" X 2-3/8"	60	NUTONE 82229 NUTONE K5894

NEW

Utility Fan Motor Kits

- Applications: Evaporators, refrigerators, range hoods, ventilators exhaust fans and unit heaters
- Shaded Pole
- 60 Hertz
- Mechanically Reversible
- Rotation is Determined by Viewing the Shaft End



CAT. NO.	STACK SIZE	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR
65670M*	5/8"	115	3000	0.40	1	CW	3/16" X 1-1/4"	SP	SLEEVE	ACME 600, ACME 700 ACME 710 GEMLINE EM670 ROBERTSHAW 14001
65690M*	5/8"	120	3000	0.50	1	CW	3/16" X 1-3/8"	SP	SLEEVE	GEMLINE EM690

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW

Square Frame Condenser Fan Motors



- All angle self-aligning sleeve bearings
- Totally Enclosed
- Class B insulation
- Standard operating temperatures:
-40°F to +104°F (-40°C to +40°C)
- UL recognized
- Rear mount: 6 tapped holes #8-36 thread
- Foot mount: 4 holes, #8-36 thread
- Continuous air over

INDUSTRIAL AND COMMERCIAL REFRIGERATION FANS FOR CONDENSING, VENTILATING AND EVAPORATOR UNITS, WALK-IN AND REACH-IN COOLERS, FREEZERS, FOOD AND BEVERAGE CHILLERS.

CAT. NO.	WATTAGE	VOLTAGE	RPM	AMPS	ROTATION	PROTECTION
PSQ5CW115	5	115	1550	0.40	CW LEAD END	THERMAL
PSQ9CW115	9	115	1550	0.58	CW LEAD END	THERMAL
PSQ9CW230	9	230	1550	0.35	CW LEAD END	THERMAL
PSQ18CW115	18	115	1550	1.00	CW LEAD END	THERMAL

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Unitonix Unit Bearing EC Motors

COMMERCIAL REFRIGERATION WALK IN COOLERS AND FREEZERS, AIR MOVING APPLICATIONS DEMANDING HIGH EFFICIENCY

- Electronically Commutated Motor
- Drop in Replacements for 3.3" Diameter
- Shaded Pole & PSC Motors
- Includes Lyall Plug
- Standard Thru Bolt Configuration
- Rotation Determined Viewing the Shaft End
- Efficiencies Up To 3 Times Higher Than Shaded Pole Motors and 40% Higher Than PSC
- Totally Enclosed, Air Over
- Automatic Overload
- Unit Bearing
- Made in the USA 



CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	MOUNTING	DIRECT REPLACEMENT FOR
1521IM*	1/15-1/25	115	1550	1.25	CWSE	4 STUDS SE	HEATCRAFT, BOHN, AND KRACK

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW EC Max^{RM} RM



THE NEW EC MAX^{RM} REFRIGERATION MOTOR IS THE NEWEST MEMBER OF THE EC MAX LINE - IT IS SPECIFICALLY DESIGNED WITH REFRIGERATION CONTRACTORS IN MIND. IT COVERS A WIDE RANGE OF WATTS, THEREBY REDUCING YOUR INVENTORY. THE BACK OF THE MOTOR FEATURES 5 DRILLED & TAPPED HOLES FOR MOUNTING ON VARIOUS OEM APPLICATIONS AS WELL AS DOUBLE FOOT PAD MOUNTING OPTIONS. THE FRONT OF THE MOTOR FEATURES FOUR THREADED HOLES DESIGNED TO EASILY ADAPT TO VARIOUS TOP-MOUNT APPLICATIONS.

- IP67 Protection Against Dust and Water
- High Efficiency & Wide Replacement Capability
- Mounting Hardware Included
- Ball Bearing Design for All Angle Mounting
- Double Foot Pad with Threaded Mounting Holes



CAT. NO.	WATTAGE	VOLTAGE	RPM	AMPS	HERTZ	ROTATION	SHAFT DIMENSION	LENGTH LESS SHAFT
541IEC	4-25	115-230	1550-1725	0.1-0.56/0.06-0.34	60/50	CWSE	1/4" X 1/2"	3"

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Solid State Commutated Unit Bearing Motors



- The Next Generation of ECM Unit Bearing Motor with Multi-Watt Range Capability
- Used for Commercial Refrigeration
- IP65 Certified Making it Compatible for Applications Where the use of Pressurized Water for Wash Down is a Standard Procedure
- ATEX Certified Allowing its Application Where Flammable Refrigerants are used
- 66% Peak Efficiency = 45% Higher than a PSC Motor
- Ball Bearing with Low Temperature Grease
- Operating Temps: -40° C to 55° Ambient
- 5 Drilled & Tapped Mounting Holes on Rear of the Motor

CAT. NO.	WATTAGE	VOLTAGE	RPM	AMPS	HERTZ	ROTATION	SHAFT DIMENSION
10042M*	35-50	208-230	1550	0.45	50/60	CCW	1/4" THREADED

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Electronically Commutated Refrigeration Motors

SUPERMARKET REFRIGERATION, VENDING MACHINES AND OTHER CONDENSER AND EVAPORATOR FAN APPLICATIONS.



- Drop in replacement for shaded pole and PSC motors
- Electronically commutated motors with integrated electronic control
- ECR up to 70% energy savings; UL recognized
- IP55 moisture and dust protection
- Totally enclosed, ball bearings, CCWSE rotation, can be mounted in any position
- Operating temperature of ECR ONE motors: -22°F to +122°F
- Operating temperature of ECR UltraSynch motors: -22°F to +104°F
- Motors are built using 30% less copper and 80% less steel for a greener, more affordable solution
- ECR UltraSynch motor includes Lyall plug
- ECR ONE is a constant torque motor and will replace a shaded pole motor of matching wattage using the same fan blade
- ECR UltraSynch is a constant speed motor operating at 1800 RPM over a wide range of voltage and load conditions. The correct fan blade must be specified to properly balance air flow.

CAT. NO.	WATTS	VOLTAGE	RPM	AMPS	HERTZ	CASE QTY
ECR ONE CONSTANT TORQUE MOTOR						
ECR01A0243*	16	115	1550	0.41	60	
ECR ULTRA SYNCH CONSTANT SPEED MOTOR						
ECR92PAI2	9-16	120	1800	0.34	60	

* 7 DRILLED AND TAPPED INSERTS FOR MOUNTING

NEW Kryo™ Fortress Motor



A HIGH-EFFICIENCY EC MOTOR WITH A DUST-TIGHT, WATER-TIGHT IP66 RATING.

- Replace 28 different motor ratings
- Dual voltage
- Reversible
- Multi-mount
- Energy efficient
- Cat. No. 2117 - 90° cord adapter available separately
- Energy Savings EC Design - Comparison 16 Watt Motors @ 1550 RPM

CAT. NO.	WATTAGE	VOLTAGE	RPM	AMPS	SPEED	ROTATION	BEARING	ENCLOSURE	SHAFT
MD541IS	4-0	90-240	1550	0.30-0.55	I	REV	BALL	IP66/IP67	1/4-20

NEW Cast Iron Unit Bearing Motors

- Shaded pole
- Rotation is determined by viewing the lead (opposite shaft) end



CAT. NO.	WATTS	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIMENSION	LENGTH LESS SHAFT	ENCLOSURE	HERTZ	DIRECT REPLACEMENT FOR
SINGLE FOOT PAD										
65411M*	9	115	1550	0.55	CW	1/4" X 1/2"	2-7/8"	TOTALLY ENCLOSED	50/60	GE 5411
65421M*	9	230	1550	0.27	CW	1/4" X 1/2"	2-7/8"	TOTALLY ENCLOSED	50/60	GE 5421
65811M*	16	115	1550	1.00	CW	1/4" X 1/2"	3-1/4"	TOTALLY ENCLOSED	50/60	GE 5811
65812M*	16	115	1550	1.00	CW	1/4" X 1/2"	3-1/4"	TOTALLY ENCLOSED	50/60	GE 5812
DOUBLE FOOT PAD										
61029M*	9	230	1550	0.27	CW	1/4" X 1/2"	2-1/2"	TOTALLY ENCLOSED	50/60	-
61009M*	9	115	1550	0.55	CW	1/4" X 1/2"	2-1/2"	TOTALLY ENCLOSED	50/60	-
61015M*	16	115	1550	1.00	CW	1/4" X 1/2"	3-1/32"	TOTALLY ENCLOSED	50/60	-
61018M*	16	230	1550	0.50	CCW	1/4" X 1/2"	3-1/32"	TOTALLY ENCLOSED	50/60	-

NEW Aluminum Unit Bearing Motors

- 5 mounting holes opposite the shaft end
- Double Foot Pads
- Rotation is Determined by Viewing the Lead End (Opposite Shaft)



CAT. NO.	WATTS	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIMENSION	LENGTH LESS SHAFT	ENCLOSURE	HERTZ	DIRECT REPLACEMENT FOR
64102M*	2	115	1550	0.25	CW	1/4" X 1/2"	2-3/8"	TOTALLY ENCLOSED	50/60	EMERSON 102
64108M*	9	115	1550	0.50	CW	1/4" X 1/2"	2-1/2"	TOTALLY ENCLOSED	50/60	EMERSON 108

NEW Cast Iron Unit Bearing Motors



CAT. NO.	WATTS	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIMENSION	LENGTH LESS SHAFT	TYPE	MOUNTING	DIRECT REPLACEMENT FOR
10009M*	9	115	1550	0.53	CW	1/4" X 1/2"	2-1/2"	SP	DOUBLE FOOT PADS	MORRILL SPB9EMI GE 5411

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Cast Iron Unit Bearing Motors

Packard



- Double foot pad
- Dual voltage
- 50/60 Hertz
- Shaded pole
- Rotation is determined by viewing the lead (opposite shaft end)
- Horizontal or shaft up mounting

CAT. NO.	WATTS	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIMENSION	LENGTH LESS SHAFT	ENCLOSURE	DIRECT REPLACEMENT FOR
65021M*	35	230	1500	0.70	CW	1/4"X1/2"	3-3/8"	TOTALLY ENCLOSED	TECUMSEH 810M035A21
65041M*	50	230	1500	0.85	CW	3/8" X 1-1/2"	3-5/8"	SEMI ENCLOSED	COPELAND 050-0244-00

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Electric Motors and Specialties Unit Bearing MotorsEM
& S

- Double foot pad mounting
- Mounting hardware included
- UL recognized
- Rotation is determined by viewing the lead (opposite shaft end)
- Cast iron
- Shaded pole
- Made in the USA

CAT. NO.	WATTS	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIMENSION	LENGTH LESS SHAFT	ENCLOSURE	HERTZ	DIRECT REPLACEMENT FOR
15041M*	50	230	1500	0.85	CW	3/8" X 1-1/2"	3-5/8"	OPEN	60	COPELAND 050-0244-00 EMS ESPOL50EM2
15045M*	50	230	1500	0.85	CCW	5/16" X 2-1/2"	3-5/8"	OPEN	60	TECUMSEH 810M050A62, EMS ESPOL50EMJR21
15049M*	50	208-230	1500	0.85	CW	3/8" X 1-1/2"	3-5/8"	OPEN	50/60	COPELAND 050-0241-01, EMS ESPOL50EMI3
15460M*	50	460	1500	0.44	CW	3/8" X 1-1/2"	3-5/8"	OPEN	60	COPELAND 050-0244-02, EMS ESPOL50EM461
15461M*	50	460	1500	0.44	CCW	5/16" X 2"	3/5/8"	OPEN	60	COPELAND 050-0264-03, ESPOL50EMJR41
15044M*	50	230	1500	0.85	CW	5/16" X 1-1/2"	3/5/8"	OPEN	60	ESPOL50EM2B
15126M*	50	208-230	1500	0.85	CW	1/4" - 20 THREAD	4.18"	OPEN	60	COPELAND 050-0344-00

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

WWW.MORRISPRODUCTS.COM

1-888-777-6678

NEW Carrier - Draft Inducers

DIRECT REPLACEMENTS FOR OEM GAS FURNACE INDUCERS

- Overload is automatic
- 60 Hertz
- Carefully sourced based on the original equipment specifications

CAT. NO.	VOLTAGE	AMPS	SPEEDS	SHAFT DIMENSION	LENGTH LESS SHAFT	TYPE	BEARINGS	DIRECT REPLACEMENT FOR
65570M*	230	0.80	1	1" X 5/16" X 1-7/8"	3-5/8"	SHADED POLE	BALL	HC24HE230 J238-15161
65569M*	115	1.80	1	1" X 5/16" X 1-7/8"	3-3/8"	SHADED POLE	BALL	HC21ZE117B J238-150220

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
65230M*	208-230	0.80	1	SHADED POLE	BALL	OPEN	J238-150-15103 HC24HE230

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	DIRECT REPLACEMENT FOR
66756M*	115	0.85	1	PSC	BALL	CWSE	320725-756
66757M*	115	0.85	1	PSC	BALL	CWSE	320725-757
66758M*	115	1.15	1	PSC	BALL	CWSE	320725-758

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	DIRECT REPLACEMENT FOR
66761M*	115	0.63/0.3	2	SHADED POLE	BALL	CWSE	326628-761
66762M*	115	1.06/0.28	2	SHADED POLE	BALL	CWSE	326628-762
66763M*	115	1.32/0.39	2	SHADED POLE	BALL	CWSE	326628-762

NOTES: INCLUDES MOTOR, 2 SPEED PLUG, COOLING FAN, BLOWER WHEEL, MOUNTING BRACKET, SCREWS & GROMMETS
*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



NEW Carrier - Draft Inducers

DIRECT REPLACEMENTS FOR OEM GAS FURNACE INDUCERS

- Overload is automatic
- 60 Hertz
- Carefully sourced based on the original equipment specifications

ELECTRICAL

DRAFT INDUCERS - Direct Replacements for Carrier



CAT. NO.	VOLTAGE	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66649M*	208-230	0.5	1	CCWSE	PSC	BALL	OPEN	48GS400106 48GS400649

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66815M*	208-230	0.48	1	PSC	BALL	OPEN	48SS400380 48SS400606 50DK406181

NOTES: 4 MFD/370 CAPACITOR REQUIRED

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66816M*	460	0.25	1	PSC	BALL	OPEN	48SS400381 48SS400607 50DK406182

NOTES: INCLUDES GASKET

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	DIRECT REPLACEMENT FOR
66752M*	115	1.80	1	CWOTE	SHADED POLE	BALL	310371-752

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66765M*	115	0.9/0.48	2	CWSE	PSC	BALL	OPEN	326628-765

NOTES: ASSEMBLY INCLUDES MOUNTING BRACKET, BLOWER WHEEL AND MOTOR. INCLUDES 3 PRONG MOLEX PLUG

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW

Goodman - Draft Inducers

DIRECT REPLACEMENT FOR OEM GAS FURNACE INDUCERS

- Overload is automatic
- 60 Hertz
- Carefully sourced based on the original equipment specifications

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66007M*	230	0.24	I	SHADED POLE	BALL	OPEN	0131G00007 0131G00093S

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
48331M*	115	1.80	I	SHADED POLE	BALL	OPEN	5KSB46GF0001S B4833000

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M
NOTES: INCLUDES RUBBER BOOT

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66002M*	115	1.20	I	SHADED POLE	BALL	OPEN	0131M00002P 0131M00002S

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M
NOTES: INCLUDES GASKET

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66000M*	230	1.4	I	SHADED POLE	BALL	OPEN	0271F00126 702112495

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66590M*	115	1.50	I	SHADED POLE	BALL	OPEN	B4059000, J238-112-11195 7002-3036, J238-11195

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66005M*	115	1.60	I	SHADED POLE	BALL	OPEN	B1859005 J238-11128

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66121M*	230	0.22	I	PSC	BALL	OPEN	0131M00121P 0131M00121S

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



ELECTRICAL DRAFT INDUCERS - Direct Replacements for Goodman

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COMWWW.MORRISPRODUCTS.COM

1-888-777-6678

NEW ICP - Draft Inducers

DIRECT REPLACEMENTS FOR OEM GAS FURNACE INDUCERS

- Overload is automatic
- 60 Hertz
- Carefully sourced based on the original equipment specifications



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66338M*	115	2.40	1	SHADED POLE	BALL	TOTALLY ENCLOSED	1012002 1013388A 1014338

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66833M*	115	1.60	1	SHADED POLE	BALL	OPEN	1010324,1010238P 1019833

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ROTATION	DIRECT REPLACEMENT FOR
66420M*	208-230	0.46	1	PSC	BALL	CCWSE	1178420
66421M*	208-230	0.68	1	PSC	BALL	CCWSE	1178421

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Nordyne - Draft Inducers

DIRECT REPLACEMENTS FOR OEM GAS FURNACE INDUCERS

- 1 Speed
- 60 Hertz
- Molex Plug
- Plastic housing
- Carefully sourced based on the original equipment specifications



CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
65404M*	120	0.3	1	SHADED POLE	SLEEVE	OPEN	903404

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Rheem - Draft Inducers

DIRECT REPLACEMENTS FOR OEM GAS FURNACE INDUCERS



- 1 Speed
- 60 Hertz
- Carefully sourced based on the original equipment specifications

CAT. NO.	VOLTAGE	AMPS	ROTATION	SHAFT DIMENSION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
21964K	208-230	0.25	CW	1/4" X 1-1/2"	SHADED POLE	SLEEVE	OPEN	51-21964-11

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

- Overload is automatic
- 1 Speed
- 60 Hertz
- Carefully sourced based on the original equipment specifications

NEW Rheem - Draft Inducers

DIRECT REPLACEMENT FOR OEM GAS FURNACE INDUCERS

CAT. NO.	VOLTAGE	AMPS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66847M*	120	1.70	SHADED POLE	BALL	OPEN	117104-01 117847-07 70-22838-82 70-24157-03

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	TYPE	BEARINGS	ROTATION	ENCLOSURE	DIAMETER	DIRECT REPLACEMENT FOR
82641M*	460	0.35	SHADED POLE	SLEEVE	CWSE	OPEN	3.3"	70-23641-81

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NOTES: INCLUDES GASKET AND CAP

CAT. NO.	VOLTAGE	AMPS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66781M*	115	0.60	PSC	BALL	OPEN	70-101087-81 7021-11559

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Trane - Draft Inducers

DIRECT REPLACEMENT FOR OEM GAS FURNACE INDUCERS

CAT. NO.	VOLTAGE	AMPS	TYPE	BEARINGS	ROTATION	ENCLOSURE	DIRECT REPLACEMENT FOR
66128M*	208-230	0.19	PSC	BALL	CCWSE	OPEN	7021-7833 BLW01310

NOTES: CAPACITOR AND GASKET INCLUDED

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	ROTATION	SPEEDS	TYPE	BEARINGS	DIRECT REPLACEMENT FOR
66311M*	208/230	0.21/0.16	CCWSE	2	PSC	BALL	BLW01311 D965130P01

NOTES: INCLUDES 1.5MFD/450VAC CAPACITOR, 2 SPEED MOLEX PLUG AND GASKET

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

CAT. NO.	VOLTAGE	AMPS	SPEEDS	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
66787M*	120	1.3	1	SHADED POLE	BALL	OPEN	D330787P01, D330809P01 BLW473, X38040305010 X38040305017

NOTES: INCLUDES SPECIAL PLUG

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

- 1 Speed
- 60 Hertz
- Carefully sourced based on the original equipment specifications

NEW York - Draft Inducers

DIRECT REPLACEMENT FOR OEM GAS FURNACE INDUCERS

CAT. NO.	VOLTAGE	AMPS	ROTATION	TYPE	BEARINGS	ENCLOSURE	OVERLOAD	DIRECT REPLACEMENT FOR
82702M*	115	1.2	CCWSE	SHADED POLE	SLEEVE	OPEN	AUTOMATIC	373-10337-702 7021-8612

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Broan - DEM - Motors

CAT. NO.	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
69316	120	110	3.40	1	CWSE	1/2" X 3-1/16"	2-1/4"	SP	SLEEVE	OPEN	97009316



CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
82152M*	1/20	120	1550	1.8	1	CWLE	1-3/4" X 5/16" X 1-3/4"	3"	SP	SLEEVE	OPEN	99080152

INCLUDES CORD AND PLUG

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Captive Aire

CAT. NO.	HP	RPM	VOLTAGE	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
62512M*	3/4-1	1625	115/230	1	REV.	0.50"	6.98"	PSC	BALL	OPEN	6251R2

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	HP	RPM	VOLTAGE	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
63100M*	1/3-1/2	1625	115/230	1	REV.	0.50"	5.98"	PSC	BALL	OPEN	6310R

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	HP	RPM	VOLTAGE	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
63110M*	1/2-3/4	1625	115/230	1	REV.	0.50"	6.82"	PSC	BALL	OPEN	6311R

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Carrier - DEM - Motors

CAT. NO.	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	DIRECT REPLACEMENT FOR
82113M*	115	1075	11.0	CWSE	1/2" X 2-7/8"	5-3/8"	PSC	BALL	HC45TE113 5KCP39PGV623CS

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Copeland - DEM - Motors

CAT. NO.	VOLTS	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIA.	HZ	DIRECT REPLACEMENT FOR
40265M*	208-230	1550	1.10	REV.	1/2" X 3"	3-1/2"	PSC	SLEEVE	OPEN	5-5/8"	50/60	050-0265-00 950-0265-00 K55HXP6P-5104
40250M*	208-230	1625	1.50	CCWSE	1/2" X 3" DOUBLE FLAT	4-1/4"	PSC	SLEEVE	OPEN	5-5/8"	50/60	950-0250-00 050-0250-00 K55HXJZJ-3126

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW First Company - OEM - Motors

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIAMETER	DIRECT REPLACEMENT FOR
8220IM*	1/4	208-230	1125	1.50	1	CCWSE	1/2" X 7-1/2"	4-3/8"	PSC	BALL	OPEN	5-5/8"	M201B

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



NEW Goodman - OEM - Draft Inducers

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIAMETER	DIRECT REPLACEMENT FOR
66590M*	1/30	115	3000	1.50	1	CWLE	SP	BALL	OPEN	C-FRAME	B4059000 J238-112-11195

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



NEW Greenheck - OEM - Motors

CAT. NO.	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	DIAMETER	ENCLOSURE	MOUNTING	TYPE	DIRECT REPLACEMENT FOR
90145M*	115	950	1.15	CWSE	5/16" X 2-5/8"	2-3/4"	SLEEVE	3.3"	QAO	STUD	SP	310145
90198M*	115	1050	1.80	CWSE	5/16" X 2-5/8"	3"	SLEEVE	3.3"	QAO	STUD	SP	310198

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	DIAMETER	MOUNT	DIRECT REPLACEMENT FOR
90318M*	115	1550/1300/1050	2.60	3	CCWSE	1/2" X 2-3/4"	3-5/8"	PSC CAPACITOR INCLUDED	BALL	5.12"	THRU BOLT	308318

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



CAT. NO.	VOLTS	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	DIAMETER	ENCLOSURE	MOUNT	TYPE	DIRECT REPLACEMENT FOR
90153M*	115	1725	4.60	CCWLE	1/2" X 2"	7-5/8"	BALL	5.69"	ODP	STUD	SPLIT PHASE	309153

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M



IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW**Heatcraft - Bohn - Larkin OEM - Motors**

CAT. NO.	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
9770IM*	230	1625	0.70	CWSE	5/16" X 2.95"	2.85"	ECM	BALL	TE	22617701 22617901 25307701 25307901
9780IM*	120	1625	1.20	CWSE	5/16" X 2.95"	2.85"	ECM	BALL	TE	22617801 22618001 25307801 25308001

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW**ICP - OEM - Draft Inducers**

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
A170	1/25	115	3400	2.30	1	CCW	SP	BALL	OPEN	1010312 1010526 1010928 1011095 1011097 1011409 1164280



CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
A171	1/25	115	3450	0.70	1	CCW	PSC	BALL	OPEN	1010491 1010527P 1011096 1011410

NEW**L.L. Building - OEM - Motors**

CAT. NO.	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	ENCLOSURE	DIAMETER	CAPACITOR INCLUDED	DIRECT REPLACEMENT FOR
99371M*	120	1050	2.80	1	CWSE	1/2" X 2.30"	3.08"	PSC	OPEN	5.12"	8MFD / 250VAC	V909371 V909336
99321M*	120	1050	3.30	1	CWSE	1/2" X 2.30"	3.33"	PSC	OPEN	5.12"	10MFD / 250VAC	V909321 V909337
99319M*	120	1050	3.50	1	CWSE	1/2" X 2.30"	3.33"	PSC	OPEN	5.12"	10MFD / 250VAC	V909319

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



Lennox - OEM - Draft Inducers

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	HERTZ	OVERLOAD	DIRECT REPLACEMENT FOR
AI38	1/70	120	3000	0.70	1	CCW	SP	SLEEVE	OPEN	60	AUTO	7021-8857 7021-8825



CAT. NO.	HP	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	HZ	OVERLOAD	DIRECT REPLACEMENT FOR
AI63	1/20	115	3400	1.80	1	CCW	SP	BALL	OPEN	60	AUTO	7021-9450 67K0401 67K0401P FB-RFB547 3671701 3671703 3671704



CAT. NO.	VOLTS	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	HZ	OVERLOAD	CAPACITOR REQUIRED	DIRECT REPLACEMENT FOR
A324	230	3200	0.44	1	CW	PSC	BALL	OPEN	60	AUTO	INCLUDED	28G6601 7062-1794



Loren Cook - OEM - Motors

CAT. NO.	WATTS	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	DIAMETER	MOUNT	DIRECT REPLACEMENT FOR
90220M*	1/114	1500	0.75	2	CWSE	3/8" X 2-3/4"	2-3/8"	SP	SLEEVE	44"	THRU BOLT	220/240
90420M*	1/23	1500	1.50	1	CWSE	3/8" X 2-3/4"	2-5/8"	SP	SLEEVE	44"	THRU BOLT	420
90320M*	1/16	1550	2.20	2	CWSE	3/8" X 2-1/2"	2-5/8"	SP	SLEEVE	44"	THRU BOLT	320/340
90520M*	1/16	1200	1.50	1	CWSE	3/8" X 2-1/4"	3"	PSC CAPACITOR INCLUDED	SLEEVE	5.12"	THRU BOLT	520
90620M*	1/11	1500	4.60	2	CWSE	1/2" X 6-1/4"	3"	SP	SLEEVE	44"	LUG MOUNT	620/640
90E2A	1/8	1600	1.70	1	CWSE	1/2" X 3"	3-1/2"	PSC	BALL	5.63"	STUD	006E2A
90720M*	1/4	1625	3.90	2	CWSE	1/2" X 6-1/4"	3-3/8"	PSC CAPACITOR INCLUDED	SLEEVE	5.12"	LUG MOUNT	720/740



NOTES:90E2A ENCLOSURE IS OAO

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW National Comfort - OEM - Motors

CAT. NO.	HP	RPM	AMPS	VOLTAGE	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
82038M*	1/4	1140	1.5	208-230	CCWSE	0.50"	4-3/8"	PSC	4-3/8"	OPEN	I4270038

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Reznor - Direct Replacements

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIAMETER	DIRECT REPLACEMENT FOR
66505M*	1/10	115/208/230	3000	140/0.80	I	REV.	5/16" X 3-1/4"	4-1/4"	PSC	BALL	OPEN	3.3"	CW175-40069 CCW505-43424 CCW175-40070 7162-0293 7162-0348 7162-0294 CCW7162-0311 CCW175-43846 CW7162-0224 CW36860

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

NEW Rheem - OEM - Draft Inducers

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	ENCLOSURE	TYPE	BEARINGS	DIAMETER	DIRECT REPLACEMENT FOR
A24I	1/25	208-230	3200	0.62	I	CW	OPEN	SP	SLEEVE	3.3"	70-23641-81
AI36	1/20	115	3450	0.75	I	CW	OPEN	PSC	SLEEVE	3.3"	7062-3861

NEW Rheem - OEM - Motors

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	DIAMETER	DIRECT REPLACEMENT FOR
80825M*	1/8	208-230	825	1.00	I	REV.	1/2" X 6-1/2"	4"	PSC	BALL	5-5/8"	21276-02 21276-01 512076-01

NEW Sterling - OEM - Motors

CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	BEARINGS	MOUNT	DIRECT REPLACEMENT FOR
90766M*	1/20	115	1650	1.9	I	CWSE	5/16" X 3"	2.68"	SLEEVE	STUD	J3I-04766
90872M*	1/12	115	1000	2.2	I	CWSE	3/8" X 3-1/2"	3.08"	SLEEVE	STUD	J3I-01872
90091M*	1/10	120	1000	2.6	I	CWSE	3/8" X 3"	2.58"	SLEEVE	STUD	J3I-04091



NEW Tradewinds - OEM - Motors

CAT. NO.	HP	VOLTAGE	RPM	AMPS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	DIAMETER	DIRECT REPLACEMENT FOR
82324M*	1/25	115	1550	2.10	CWLE	1-7/8" X 5/16" X 1-7/8"	3"	SP	SLEEVE	3.3"	19-09-215 324

NOTE: 1-1/8" HUBS



NEW York - OEM - Draft Inducers



CAT. NO.	HP	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
A225	1/15	115	3200	2.25	I	CW	SP	BALL	OPEN	024-34558-000 17503 7021-11577 7021-11830
A234	1/12	208-230	3200	0.5	I	CW	PSC	BALL	OPEN	026-39532-000 7062-5155 7062-5267

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



TITAN HD[®]



NEW

Motor Run Capacitors 370 VAC Single Section - Oval



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Made in USA
- 10 Year Warranty

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
POC3A	3	1.50"	2.00"	3.00"	50
POC4A	4	1.50"	1.90"	2.30"	50
POC5A	5	1.50"	2.63"	2.88"	50
POC12.5A	12.5	1.50"	2.25"	2.75"	50
POC25A	25	1.50"	2.25"	4.00"	50
POC30A	30	1.25"	2.25"	4.00"	50
POC45A	45	1.38"	2.25"	4.50"	50
POC80A	80	2.00"	3.00"	3.50"	50

NEW

Motor Run Capacitors 370 VAC Single Section - Round



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Approval certifications: UL, cUL, IEC 60252
- Made in USA
- 10 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
PRC5A	5	2.10"	3.25"	50
PRC7.5A	7.5	2.25"	3.25"	50
PRC15A	15	2.10"	3.10"	50
PRC20A	20	2.10"	3.25"	50
PRC25A	25	2.25"	3.25"	50
PRC30A	30	2.25"	3.25"	50
PRC35A	35	2.00"	4.00"	50
PRC40A	40	2.00"	4.00"	50
PRC45A	45	2.10"	3.88"	50
PRC50A	50	2.10"	4.50"	50
PRC55A	55	2.00"	4.50"	50
PRC60A	60	2.10"	4.50"	50
PRC70A	70	2.25"	4.50"	50
PRC80A	80	2.00"	4.50"	50
PRC100A	100	2.88"	3.60"	50

Motor Run Capacitors 370/440 VAC Single Section - Oval



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Approval certifications: UL, cUL, IEC 60252
- Made in USA
- 10 Year Warranty



CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
POCF4A	4	1.50"	2.00"	3.00"	
POCF5A	5	1.25"	2.00"	1.58"	50
POCF7.5A	7.5	1.25"	2.00"	2.19"	50
POCF10A	10	1.25"	2.00"	2.88"	50
POCF12.5A	12.5	1.25"	2.00"	2.88"	50
POCF15A	15	1.25"	2.00"	2.88"	50
POCF20A	20	1.25"	2.00"	2.88"	50
POCF25B	25	1.25"	2.00"	2.88"	50
POCF30A	30	1.25"	2.00"	3.88"	50
POCF35A	35	1.25"	2.00"	3.88"	50
POCF40A	40	1.75"	2.75"	2.91"	50
POCF45A	45	1.75"	2.75"	2.91"	50
POCF50A	50	1.75"	2.75"	2.91"	50
POCF60A	60	1.75"	2.75"	3.91"	50
POCF70A	70	1.75"	2.75"	3.91"	50
POCF80A	80	1.75"	2.75"	3.91"	50

NEW

Motor Run Capacitors 370/440 VAC Single Section - Round



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Made in USA
- 10 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
PRCF15A	15	2.10"	3.25"	50
PRCF20A	20	2.25"	3.25"	50
PRCF25A	25	2.25"	4.00"	50
PRCF30A	30	2.10"	4.00"	50
PRCF45A	45	2.25"	4.75"	50
PRCF60A	60	2.25"	4.75"	50
PRCF70A	70	2.25"	6.00"	50
PRCF90A	90	2.75"	4.50"	50

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW

Motor Run Capacitors 370 VAC Dual Section - Round

- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Made in USA
- 10 Year Warranty



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
PRCD355A	35+5	2.10"	4.00"	50
PRCD405A	40+5	2.25"	4.00"	50
PRCD455A	45+5	2.25"	4.00"	50
PRCD505A	50+5	2.10"	4.00"	50
PRCD555A	55+5	2.25"	4.75"	50

NEW

Motor Run Capacitors 370 VAC Dual Section - Oval



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Made in USA
- 10 Year Warranty

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
POCD1010A	10+10	2.00"	3.00"	3.50"	50

Motor Run Capacitors 70/440 VAC Dual Section - Round

- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Approval certifications: UL, cUL, IEC 60252
- Made in USA
- 10 Year Warranty



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
PRCFD255A	25+5	2.00"	2.91"	50
PRCFD305A	30+5	2.00"	2.91"	50
PRCFD3075A	30+7.5	2.00"	2.91"	50
PRCFD355A	35+5	2.00"	3.84"	50
PRCFD3575A	35+7.5	2.00"	3.84"	50
PRCFD405A	40+5	2.00"	3.84"	50
PRCFD4075A	40+7.5	2.00"	3.84"	50
PRCFD455A	45+5	2.00"	3.84"	50
PRCFD4575A	45+7.5	2.00"	3.84"	50
PRCFD505A	50+5	2.00"	3.84"	50
PRCFD5075A	50+7.5	2.00"	3.84"	50
PRCFD555A	55+5	2.75"	2.50"	50
NEW PRCFD5575A	55+7.5	2.50"	2.91"	50
PRCFD605A	60+5	2.50"	2.91"	50
PRCFD6075A	60+7.5	2.50"	2.91"	50
NEW PRCFD705A	70+5	2.625"	4.625"	50
NEW PRCFD7075A	70+7.5	2.50"	4.50"	50
NEW PRCFD7010A	70+10	2.625"	4.625"	50
PRCFD805A	80+5	2.50"	3.91"	50
NEW PRCFD8075A	80+7.5	2.50"	4.625"	50

TITAN PRO[®]



Motor Run Capacitors 370/440 VAC Dual Section - Round



- 370/440 VAC
- Continuous run
- Dual Capacitance
- Round Metal can
- Designed for continuous run
- 5 Year Warranty

Motor Run Capacitors 370/440 VAC Single Section - Round



- 370/440 VAC
- Continuous run
- Single capacitance
- Round Metal Can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TRCFD205	20+5	1.97"	3.74"	50
TRCFD2015	20+15	1.97"	3.94"	50
TRCFD255	25+5	1.97"	3.54"	50
TRCFD2575	25+7.5	1.97"	3.74"	50
TRCFD2515	25+15	1.97"	4.33"	50
TRCFD303	30+3	1.97"	4.33"	50
TRCFD305	30+5	1.97"	3.94"	50
TRCFD3075	30+7.5	1.97"	4.13"	50
TRCFD353	35+3	2.50"	3.74"	50
TRCFD354	35+4	1.97"	4.53"	50
TRCFD355	35+5	1.97"	4.13"	50
TRCFD3575	35+7.5	2.36"	3.54"	50
TRCFD403	40+3	2.50"	3.74"	50
TRCFD405	40+5	2.36"	3.54"	50
TRCFD4075	40+7.5	2.50"	3.74"	50
TRCFD453	45+3	2.50"	3.74"	50
TRCFD455	45+5	2.50"	3.74"	50
TRCFD4575	45+7.5	2.50"	3.74"	50
TRCFD4510	45+10	2.50"	3.74"	50
TRCFD503	50+3	2.50"	3.74"	50
TRCFD505	50+5	2.50"	3.74"	50
TRCFD5075	50+7.5	2.50"	3.74"	50
TRCFD50125	50+12.5	2.50"	3.74"	50
TRCFD553	55+3	2.50"	3.74"	50
TRCFD555	55+5	2.50"	3.74"	50
TRCFD5575	55+7.5	2.50"	3.74"	50
TRCFD603	60+3	2.50"	3.74"	50
TRCFD605	60+5	2.50"	3.74"	50
TRCFD6075	60+7.5	2.50"	3.74"	50
TRCFD6010	60+10	2.50"	3.74"	50
TRCFD705	70+5	2.50"	3.74"	50
TRCFD7075	70+7.5	2.50"	3.74"	50
TRCFD805	*80+5	2.50"	3.74"	50
TRCFD8075	80+7.5	2.50"	3.74"	50
TRCFD8010	80+10	2.50"	3.74"	50

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TRCF3	3	1.77"	2.17"	100
TRCF5	5	1.77"	2.17"	100
TRCF6	6	1.77"	2.17"	100
TRCF7.5	7.5	1.77"	2.17"	100
TRCF10	10	1.77"	2.17"	100
TRCF12.5	12.5	1.77"	2.17"	100
TRCF15	15	1.77"	2.56"	100
TRCF17.5	17.5	1.77"	2.76"	100
TRCF20	20	1.77"	2.95"	100
TRCF25	25	1.97"	2.95"	100
TRCF30	30	1.97"	3.35"	100
TRCF35	35	1.97"	3.54"	50
TRCF40	40	1.97"	3.94"	100
TRCF45	45	1.97"	4.33"	50
TRCF50	50	1.97"	4.72"	50
TRCF55	55	1.97"	4.92"	50
TRCF60	60	2.17"	4.53"	50
TRCF70	70	2.17"	4.92"	100
TRCF80	80	2.50"	4.72"	50
TRCF100	110	2.50"	5.31"	50

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Motor Run Capacitors 370/440 VAC Single Section - Oval



- 370/440 VAC
- Continuous run
- Single capacitance
- Oval Metal Can
- 5 Year Warranty

Motor Run Capacitors 370/440 VAC Dual Section - Oval



- 370 & 440 VAC
- Continuous run
- Dual capacitance
- Oval Metal can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
TOCF3	3	1.24"	2.03"	2.17"	100
TOCF4	4	1.24"	2.03"	2.17"	100
TOCF5	5	1.24"	2.03"	2.17"	100
TOCF6	6	1.24"	2.03"	2.56"	100
TOCF7.5	7.5	1.24"	2.03"	2.17"	100
TOCF10	10	1.24"	2.03"	2.56"	100
TOCF12.5	12.5	1.24"	2.03"	2.95"	100
TOCF15	15	1.24"	2.03"	2.95"	100
TOCF17.5	17.5	1.24"	2.03"	3.74"	100
TOCF20	20	1.77"	2.80"	2.68"	100
TOCF25	25	1.77"	2.80"	3.07"	100
TOCF30	30	1.77"	2.80"	3.46"	50
TOCF35	35	1.77"	2.80"	3.86"	50
TOCF40	40	1.77"	2.80"	4.06"	50
TOCF45	45	1.77"	2.80"	4.45"	50
TOCF50	50	1.77"	2.80"	4.84"	50
 TOCF60	60	1.80"	3.00"	5.75"	50

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
TOCFD154	15+4	1.77"	2.68"	2.68"	50
TOCFD155	15+5	1.77"	2.68"	2.68"	50
TOCFD2015	20+15	1.77"	2.80"	3.86"	50
TOCFD255	25+5	1.77"	2.80"	3.46"	50
TOCFD257.5	25+7.5	1.77"	2.80"	3.46"	50
TOCFD2510	25+10	1.77"	2.80"	3.86"	50
TOCFD304	30+4	1.77"	2.80"	3.86"	50
TOCFD305	30+5	1.77"	2.80"	3.86"	50
TOCFD307.5	30+7.5	1.77"	2.80"	3.86"	50
TOCFD353	35+3	1.77"	2.80"	4.25"	50
TOCFD354	35+4	1.77"	2.80"	4.25"	50
TOCFD355	35+5	1.77"	2.80"	4.25"	50
TOCFD357.5	35+7.5	1.77"	2.80"	4.25"	50
TOCFD405	40+5	1.77"	2.80"	4.65"	50
TOCFD407.5	40+7.5	1.87"	3.54"	3.78"	50
TOCFD455	45+5	1.77"	2.80"	5.04"	50
TOCFD505	50+5	1.87"	3.54"	4.37"	50
TOCFD555	55+5	1.87"	3.54"	4.57"	50
TOCFD5510	55+10	1.87"	3.54"	5.16"	50
TOCFD605	60+5	1.87"	3.54"	5.55"	50

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW

Motor Run Capacitors 370 VAC Single Section - Round



- 370 VAC
- Continuous run
- Single capacitance
- Round Metal Can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
TRC5	5	2.00"	2.88"	100
TRC7.5	7.5	1.77"	2.17"	100
TRC10	10	2.00"	2.90"	100
TRC15	15	2.00"	3.50"	100
TRC25	25	2.00"	3.50"	100
TRC30	30	2.10"	3.00"	100
TRC35	35	2.13"	3.50"	100
TRC40	40	2.00"	4.00"	100
TRC45	45	2.25"	4.25"	50
TRC50	50	2.10"	4.50"	50
TRC55	55	2.10"	4.50"	50
TRC60	60	1.97"	4.33"	50
TRC65	65	2.10"	5.00"	50
TRC80	80	2.25"	6.00"	50
TRC100	100	2.75"	5.00"	50

NEW

Motor Run Capacitors 370 VAC Single Section - Oval



- 370 VAC
- Continuous run
- Single capacitance
- Oval Metal Can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
TOC4	4	1.50"	2.25"	3.00"	100
TOC6	6	1.40"	2.20"	2.75"	100
TOC7.5	7.5	1.75"	2.25"	2.75"	100
TOC10	10	1.30"	2.10"	3.25"	100
TOC12.5	12.5	1.45"	2.25"	3.75"	100
TOC15	15	1.50"	2.25"	3.50"	100
TOC20	20	1.75"	3.00"	3.25"	100

NEW

Motor Run Capacitors 370 VAC Dual Section - Round



- 370 VAC
- Continuous run
- Single capacitance
- Round Metal Can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
TRCD455	45+5	2.10"	4.63"	50
TRCD7010	70+10	2.65"	5.25"	50

NEW Packard Dry AC Motor Run Capacitors 370 VAC



- Commonly used on motors in fans, pumps and blowers
- Constructed with Self-Healing Dielectric Metalized Polypropylene Film
- 1/4 inch blade quick connect terminals; Metal tab mounting bracket
- Capacitance tolerance: +/-5%
- Plastic ABS case
- RoHS compliant
- 2 Blade Quick Connect Terminals
- Operating temperature range: -40°C to 85°C (-40°F to 185°F)

CAT. NO.	HERTZ	UF	DIMENSIONS			CASE QTY
			DEPTH	WIDTH	HEIGHT	
PDC2.2	50/60	2.2	1.50"	1.50"	1.75"	200
PDC10	50/60	10	1.25"	2.36"	2.44"	200
PDC12.5	50/60	12.5	1.25"	2.36"	2.44"	100

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Motor Start Capacitors 330 VAC



- Start Motor Capacitor
- 330 VAC
- 50/60 Hertz
- Standard Blade Terminals
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TRMJ21	21-25	1-7/16"	3-3/8"	100
TRMJ25	25-30	1-7/16"	3-3/8"	100
TRMJ30	30-36	1-7/16"	3-3/8"	100
TRMJ36	36-43	1-7/16"	3-3/8"	50
TRMJ43	43-53	1-13/16"	3-3/8"	50
TRMJ56	53-64	1-13/16"	3-3/8"	50
TRMJ64	64-77	1-13/16"	3-3/8"	50
TRMJ72	72-88	1-13/16"	3-3/8"	50
TRMJ88	88-108	2-1/16"	3-3/8"	50
TRMJ108	108-130	2-1/16"	4-3/8"	50
TRMJ124	124-149	2-1/16"	4-3/8"	50
TRMJ161	161-193	2-1/16"	4-3/8"	50
TRMJ189	189-227	2-1/16"	4-3/8"	50
TRMJ216	216-259	2-9/16"	4-3/8"	25
TRMJ270	270-324	2-9/16"	4-3/8"	25

Motor Start Capacitors 110/125 VAC



- Dry Electrolytic Non Polarized Capacitor
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour
- 110-125 VAC

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TMJ25	25-30	1-7/16"	2-3/4"	100
TMJ30	30-36	1-7/16"	2-3/4"	100
TMJ36	36-43	1-7/16"	2-3/4"	100
TMJ43	43-53	1-7/16"	2-3/4"	100
TMJ64	64-77	1-7/16"	2-3/4"	100
TMJ72	72-88	1-7/16"	2-3/4"	100
TMJ88	88-108	1-7/16"	2-3/4"	100
TMJ108	108-130	1-7/16"	2-3/4"	100
TMJ124	124-149	1-7/16"	2-3/4"	100
TMJ130	130-156	1-7/16"	2-3/4"	100
TMJ145	145-174	1-7/16"	2-3/4"	100
TMJ161	161-193	1-7/16"	2-3/4"	100
TMJ189	189-227	1-7/16"	2-3/4"	100
TMJ200	200-240	1-7/16"	2-3/4"	100
TMJ216	216-259	1-7/16"	2-3/4"	100
TMJ233	233-280	1-7/16"	2-3/4"	100
TMJ243	243-292	1-7/16"	2-3/4"	100
TMJ270	270-324	1-7/16"	2-3/4"	100
TMJ295	295-354	1-7/16"	2-3/4"	100
TMJ300	300-360	1-7/16"	4-3/8"	100
TMJ324	324-388	1-7/16"	2-3/4"	100
TMJ340	340-408	1-7/16"	3-3/8"	100
TMJ378A	378-455	1-13/16"	3-3/8"	50
TMJ400	400-480	1-7/16"	3-3/8"	100
TMJ430	430-516	1-7/16"	3-3/8"	100
TMJ460	460-552	1-7/16"	3-3/8"	100
TMJ540A	540-648	1-13/16"	3-3/8"	50
TMJ590A	590-708	1-13/16"	3-3/8"	50
TMJ645	645-774	1-13/16"	4-3/8"	50
TMJ708	708-850	1-13/16"	4-3/8"	50
NEW TMJ708A	708-850	2.20"	4.50"	50
NEW TMJ800	800-960	1.90"	3.50"	50
TMJ829	829-995	1-13/16"	4-3/8"	50
NEW TMJ829A	829-995	2.10"	4.50"	50
NEW TMJ860	860-1032	2.00"	3.50"	50

TITAN PRO[®] 5YR WARRANTY

NEW

Motor Start Capacitors 330 VAC



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
TRMJ08R	108-130	2.15"	4.50"	50
TRMJ130	130-158	2.00"	4.50"	50
TRMJ145	145-174	2.15"	4.60"	50
TRMJ216A	216-259	2.20"	4.50"	50
TRMJ243	243-292	2.25"	3.50"	50
TRMJ300	300-360	2.72"	4.50"	25

NEW

Motor Start Capacitors 220/250 VAC



- Dry Electrolytic Non Polarized Capacitor
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour
- 220-250 VAC



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
TTMJ59	59-71	2.00"	3.00"	50
TTMJ45A	145-174	2.20"	3.50"	50
TTMJ233A	233-280	2.04"	4.37"	50
TTMJ270A	270-324	2.25"	4.50"	50
TTMJ400A	400-480	2.75"	4.50"	50

NEW

Motor Start Capacitors 165 VAC



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
TSMJ08	108-130	1.50"	2.90"	100
TSMJ161	161-193	1.50"	3.50"	100
TSMJ189	189-227	1.50"	3.50"	100
TSMJ216	216-259	1.80"	3.50"	50
TSMJ243	243-292	2.00"	3.50"	50
TSMJ540	540-648	1.80"	3.50"	50
TSMJ810A	810-972	2.00"	4.50"	50

Motor Start Capacitors 220/250 VAC



- Dry Electrolytic Non Polarized Capacitor
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour
- 220-250 VAC



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TTMJ21	21-25	1-7/16"	2-3/4"	100
TTMJ25	25-30	1-7/16"	2-3/4"	100
TTMJ30	30-36	1-7/16"	2-3/4"	100
TTMJ36	36-43	1-7/16"	2-3/4"	100
TTMJ43	43-53	1-7/16"	2-3/4"	50
TTMJ53	53-64	1-7/16"	3-3/8"	100
TTMJ64	64-77	1-7/16"	2-3/4"	100
TTMJ72	72-88	1-13/16"	3-3/8"	50
TTMJ88	88-108	1-13/16"	3-3/8"	50
TTMJ108	108-130	1-13/16"	3-3/8"	50
TTMJ124	124-149	1-13/16"	4-3/8"	50
TTMJ145	145-174	1-13/16"	3-3/8"	50
NEW TTMJ161	161-193	2.04"	3.38"	50
TTMJ189	189-227	2-1/16"	4-3/8"	50
TTMJ216	216-259	2-1/16"	3-3/8"	50
TTMJ243	243-292	2-1/16"	3-3/8"	50
TTMJ270	270-324	2-1/16"	3-3/8"	50
TTMJ320	320-384	2-1/16"	4-3/8"	50
TTMJ378	378-455	2-9/16"	4-3/8"	50
TTMJ400	400-480	2-1/16"	4-3/8"	50
NEW TTMJ430	430-516	2.60"	4.50"	50

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

WWW.MORRISPRODUCTS.COM

1-888-777-6678



RK5 Dual Element Fuses – 250V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLNR001T	1 AMP	10	10
FLNR002T	2 AMP	10	10
FLNR003T	3 AMP	10	10
FLNR03.2T	3.2 AMP	10	10
FLNR005T	5 AMP	10	10
FLNR006T	6 AMP	10	10
FLNR6.25T	6.25 AMP	10	10
FLNR008T	8 AMP	10	10
FLNR012T	12 AMP	10	10
FLNR015T	15 AMP	10	10
FLNR020T	20 AMP	10	10
FLNR025T	25 AMP	10	10
FLNR030T	30 AMP	10	10
FLNR035T	35 AMP	10	10
FLNR040T	40 AMP	10	10
FLNR045T	45 AMP	10	10
FLNR050T	50 AMP	10	10
FLNR060T	60 AMP	10	10
FLNR070V	70 AMP	5	5
FLNR080V	80 AMP	5	5
FLNR090V	90 AMP	5	5
FLNR100V	100 AMP	5	5
FLNR125X	125 AMP	EA	1
FLNR150X	150 AMP	EA	1
FLNR0175X	175 AMP	EA	1
FLNR200X	200 AMP	EA	1



- Provides motor overload, ground fault and short-circuit protection
- Class RK5; 250 VAC
- Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current (8 seconds for fuses 30A or less)
- Interrupting Rating 200,000 Amps RMS.Sym.
- UL Listed



RK5 Time Delay Fuses – 600V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLSR01.5T	1.5 AMP	10	10
FLSR005T	5 AMP	10	10
FLSR006T	6 AMP	10	10
FLSR010T	10 AMP	10	10
FLSR012T	12 AMP	10	10
FLSR015T	15 AMP	10	10
FLSR020T	20 AMP	10	10
FLSR025T	25 AMP	10	10
FLSR030T	30 AMP	10	10
FLSR035T	35 AMP	10	10
FLSR040T	40 AMP	10	10
FLSR045T	45 AMP	10	10
FLSR050T	50 AMP	10	10
FLSR060T	60 AMP	10	10
FLSR070V	70 AMP	5	5
FLSR080V	80 AMP	5	5
FLSR090V	90 AMP	5	5
FLSR100V	100 AMP	5	5
FLSR125X	125 AMP	1	1
FLSR150X	150 AMP	1	1
FLSR175X	175 AMP	1	1
FLSR200X	200 AMP	1	1
FLSR400X	400 AMP	1	1



- Class RK5; 600 VAC
- Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current (8 seconds for fuses 30A or less)
- Interrupting Rating 200,000 Amps. RMS.Sym.
- UL Listed

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Class G Time Delay Fuses



- General purpose for use in 120/208 and 277/480 circuits. Ideal for fluorescent fixture protection
- Light inductive loads including motors, solenoids, etc. (For additional delay, refer to Edison EDCC or JDL)
- Branch circuit rated for 480 VAC
- 100,000 RMS Sym Amps
- Compact size features varying length rejection feature
- Time-delay of 12 sec. min. at 200% for amp sizes 6 through 60

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
SLC002T	3 AMP	10	10
SLC003T	3 AMP	10	10
SLC005T	5 AMP	10	10
SLC006T	6 AMP	10	10
SLC010T	10 AMP	10	10
SLC015T	15 AMP	10	10
SLC020T	20 AMP	10	10
SLC025T	25 AMP	10	10
SLC030T	30 AMP	10	10
SLC035T	35 AMP	10	10
SLC040T	40 AMP	10	10
SLC060T	60 AMP	10	10

Class J Time Delay Fuses - 600V



- Dual-Element, Time-Delay - 10 seconds (minimum) at 500% rated current
- True dual-element fuses with a minimum 10 second time-delay at 500% overload
- High interrupting rating to safely interrupt overcurrents up to 300kA
- High degree of current limitation due to the fast speed-of-response to short-circuits
- Reduces let-through thermal and magnetic forces in order to protect low withstand rated components
- Proper sizing provides "No Damage" Type "2" coordinated protection for NEMA and IEC motor control in accordance with IEC Standard 947-4-1

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
JTD010T	10 AMP	10	10
JTD015T	15 AMP	10	10
JTD020T	20 AMP	10	10
JTD025T	25 AMP	10	10
JTD030T	30 AMP	10	10
JTD035T	35 AMP	10	10
JTD040T	40 AMP	10	10
JTD045T	45 AMP	10	10
JTD050T	50 AMP	10	10
JTD060T	60 AMP	10	10
JTD070V	70 AMP	5	5
JTD080V	80 AMP	5	5
JTD100T	100 AMP	5	5

Class CC Fast Acting Fuses - 600V



- Fast-acting fuse
- Rejection type; for both standard holders or those which reject other type fuses
- UL Listed

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLKR001T	1 AMP	10	10
KLKR002T	2 AMP	10	10
KLKR003T	3 AMP	10	10
KLKR004T	4 AMP	10	10
KLKR005T	5 AMP	10	10
KLKR006T	6 AMP	10	10
KLKR008T	8 AMP	10	10
KLKR010T	10 AMP	10	10
KLKR015T	15 AMP	10	10
KLKR020T	20 AMP	10	10
KLKR025T	25 AMP	10	10
KLKR030T	30 AMP	10	10



Class CC Fuses - 600V - Branch Circuits

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
CCMR.250TXP	0.25 AMP	10	10
CCMR.500TXP	0.50 AMP	10	10
CCMR.600TXP	0.60 AMP	10	10
CCMR.800TXP	0.80 AMP	10	10
CCMR001TXP	1 AMP	10	10
CCMR1.25TXP	1.25 AMP	10	10
CCMR002TXP	2 AMP	10	10
CCMR2.25TXP	2.25 AMP	10	10
CCMR003TXP	3 AMP	10	10
CCMR004TXP	4 AMP	10	10
CCMR005TXP	5 AMP	10	10
CCMR006TXP	6 AMP	10	10
CCMR6.25TXP	6.25 AMP	10	10
CCMR007TXP	7 AMP	10	10
CCMR075TXP	75 AMP	10	10
CCMR008TXP	8 AMP	10	10
CCMR101TXP	10 AMP	10	10
CCMR012TXP	12 AMP	10	10
CCMR015TXP	15 AMP	10	10
CCMR020TXP	20 AMP	10	10
CCMR025TXP	25 AMP	10	10
CCMR030TXP	30 AMP	10	10
CCMR035T	35 AMP	10	10
CCMR040T	40 AMP	10	10
CCMR050TXP	50 AMP	10	10

- A superior all-purpose, space-saving control/branch circuit fuse that meets most protection requirements up to 30 amps
- Can be used where either a time-delay or a fast-acting fuse is needed
- Maximum 200kA interrupting rating for available fault current in today's large capacity systems
- Time-delay to avoid unwanted fuse openings from surge currents
- Superior Motor Protection for small horsepower motor circuits.
- For high inrush time-delay applications
- UL Listed



Class CC Time Delay Fuses - 600V - Control Circuits

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLDR.200TXP	0.20 AMP	10	10
KLDR.500TXP	0.50 AMP	10	10
KLDR.800TXP	0.80 AMP	10	10
KLDR001TXP	1 AMP	10	10
KLDR002TXP	2 AMP	10	10
KLDR003TXP	3 AMP	10	10
KLDR004TXP	4 AMP	10	10
KLDR005TXP	5 AMP	10	10
KLDR006TXP	6 AMP	10	10
KLDR007TXP	7 AMP	10	10
KLDR008TXP	8 AMP	10	10
KLDR010TXP	10 AMP	10	10
KLDR012TXP	12 AMP	10	10
KLDR015TXP	15 AMP	10	10
KLDR020TXP	20 AMP	10	10
KLDR025TXP	25 AMP	10	10
KLDR030TXP	30 AMP	10	10

- For control circuit transformer protection
- For high inrush time-delay applications
- UL Listed



IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Class K5 - One Time Fuses - 250V



- Very Economical
- 50kA Interrupting Rating
- Non-Indicating
- For General Purpose Use
- UL Listed

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
NLN010	10 AMP	10	10
NLN012	12 AMP	10	10
NLN015	15 AMP	10	10
NLN020	20 AMP	10	10
NLN025	25 AMP	10	10
NLN030	30 AMP	10	10
NLN035	35 AMP	10	10
NLN040	40 AMP	10	10
NLN045	45 AMP	10	10
NLN050	50 AMP	10	10
NLN060	60 AMP	5	5
NLN070	70 AMP	5	5
NLN080	80 AMP	5	5
NLN090	90 AMP	5	5
NLN100	100 AMP	5	5

Class K5 - One Time Fuses - 600V



- Economical
- 50kA Interrupting Rating
- Non-Indicating
- For General Purpose Use
- UL Listed

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
NLS010T	10 AMP	10	10
NLS015T	15 AMP	10	10
NLS020T	20 AMP	10	10
NLS030T	30 AMP	10	10

Class T - Fast Acting Fuses - 300V



- Fast Acting
- The Most Compact Fuses Available with Ratings Above 30 Amps
- Current Limiting Design Reduces Damage Caused by Heating and Magnetic Effects.
- Provides Protection of Individual Electric Services and Motors
- UL Listed

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
JLLN100V	100 AMP	10	10
JLLN200P	200 AMP	10	10

Class T - Fast Acting Fuses - 600V



- Fast Acting
- Compact
- More Space Efficient than 3-Pole Class T Fuses
- Current Limiting Design Reduces Damage Caused by Heating and Magnetic Effects.
- Used for Variable Speed Drives, Power Conversion, Compact Main Switches.
- UL Listed

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
JLLS010T	10 AMP	10	10
JLLS015T	15 AMP	10	10
JLLS020T	20 AMP	10	10
JLLS025T	25 AMP	10	10
JLLS030T	30 AMP	10	10
JLLS035T	35 AMP	10	10
JLLS040T	40 AMP	10	10
JLLS045T	45 AMP	10	10
JLLS050T	50 AMP	10	10
JLLS060T	60 AMP	10	10
JLLS080T	80 AMP	5	5
JLLS600X	600 AMP	1	1

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



Midget Fast Acting Fuses - 600V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLK002	2 AMP	10	10
KLK003	3 AMP	10	10
KLK03.5T	3.5 AMP	10	10
KLK010	10 AMP	10	10
KLK015	15 AMP	10	10

- Use with street lighting holders, HID lighting, control circuits, electronic equipment protection
- Compact dimensions
- Interrupting Rating: 100kA RMS Amps
- Fast-acting design responds quickly to both overloads and short-circuit current
- UL Listed



CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
BLS001T	1 AMP	10	10
BLS002T	2 AMP	10	10
BLS003T	3 AMP	10	10
BLS005T	5 AMP	10	10

- 10x35mm
- Fast Acting
- Ensures Reliable Overcurrent Protection
- Used for Street Lighting, Meeting, Electronic Circuits
- UL Listed



CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLKD.500T	0.50 AMP	10	10
KLKDOI.5T	1.5 AMP	10	10
KLKDO05T	5 AMP	10	10
KLKDOI0T	10 AMP	10	10
KLKDOI5T	15 AMP	10	10
KLKDO20T	20 AMP	10	10
KLKDO30T	30 AMP	10	10

- Midget Fuse
- 10x38mm Size
- Fast Acting
- Ensures Quality Backup Overcurrent Protection
- Used for Solar, Combiner Boxes, Inverters, Power Supplies
- UL Listed



Midget Time Delay Fuses - 500V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLQ001T	1 AMP	10	10
FLQ002T	2 AMP	10	10
FLQ003T	3 AMP	10	10
FLQ004T	4 AMP	10	10
FLQ005T	5 AMP	10	10
FLQ007T	7 AMP	10	10
FLQ010T	10 AMP	10	10
FLQ015T	15 AMP	10	10
FLQ020T	20 AMP	10	10
FLQ025T	25 AMP	10	10
FLQ030T	30 AMP	10	10

- Supplemental protection of transformers, solenoids, and other high inrush circuits
- Interrupting Rating: 10kA RMS Amps
- Compact dimensions
- Fiber tube construction
- Time-delay allows harmless inductive surges to pass without needless fuse opening
- UL Listed



Midget Time Delay Fuses - 250V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLM001T	1 AMP	10	10
FLM002T	2 AMP	10	10
FLM003T	3 AMP	10	10
FLM005T	5 AMP	10	10
FLM010T	10 AMP	10	10
FLM015T	15 AMP	10	10
FLM020T	20 AMP	10	10
FLM025T	25 AMP	10	10
FLM030T	30 AMP	10	10

- Supplemental protection of small motors, transformers, solenoids, and other high inrush power electronic circuits
- Compact dimensions
- Fiber tube construction
- Interrupting Rating: 10kA RMS Amps @125V
- Dual-element construction allows harmless inductive surges to pass without opening
- UL Listed



IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Blade (Auto) Fuses 32V



CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE	ORDER MULTIPLE
AT0003V	3 AMP	10	10	10
AT0004V	4 AMP	10	10	10
AT0005V	5 AMP	10	10	10
AT007.5V	7.5 AMP	10	10	10
AT0010V	10 AMP	10	10	10
AT015V	15 AMP	10	10	10
AT0020V	20 AMP	10	10	10
AT0030V	30 AMP	10	10	10

Box Cover Units

- Maximum Amps: 15
- Maximum AC voltage of 125
- Designed for use with the Type T plug fuses
- UL Listed



620-608

CAT. NO.	DESCRIPTION	BOX QTY
620-6081	PLUG FUSE BASE ONLY (ESOU)	50
620-6082	RECEPTACLE/FUSE COMBO (ESRU)	60
620-6083	SWITCH/FUSE COMBO SQUARE (ESSY)	50

Fuse Pullers



626-38071



626-38073

CAT. NO.	DESCRIPTION	CASE QTY
626-38071	FOR FUSE SIZES 1/4" TO 1/2"	1
626-38073	FOR FUSE SIZES 1" TO 1-3/4"	1

Fuse Adapters



626-38632



626-ESA15

- Fuse adapters are used to retrofit fuses into existing installations
- Class H/S
- UL & CSA Listed

CAT. NO.	DESCRIPTION	BOX QTY	ORDER MULTIPLE
626-38632	60 TO 30 REDUCER FOR CLASS H, 250V	10	1
626-38636	60 TO 30 REDUCER FOR CLASS H, 600V	10	1
626-ESA15	15 AMP TYPE S FUSES	4	4
626-ESA20	20 AMP TYPE S FUSES	4	4

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



Fuseblocks - Class CC

- DIN Rail Mountable
- Space Saving Design
- Designed to Help to Prevent Insertion of Incorrect Fuses
- Made with High Strength Materials
- UL Listed



CAT. NO.	DESCRIPTION	CASE QTY
L60030C2C	2 POLE BOX LUG CLASS CC, 600V	1



Fuseblocks - Class R

- DIN Rail Mountable
- Space Saving Design
- Designed to Help to Prevent Insertion of Incorrect Fuses
- Made with High Strength Materials
- UL Listed



CAT. NO.	DESCRIPTION	CASE QTY
250V		
LFR250302C	2 POLE CLASS R 250V 30A	1
LFR250303C	3 POLE CLASS R 250V 30A	1
LFR250603CID	3 POLE CLASS R 250V 60A	1
600V		
LFR600302CID	2 POLE CLASS R 600V 30A	1
LFR600303CID	3 POLE CLASS R 600V 30A	1
LFR600603CID	3 POLE CLASS R 600V 60A	1
LFR601003CID	3 POLE CLASS R 600V 100A	1



Power Distribution Block

- Designed for HVAC and Elevator Systems
- Offer a Safe Way of Splicing Cables
- UL Listed



CAT. NO.	POLES	CASE QTY
LD14401Z	1	1
LFD25703Z	3	1

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Mini-Split Installation Kits



FIG. 1

FIG. 2

- Kits Include: Disconnect, Surge Protection, Liquid Tight Whip, Drain Line Fitting, & Wall Sleeves
- 60 Amp Fused and Non-Fused Disconnects
- Side Opening Disconnects
- 180° Access with Wide Opening Door
- Disconnect is NEMA Type 3R Rated for Rain and Sleet Resistance
- Heavy Duty Metal Shell
- Pre-Wired Whip comes with Fittings Pre-Installed

CAT. NO.	FIG.	DISCONNECT TYPE	DISCONNECT AMPS	FUSIBLE	WHIP SIZE
MSK003-6	1	DDS-60U	60	NO	3/4" X 6'
MSK003F-6	2	DDS-60	60	YES	3/4" X 6'
MSK012-6	1	DDS-60U	60	NO	1/2" X 6'

Universal Round Hot Surface Igniter Kit



- More Durable than Carbon
- Universal

CAT. NO.	VOLTAGE	MATERIAL	CASE QTY
1G100N	120	SILICON NITRIDE	40
1G80V	80	SILICON NITRIDE	40

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



Liquid Tight Flexible Conduit

- Type B Non-metallic liquidtight conduit
- For outside, inside and industrial uses
- Motor & Controls Installations
- HVAC Applications
- Power Distribution to Equipment
- Machine Tool Applications
- Transformer Terminations
- Outdoor lighting Applications
- Joins with metallic or non-metallic connectors
- 176° (80°C) Rated
- U.L. and C.U.L. Listed
- Non-conductive and non-corrosive
- Lightweight for easy handling, transportation, and installation
- Resistant to oil, acid, ozone, and alkaline
- Crush, abrasion, and strain resistant
- Smooth interior ideal for pulling cable
- Easy to cut into lengths, no jagged edges
- Maintains internal I.D. even in tight radius bends
- UL Listed for use as indicated in Article 351 of the 1987 NEC and Section 12-1300 of the 2002 Canadian Electrical Code, Part I
- UL Listed for outdoor use
- UV resistant



750-12100

CAT. NO.	DESCRIPTION	CASE QTY
750-12100	1/2" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-12100BOX	1/2" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL IN BOX	1
750-121000*	1/2" X 1000' LIQUID TITE CONDUIT - NON-METALLIC, 1000' PER ROLL	1
750-34100	3/4" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-34800*	3/4" X 800' LIQUID TITE CONDUIT - NON-METALLIC, 800' PER ROLL	1
750-10100	1" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-10500*	1" X 500' LIQUID TITE CONDUIT - NON-METALLIC 500' PER ROLL	1
750-125100	1-1/4" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-1550	1-1/2" X 50' LIQUID TITE CONDUIT - NON-METALLIC, 50' PER ROLL	1
750-2050*	2" X 50' LIQUID TITE CONDUIT - NON-METALLIC, 50' PER ROLL	1

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed



DiversiWhips

- Liquid tight flexible conduit system
- A labor saving convenience kit for A/C unit hookup
- Also use for heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting
- Three distinct wire colors for ease of hook up
- One (1) straight and one (1) 90° metallic or non-metallic connector
- 90° connector is removable for straight connections.
- (Second straight connector not included.)
- U.L. and C.U.L. Listed
- Bagged for Pegboard Display Hanging



6-12-4

CAT. NO.	DESCRIPTION	CASE QTY
6-12-4	1/2 X 4' #10 THHN WIRE - METALLIC CONNECTORS	1
6-12-6	1/2 X 6' #10 THHN WIRE - METALLIC CONNECTORS	1
6-34-4	3/4 X 4' #8 THHN WIRE - METALLIC CONNECTORS	1
6-34-6	3/4 X 6' #8 THHN WIRE - METALLIC CONNECTORS	1
6-12-4NM	1/2 X 4' #10 THHN WIRE - NON-METALLIC CONNECTORS	1
6-12-6NM	1/2 X 6' #10 THHN WIRE - NON-METALLIC CONNECTORS	1
6-34-4NM	3/4 X 4' #8 THHN WIRE - NON-METALLIC CONNECTORS	1
6-34-6NM	3/4 X 6' #8 THHN WIRE - NON-METALLIC CONNECTORS	1

- DiversiWhips are now available in a convenient, bulk packaged pallet pack at a discounted price
- (1) straight and (1) 90° non-metallic connector

DiversiWhips Pallet Packs


CAT. NO.	DESCRIPTION	CASE QTY
B6-12-4NM*	1/2 X 4' #10 THHN WIRE - NON-METALLIC CONNECTORS	90
B6-12-6NM*	1/2 X 6' #10 THHN WIRE - NON-METALLIC CONNECTORS	60
B6-34-6NM*	3/4 X 6' #8 THHN WIRE - NON-METALLIC CONNECTORS	45

*Must Ship LTL Freight; \$750 Order to qualify for freight allowed



B6-12-4NM


Liquid Tight Connectors - Straight - Zinc Die Cast

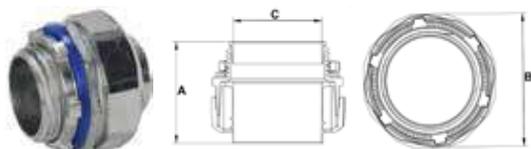

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15240	3/8"	1.46"	1.20"	0.48"	25	250
15241	1/2"	1.46"	1.20"	0.56"	25	250
15242	3/4"	1.46"	1.46"	0.71"	15	150
15243	1"	1.87"	1.69"	0.94"	8	80
15244	1-1/4"	2.06"	2.17"	1.24"	5	50
15245	1-1/2"	2.07"	2.44"	1.45"	4	40
15246	2"	2.01"	2.87"	1.86"	2	20
15247	2-1/2"	3.33"	3.39"	2.22"	-	12
15248	3"	3.50"	4.09"	2.76"	-	12
15249	3-1/2"	4.05"	4.90"	3.05"	-	6
15250	4"	4.09"	5.04"	3.62"	-	6

Liquid Tight Connectors - Straight - Insulated - Zinc Die Cast

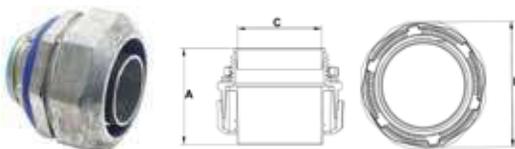

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15251	3/8"	1.52"	1.20"	0.48"	25	250
15252	1/2"	1.52"	1.20"	0.56"	25	250
15253	3/4"	1.52"	1.46"	0.71"	15	150
15254	1"	1.93"	1.69"	0.94"	8	80
15255	1-1/4"	2.08"	2.17"	1.24"	5	50
15256	1-1/2"	2.15"	2.44"	1.45"	4	40
15257	2"	2.08"	2.87"	1.86"	2	20
15258	2-1/2"	3.41"	3.39"	2.22"	-	10
15259	3"	3.58"	4.09"	2.76"	-	10
15260	3-1/2"	4.07"	4.86"	3.33"	-	6
15261	4"	4.17"	5.04"	3.62"	-	6

90° Liquid Tight Connectors - Zinc Die Cast



- 90° Orientation
- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15280	3/8"	0.48"	1.26"	2.04"	15	150
15281	1/2"	0.56"	1.26"	2.10"	15	150
15282	3/4"	0.71"	1.52"	2.36"	10	100
15283	1"	0.94"	1.77"	2.93"	5	50
15284	1-1/4"	1.24"	2.20"	3.34"	4	40
15285	1-1/2"	1.45"	2.46"	3.74"	2	20
15286	2"	1.86"	2.93"	4.21"	1	10
15287	2-1/2"	2.22"	3.54"	5.31"	-	6
15288	3"	2.76"	4.25"	6.47"	-	4
15289	3-1/2"	3.54"	4.86"	6.47"	-	3
15290	4"	3.62"	5.24"	6.90"	-	3

90° Liquid Tight Connectors - Insulated Throat - Zinc Die Cast



- 90° Orientation
- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15291	3/8"	0.48"	1.26"	2.09"	15	150
15292	1/2"	0.56"	1.26"	2.15"	15	150
15293	3/4"	0.71"	1.52"	2.69"	10	100
15294	1"	0.94"	1.77"	2.98"	5	50
15295	1-1/4"	1.24"	2.20"	3.40"	4	40
15296	1-1/2"	1.45"	2.46"	3.80"	2	20
15297	2"	1.86"	2.93"	4.27"	1	10
15298	2-1/2"	2.22"	3.54"	5.39"	-	6
15299	3"	2.76"	4.25"	6.13"	-	4
15300	3-1/2"	3.33"	4.86"	6.55"	-	3
15301	4"	3.62"	5.24"	6.98"	-	3

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
 FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT: WWW.MORRISPRODUCTS.COM



Liquid Tight Connectors - Straight - Insulated Throat - Malleable Iron

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15161	1/2"	0.91"	0.55"	1.30"	25	250
15162	3/4"	0.98"	0.59"	1.50"	10	100
15163	1"	1.14"	0.63"	1.81"	5	50
15164	1-1/4"	1.22"	0.67"	2.20"	5	50
15165	1-1/2"	1.30"	0.43"	2.44"	10	50
15166	2"	1.50"	0.73"	2.95"	5	25




- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



Liquid Tight Connectors - 90° - Insulated Throat - Malleable Iron

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15181	1/2"	1.42"	0.55"	1.30"	1.76"	10	100
15182	3/4"	1.73"	0.59"	1.50"	2.01"	10	100
15183	1"	2.01"	0.65"	1.81"	2.13"	5	50
15184	1-1/4"	2.30"	0.67"	2.20"	2.32"	-	10
15185	1-1/2"	2.62"	0.71"	2.44"	2.60"	-	10
15186	2"	2.99"	0.73"	2.95"	3.03"	-	5




- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



Liquid Tight Connectors - 45° - Insulated Throat - Malleable Iron

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15221	1/2"	1.89"	0.55"	1.30"	1.34"	10	100
15222	3/4"	1.97"	0.59"	1.50"	1.57"	10	100
15223	1"	2.60"	0.65"	1.81"	1.81"	5	50
15224	1-1/4"	2.76"	0.67"	2.20"	2.09"	-	10
15225	1-1/2"	3.11"	0.71"	2.44"	2.36"	-	10
15226	2"	3.66"	0.73"	2.95"	2.64"	-	5




- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



Liquid Tight Connectors - Straight - Insulated Throat - Steel

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15201	1/2"	0.91"	0.47"	1.12"	25	250
15202	3/4"	1.02"	0.53"	1.37"	10	100
15203	1"	1.12"	0.65"	1.70"	5	50
15204	1-1/4"	1.26"	0.67"	2.07"	5	50
15205	1-1/2"	1.46"	0.69"	2.30"	10	50
15206	2"	1.50"	0.73"	2.80"	5	25



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT WWW.MORRISPRODUCTS.COM

Liquid Tight Connectors



STRAIGHT

90°

- For use with metallic and non metallic liquid tight conduit, Type B
- Provides smooth connection
- No sharp edges to damage wire
- Wire easily pulled through
- U.L. and C.U.L. Listed

CAT. NO.	DESCRIPTION	BOX QTY	OUTER BOX
750-NMLT50	1/2" NON-METALLIC STRAIGHT CONNECTOR	25	600
750-NMLT75	3/4" NON-METALLIC STRAIGHT CONNECTOR	10	480
750-NMLT9050	1/2" NON-METALLIC 90° ELBOW CONNECTOR	10	480
750-NMLT9075	3/4" NON-METALLIC 90° ELBOW CONNECTOR	10	240

Single Piece Liquid Tight Fittings



STRAIGHT

90°

- Conduit threads onto ferrule and up inside the outer body
- Inside taper squeezes down on conduit for superior liquid tight seal
- Cut portion of conduit does not show, giving a more finished appearance
- Easy to use at a lower cost than regular liquid tight fittings
- U.L. and C.U.L. Listed

CAT. NO.	DESCRIPTION	INNER BOX	OUTER BOX
750-SLTC50	1/2" STRAIGHT SCREW-ON FITTING	25	600
750-SLTC9050	1/2" 90° SCREW-ON FITTING	25	600
750-SLTC75	3/4" STRAIGHT SCREW-ON FITTING	25	600
750-SLTC9075	3/4" 90° SCREW-ON FITTING	25	600

Non-Metallic Liquid Tight Connectors - Straight



- Terminate and Seal Non-Metallic Liquid-tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
21813	1/2"	1.18"	0.55"	1.42"	25	150
21814	3/4"	1.20"	0.64"	1.69"	10	100
21815	1"	1.23"	0.72"	2.02"	5	50
21816	1-1/4"	2.44"	0.76"	2.40"	5	50
21817	1-1/2"	2.70"	0.80"	2.67"	4	40
21818	2"	2.99"	0.85"	3.28"	2	20

Non-Metallic Liquid Tight Connectors - 90°



- 90° Orientation
- Terminate and Seal Non-Metallic liquid-tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
21823	1/2"	2.84"	0.50"	2.03"	25	150
21824	3/4"	3.25"	0.50"	2.33"	10	100
21825	1"	3.54"	0.60"	2.95"	5	50
21826	1-1/4"	4.75"	0.76"	5.20"	3	30
21827	1-1/2"	4.75"	0.80"	5.20"	2	20
21828	2"	5.42"	0.86"	5.80"	1	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



Disconnects - Metal Case

- Fused models designed with fuses in pull out handle for easy replacement
- Fused models have indicator lights for blown fuses
- The line, load, and ground terminals are aligned for ease of wiring
- Side open door opens more than 180° for maximum access and has a full dead front
- Rain tight and sleet resistant
- The UL Listed number is IRF9, NEMA Type 3R and the US Patent is 6,630,637



TDDS-60

CAT. NO.	DESCRIPTION	CASE QTY
DDS-30	30A FUSIBLE DISCONNECT SWITCH	10
DDS-60	60A FUSIBLE DISCONNECT SWITCH	10
DDS-60U	60A NON-FUSIBLE DISCONNECT SWITCH	10



Low Profile Disconnects Metal Case

- Non-Fusible pull out disconnect switch
- Side opening door with a full dead front
- Rain tight and sleet resistant
- Available with pre-installed 6' 1/2" NM whip
- NEMA Type 3R



CAT. NO.	DESCRIPTION	CASE QTY
EDS-60U	60A NON-FUSIBLE DISCONNECT SWITCH	10
EDS-12-6NM	DISCONNECT AND WHIP COMBO KIT	3



Top Opening Disconnects

- Newly designed A/C Metal Disconnect
- Single Phase
- Easy Wire Hook Up
- Rear Entry Knockouts
- Full Dead Front
- Heavy Gage Steel
- Rain Proof



CAT. NO.	HINGE TYPE	FUSIBLE	PHASE	AMPS	CASE QTY
PD30F	TOP	YES	I	30	6
PD60F	TOP	YES	I	60	6
PD60NF	TOP	NO	I	60	6

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Disconnect - Molded Case



- 60A non-fusible molded case disconnect switch is housed in a lightweight, NEMA 3R case
- Single Phase, 2 wire, 240 VAC; or split phase, 3 wire 240 VAC
- Molded Case Switch with color coded On/Off Indicators
- #3 TO #14 Line, Load & Ground terminals
- Features a side opening door with more than 180° access, full dead front, and a locking tab
- 1/2", 3/4" & 1" KDs on 4 sides

CAT. NO.	DESCRIPTION	CASE QTY
DDS-60SW	60A NON FUSIBLE DISCONNECT SWITCH	10

Disconnect with Surge Protection



- Non-Fused
- NEMA Type 3R
- Pre-installed surge protector
- Automatic reset to handle multiple surge events
- Includes: Diversitech DDS-60U & Ditek DTK-I20/240CM
- Automatic reset to handle multiple surge events
- Highly visible diagnostic LED
- 3 Year \$7,500 Residential Connected Equipment Warranty

CAT. NO.	HINGE TYPE	FUSIBLE	AMPS	CASE QTY
NEW DDS-30-SURGE	SIDE	NO	30	6
NEW DDS-60-SURGE	SIDE	NO	60	6
DDS-60U-SURGE	SIDE	NO	60	6

Disconnects Non-Metallic Case



- New Designed A/C Non-Metallic Disconnect
- Single Phase
- Rear Entry Knockouts
- Nema 3R Enclosure
- Rain Proof
- UL Listed

CAT. NO.	HINGE TYPE	FUSIBLE	PHASE	AMPS	CASE QTY
PD-NM-30F	SIDE	YES	I	30	6
PD-NM-60F	SIDE	YES	I	60	6
PD-NM-60NF	SIDE	NO	I	60	6

NEW Disconnect with Built-in GFCI Outlet



- Weather and Tamper resistant 20A GFCI receptacles
- Compact design to save space
- NEMA 3R Enclosure allowing cord exit
- Lockable top opening design

CAT. NO.	HINGE TYPE	FUSIBLE	AMPS	CASE QTY
DDS-60U-GFCI-20A	TOP	NO	60	6

TITAN MAX[®]

Auxiliary Contact Blocks with Quick Connect



CAT. NO.	TYPE	CASE QTY
TMXINC	SPST NC	100
TMXINO	SPST NO	100
TMX2NO	DPST NO	100
TMXINC-INO	DPST INC + INO	100

Auxiliary Contacts



CAT. NO.	TYPE	CASE QTY
TMX7590NC	NORMALLY CLOSED	100
TMX7590NO	NORMALLY OPEN	100

Microswitch Blocks



CAT. NO.	TYPE	CASE QTY
TMXSPDT1	SPDT AT LEFT POSITION	100
TMXSPDT2	SPDT AT RIGHT POSITION	100
TMX2SPDT	DPDT	100

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Definite Purpose Contactors One Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C130A	30	24	50
C130B	30	120	50
C130C	30	208/240	50
C140A	40	24	50
C140B	40	120	50
C140C	40	208/240	50

Definite Purpose Contactors Three Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
NEW C325B	25	120	25
C330A	30	24	25
C330B	30	120	25
C330C	30	208/240	25
C340A	40	24	25
C340B	40	120	25
C340C	40	208/240	25
C350A	50	24	24
C350B	50	120	24
C350C	50	208/240	24
C360A	60	24	24
C360B	60	120	24
C360C	60	208/240	24
C375A	75	24	12
C375B	75	120	12
C375C	75	208/240	12
C390A	90	24	12
C390B	90	120	12
C390C	90	208/240	12

Definite Purpose Contactors Two Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C220A	20	24	50
C220B	20	120	50
C220C	20	208/240	50
C225A	25	24	50
C225B	25	120	50
C225C	25	208/240	50
C230A	30	24	50
C230B	30	120	50
C230C	30	208/240	50
C240A	40	24	50
C240B	40	120	50
C240C	40	208/240	50

Definite Purpose Contactors Four Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C430A	30	24	25
C430B	30	120	25
C430C	30	208/240	25
C440A	40	24	25
C440B	40	120	25
C440C	40	208/240	25

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

TITAN MAX[®]

Definite Purpose Contactors One Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX130A2	30	24	50
TMX130B2	30	120	50
TMX130C2	30	208/240	50
TMX140A2	40	24	50
TMX140B2	40	120	50
TMX140C2	40	208/240	50

Definite Purpose Contactors Three Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX330A2	30	24	25
TMX330B2	30	120	24
TMX330C2	30	208/240	25
TMX340A2	40	24	25
TMX340B2	40	120	25
TMX340C2	40	208/240	25
TMX350A2	50	24	24
TMX350B2	50	120	24
TMX350C2	50	208/240	24
TMX360A2	60	24	24
TMX360B2	60	120	24
TMX360C2	60	208/240	25
TMX375A2	75	24	25
TMX375B2	75	120	25
TMX375C2	75	208/240	12
TMX390A2	90	24	12
TMX390B2	90	120	12
TMX390C2	90	208/240	12

Definite Purpose Contactors Two Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX225A2	25	24	50
TMX225B2	25	120	50
TMX225C2	25	208/240	50
TMX230A2	30	24	50
TMX230B2	30	120	50
TMX230C2	30	208/240	50
TMX240A2	40	24	50
TMX240B2	40	120	50
TMX240C2	40	208/240	50

Definite Purpose Contactors Four Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX430A2	30	24	25
TMX430B2	30	120	25
TMX430C2	30	208/240	25
TMX440A2	40	24	25
TMX440B2	40	120	25
TMX440C2	40	208/240	25

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

HEAVY DUTY Relays



- 1/4" Quick Connect Terminals
- Quiet & reliable operations
- Used for Solenoids, Fan Motors, & other applications



CAT. NO.	DESCRIPTION	AMPS	125 VOLTS	250 VOLTS	COIL VOLTAGE	CASE QTY
PR360	SPST-NO	18	12/60	8/48	24 VAC	150
PR362	SPST-NO	18	12/60	8/48	120 VAC	150
PR370	SPDT	18	12/60	8/48	24 VAC	150
PR372	SPDT	18	12/60	8/48	120 VAC	150
PR374	SPDT	18	12/60	8/48	240 VAC	150
PR380	SPST NO + NC	18	12/60	8/48	24 VAC	150
PR382	SPST NO + NC	18	12/60	8/48	120 VAC	150
PR384	SPST NO + NC	18	12/60	8/48	240 VAC	150

General Purpose Relays



- SPST & SPDT Fan Relays
- 1/4" Quick Connect Terminals
- Quiet & reliable operations



CAT. NO.	DESCRIPTION	COIL VOLTAGE	AMPS	FLA/LRA@125V	FLA/LRA@250V	CASE QTY
PR2900	SPST-NO	24 VAC	16	-	8/25	150
PR2910	SPST-NO	120 VAC	16	-	8/25	150
PR2920	SPST-NO	240 VAC	16	-	8/25	150
PR2930	SPDT	24 VAC	16	-	8/25	150
PR2940	SPDT	120 VAC	16	-	8/25	150
PR2950	SPDT	240 VAC	16	-	8/25	150

General Purpose Switching Relays



- Switching Relays
- 1/4" Quick Connect Terminals
- Quiet & reliable operations



CAT. NO.	COIL VOLTAGE	DESCRIPTION	TERMINALS 1-2-3	TERMINALS 4-5-6	CASE QTY
PR340	24	DPDT	POWER	POWER	100
PR341	110/120	DPDT	POWER	POWER	100
PR342	208/240	DPDT	POWER	POWER	100

NEW Potential Relays

TITAN ICE™



- Applications:
 - Central air conditioner compressors
 - Submersible pump motors
 - Motors generally over 1/3 HP with start capacitors
- Universal replacements for thousands of GE 3ARR3 model relays and many other OEM's
- Proven performance for 40 years
- Contact rating: 35 amps max, break only
- Endurance up to 500,000 operations depending on load
- Screw type terminals #8-32 thread
- Six (6) quick connect terminals and screws included with each relay

CAT. NO.	INDUSTRY #	CONTINUOUS COIL VOLTAGE	PICK UP MINIMUM	PICK UP MAXIMUM	DROP-OUT MAXIMUM
TR68	19007	500V	322V	348V	138V
TR551	19551	332V	243V	271V	91V

Class II Transformers



■ Packard transformers replace models with equal or lower VA rating

	CAT. NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING TYPE	TERMINAL TYPE	DIRECT REPLACEMENT FOR	CASE QTY
NEW	PF42420	120/208/240	20	24	FOOT	WIRE LEAD	JARD 2031F UET I14	30
	PMI2040	120	40	24	PLATE	WIRE LEAD/TERM	UNIVERSAL REPLACEMENT	18
NEW	PF12440	120	40	24	FOOT	WIRE LEAD	JARD 4011F	30
	PF32440	120/208/240	40	24/12/2.5	FOOT	WIRE LEAD	JARD 4032F UET I01	30
NEW	PF40310EM	120/208/240	40	24	FOOT	TERMINALS	JARD 40310EM RHEEM 46-101905-01	18
NEW	PF22440	208/240	40	24	FOOT	WIRE LEAD	JARD 4021F	30
	PF27440	277	40	24	FOOT	WIRE LEAD	JARD 40271F	30
	PM43448	120/208/240	48	24/12/2.5	MULTI	WIRE LEAD	UNIVERSAL REPLACEMENT	18
NEW	PF12450	120	50	24	FOOT	WIRE LEAD	RHEEM 46-102856-02	30
NEW	PF42450	120/208/240/480	50	24	FOOT	WIRE LEAD	JARD 5041C	12
NEW	PF52475	120/208/240/480	75	24	FOOT	WIRE LEAD	JARD 7541C UET I79R	12
	PM10048P	208/240/480	100	24/120	MULTI	WIRE LEAD	JARD 10048P	12

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Sequencers



- Full-load rated auxiliary contacts
- Standard operating ambient between -50°F (-45.5°C) and 165°F (73.8°C)
- Shock and vibration resistant
- Solid state
- Quick-connect terminals
- Mounts in any position

CAT. NO.	NO. OF TIMINGS	NO. OF SWITCHES	SWITCH CONFIG. (NORMALLY OPEN)	DELAY ON TIME	DELAY OFF TIME	CASE QTY
HS24A341	1	1	SPST	1-20	40-110	50
HS24A342	1	1	SPST	30-90	1-30	50
HS24A343	1	2	DPST	1-20, 1-20	40-110, 40-110	50
HS24A344	1	2	DPST	30-90, 30-90	1-30, 1-30	50
HS24A345	2	3	DPST-SPST	1-110, 1-110, 1-110	1-110, 1-110, 1-110	50
HS24A346	2	4	2-DPDT	1-110 * 4	1-110 * 4	50
HS24A3414	4	5	2- DPDT-SPST	1-160 * 5	1-160 * 5	50

Fan Centers



- UL Recognized 40 VA Transformer
- Color Coded Leads
- Low Voltage Terminal Board

CAT. NO.	VOLTAGE	PRIMARY CONNECTIONS	VOLTAGE	SECONDARY CONNECTIONS	RELAY	CASE QTY
FC90112	120	LEADS	24	TERMINAL BOARD	DPDT	12
FC90113	120	LEADS	24	TERMINAL BOARD	SPDT	12
FC90118	120	LEADS	24	TERMINAL BOARD	SPNO/SPNC	12
FC90119	208/240	LEADS	24	TERMINAL BOARD	SPDT	12
FC90130	120/208/240	LEADS	24	TERMINAL BOARD	DPDT	12

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Single Phase Surge Protectors



- Weatherproof Enclosure
- Parallel connection for easy installation
- Diagnostic LED provides positive indication of power, ground presence, and surge protection
- Automatically resets to handle multiple surge events
- Typical Applications: A/C disconnect, small electrical panels, pool/well pumps
- Half the response time as similar models
- Made in the USA



CAT. NO.	SERVICE WIRING	SURGE CURRENT RATING	MCOV	UL 1449, 3RD ED. V.P.R.	SHORT CIRCUIT CURRENT RATING	UL1449, 3RD ED. IN RATING	DIRECT REPLACEMENT FOR
PSP72KA	SPLIT Φ (2W + G), 120/240VAC	50,000A	150/320V	700V L-G, 1,200V L-L	10,000A	10,000A	SMC60 SMC150

Adjustable Delay on Break Timer



- Universal voltage operation
- Higher 1.5 amp power rating
- Simple 2-wire hookup
- Knob-adjustable time delays

CAT. NO.	DESCRIPTION	CASE QTY
ICM206	ADJUSTABLE DELAY ON BREAK	25

Adjustable Delay on Make Timer



- Universal voltage operation
- Higher 1.5 amp power rating
- Simple 2-wire hookup
- Knob-adjustable time delays

CAT. NO.	DESCRIPTION	CASE QTY
ICM102	ADJUSTABLE DELAY ON MAKE	10
ICM102F	ADJUSTABLE DELAY ON MAKE W/WIRE LEADS	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW 4-Blade Propellers Heavy Duty Condenser Style



Applications:
Condensing units, general building and agricultural ventilation fans

- High strength aluminum blades with corrosion resistant center spiders

CAT. NO.	DIAMETER	PITCH	ROTATION	HUB POSITION	CASE QTY
L60558101	18"	27°	CW	INTERCHANGEABLE	2

NEW Propellers With Fixed Hub - 3-Blade



Applications:
Unitary condensing units, heat pumps, unit heaters, ventilators and exhaust fans

- Embossed for added strength
- Factory balanced
- Steel spiders with 1/2" and 5/8" bores
- Individually boxed
- Aluminum fan blades unless otherwise specified
- Made in USA

CAT. NO.	DIAMETER	PITCH	ROTATION	BORE	HUB POSITION	DIRECT REPLACEMENT FOR
R32604	26"	20°	CCW	1/2"	INTAKE	10625738

NEW Small Aluminum Fan Blades With Hubs



CAT. NO.	DIAMETER	BLADES	BORE	PITCH	ROTATION	HUB POSITION	CASE QTY
A61312	10"	5	5/16"	30°	CW	INTAKE	50
A65123	12"	5	5/16"	23°	CW	DISCHARGE	30
A61215	12"	5	5/16"	24°	CCW	INTAKE	30
FB99100	12"	5	1/2"	33°	CW	DISCHARGE	N/A
A61405	14"	5	5/16"	19°	CW	INTAKE	25

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Galvanized Steel Blower Wheels

Applications:
Condensers, draft boosters, flue exhaust,
small appliances, furnaces

- High strength aluminum blades with corrosion resistant center spiders



CAT. NO.	DIAMETER	WIDTH	ROTATION	BORE	DIRECT REPLACEMENT FOR	CASE QTY
A65569BW	4"	1-1/2"	CCW	5/16"	CARRIER LA1AA005	12
BW16549	5-1/4"	1"	CW	5/16"	CARRIER LA2IRB549	100
BW16548	5-3/4"	1"	CW	5/16"	CARRIER LA2IRB548	65

NEW Plastic Blower Wheels

- For use with 3.3" Diameter and C-Frame Motors
- Replaces Nutone 5900A000 & 5901A-000
- 1/4" D Shape Bore



CAT. NO.	BORE	DIAMETER	WIDTH	BORE	DIRECT REPLACEMENT FOR	CASE QTY
A65900	1/4"	5-3/4"	2"	D SHAPE	NUTONE 5900A000	50

NEW "H" Style Bushings



- Applications:
Sheaves
Sprockets
Pulleys
- Solid flange helps reduce vibration in the drive
- 3/4" taper per foot, self locking
- Double split barrel provides positive clamping to the shaft

CAT. NO.	STOCK BORE	KEY WAY	CASE QTY
PH34	3/4"	3/16" X 3/32"	45
PH118	1-1/8"	1/4" X 1/8"	45
PH138	1-3/8"	5/16" X 1/16"	45

NEW Hubs With Set Screws and Mounting Screws

- These propeller hubs are designed for use with air conditioning condensing units.
- They include pre-tapped holes with mounting and set screws.



CAT. NO.	BORE	CASE QTY
L60765804	1/2"	12

NEW Hubs With Set Screws and Mounting Screws



CAT. NO.	BORE	NUMBER OF SET SCREWS	CASE QTY
H60765804	1/2"	2	12

NEW PVP Variable Pitch Single Groove Pulleys



- Fitted with Hollow Head Set Screws
- Any Standard Double Groove Packard Drive
- Pulley can be Used as a Companion Pulley

CAT. NO.	TYPE	OUTSIDE DIAMETER	3L BELTS				4L OR A BELTS				5L OR B BELTS				STOCK BORE	DIRECT REPLACEMENT FOR
			MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN		
PVP3412	1	3.15"	1.7	4	2.5	0	1.9	5	2.9	0	2.4	5	3.2	1	1/2"	IVP34 X 1/2
PVP3458	1	3.15"	1.7	4	2.5	0	1.9	5	2.9	0	2.4	5	3.2	1	5/8"	IVP34 X 5/8
PVP4012	1	3.75"	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	1/2"	IVP40 X 1/2
PVP4058	1	3.75"	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	5/8"	IVP40 X 5/8
PVP4078	1	3.75"	2.3	4	3.1	0	2.4	5	3.4	0	2.7	6	3.7	1	7/8"	IVP40 X 7/8
PVP4478	2	4.15"	2.7	4	3.5	0	2.8	5	3.8	0	3.1	6	4.1	1	7/8"	IVP44 X 7/8
PVP5058	1	4.75"	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	5/8"	IVP50 X 5/8
PVP5078	2	4.75"	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	7/8"	IVP50 X 7/8
PVP5678	2	5.35"	3.9	4	4.7	0	4	5	5.0	0	4.3	6	5.3	1	7/8"	IVP56 X 7/8
PVP56118	2	5.35"	3.9	4	4.7	0	4	5	5.0	0	4.3	6	5.3	1	1-1/8"	IVP56 X 1-1/8
PVP60118	2	6.00"	-	-	-	-	4.2	5	5.2	0	4.3	6	5.5	0	1-1/8"	IVP60 X 1-1/8
PVP62118	2	5.95"	4.5	4	5.3	0	4.6	5	5.7	0	4.8	6	5.9	0	1-1/8"	IVP62 X 1-1/8
PVP6278	2	5.95"	4.5	4	5.3	0	4.6	5	5.7	0	4.8	6	5.9	0	7/8"	IVP62 X 7/8
PVP68118	2	6.55"	5.1	4	5.9	0	5.2	5	6.2	0	5.5	6	6.5	1	1-1/8"	IVP68 X 1-1/8

NEW PVL Variable Pitch Pulleys



- Adjust the Size of the Pulley Based On Needed Air Flow or Speed Required
- Furnished with Standard Keyway and Hollow Head Set Screws (All Set Screws are 5/16-18 Knurled)

CAT. NO.	OUTSIDE DIAMETER	3L BELTS				4L OR A BELTS				5L OR B BELTS				STOCK BORE	KEYWAY	DIRECT REPLACEMENT FOR
		MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN			
PVL3412	3.15"	1.7	4	2.5	0	1.9	5	2.9	0	5	2.4	3.2	1	1/2"	NONE	IVL34 X 1/2
PVL3458	3.15"	1.7	4	2.5	0	1.9	5	2.9	0	5	2.4	3.2	1	5/8"	3/16" X 3/32"	IVL34 X 5/8
PVL4458	4.15"	2.7	4	3.5	0	2.8	5	3.8	0	6	3.1	4.1	1	5/8"	3/16" X 3/32"	IVL44 X 5/8

NEW Single Groove Pulleys for L or A Belts



- Packard Drive "PAK", "PBK", "PAKH" and "PBKH" Pulleys accurately machined from grained cast iron, statically balanced, painted and individually packaged
- Furnished with Standard Keyway and Hollow Head Set Screws
- 3L belts may be used with these pulleys

CAT. NO.	DIAMETER			TYPE	STOCK BORE	DIMENSIONS				DIRECT REPLACEMENT FOR BROWNING
	O.D.	DATUM A	PITCH 3L			F	L	P	C	
PAK3058	3.05"	2.8	2.46	2	5/8"	21/32"	15/16"	7/16"	5/32"	AK3058

NEW P2VP Variable Pitch Double Groove Pulleys



- Fitted with Hollow Head Set Screws
- Any Standard Double Groove Packard Drive
- Pulley can be Used as a Companion Pulley

CAT. NO.	TYPE	OUTSIDE DIAMETER	3L BELTS				4L OR A BELTS				5L OR B BELTS				STOCK BORE	DIRECT REPLACEMENT FOR
			MIN. PITCH	MIN. TURNS OPEN	MAX. PITCH	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN	MIN. DATUM	MIN. TURNS OPEN	MAX. DATUM	MAX. TURNS OPEN		
P2VP4278	4	3.95"	2.5	4	3.3	0	2.6	5	3.6	0	2.9	6	3.9	1	7/8"	2VP42 X 7/8
P2VP42118	4	3.95"	2.5	4	3.3	0	2.6	5	3.6	0	2.9	6	3.9	1	1-1/8"	2VP42 X 1-1/8
P2VP50118	5	4.75"	3.3	4	4.1	0	3.4	5	4.4	0	3.7	6	4.7	1	1-1/8"	2VP50 X 1-1/8
P2VP60138	5	6	-	-	-	-	4.2	5	5.2	0	4.3	6	5.5	0	1-3/8"	2VP60 X 1-3/8
P2VP62118	5	6	4.5	4	5.3	0	4.6	5	5.6	0	4.9	6	5.9	1	1-1/8"	2VP62 X 1-1/8



175 Piece Terminal Kit With Crimp Tool

CONTAINS THE FOLLOWING:

QTY	CAT. NO.	ITEM DESCRIPTION
4	10014	RING TERMINAL 22 - 16 #8
4	10034	RING TERMINAL 16 - 14 #8
5	10036	RING TERMINAL 16 - 14 #10
4	10062	RING TERMINAL 12 - 10 #8
6	10064	RING TERMINAL 12 - 10 #10
4	10066	RING TERMINAL 12 - 10 1/4"
4	10112	SPADE TERMINAL 22 - 16 #6
4	10114	SPADE TERMINAL 22 - 16 #8
4	10116	SPADE TERMINAL 22 - 16 #10
4	10132	SPADE TERMINAL 16 - 14 #6
7	10134	SPADE TERMINAL 16 - 14 #8
6	10136	SPADE TERMINAL 16 - 14 #10
8	10162	SPADE TERMINAL 12 - 10 #8
15	10164	SPADE TERMINAL 12 - 10 #10
4	10166	SPADE TERMINAL 12 - 10 1/4"

QTY	CAT. NO.	ITEM DESCRIPTION
10	10182	BUTT CONNECTOR 22 - 18
10	10184	BUTT CONNECTOR 16 - 14
8	10186	BUTT CONNECTOR 12 - 10
4	10214	VINYL MALE DISCONNECT 22 - 16 0.25"
4	10224	VINYL MALE DISCONNECT 16 - 14 0.25"
4	10232	VINYL MALE DISCONNECT 12 - 10 0.25"
5	10314	VINYL FEM DISCONNECT 22 - 18 0.25"
4	10322	VINYL FEM DISCONNECT 16 - 14 0.187"
10	10324	VINYL FEM DISCONNECT 16 - 14 0.25"
12	10332	VINYL FEM DISCONNECT 12 - 10 0.25"
4	10411	NYL FULL INS FEM DISCON 22 - 18 0.25"
5	10412	NYL FULL INS FEM DISCON 16 - 14 0.25"
4	10414	NYL FULL INS FEM DISCON 12 - 10 0.25"
4	10415	NYL FULL INS MALE DISCON 22 - 18 0.25"
4	10416	NYL FULL INS MALE DISCON 16 - 14 0.25"



- High impact reusable plastic box
- 22 - 10 AWG Crimp Tool
- Assortment of ring and spade terminals, butt connectors, male and female disconnects

CAT. NO.	KITS/ CASE
10815	5



200 Piece Terminal Kit with Controlled Cycle Crimp Tool

CONTAINS THE FOLLOWING:

QTY	CAT. NO.	ITEM DESCRIPTION
4	10012	RING TERMINAL 22 - 16 #6
4	10014	RING TERMINAL 22 - 16 #8
4	10016	RING TERMINAL 22 - 16 #10
4	10032	RING TERMINAL 16 - 14 #6
4	10034	RING TERMINAL 16 - 14 #8
5	10036	RING TERMINAL 16 - 14 #10
4	10062	RING TERMINAL 12 - 10 #8
6	10064	RING TERMINAL 12 - 10 #10
4	10066	RING TERMINAL 12 - 10 1/4"
4	10068	RING TERMINAL 12 - 10 5/16"
4	10112	SPADE TERMINAL 22 - 16 #6
4	10114	SPADE TERMINAL 22 - 16 #8
4	10116	SPADE TERMINAL 22 - 16 #10
4	10132	SPADE TERMINAL 16 - 14 #6
8	10134	SPADE TERMINAL 16 - 14 #8
7	10136	SPADE TERMINAL 16 - 14 #10
9	10162	SPADE TERMINAL 12 - 10 #8

QTY	CAT. NO.	ITEM DESCRIPTION
16	10164	SPADE TERMINAL 12 - 10 #10
4	10166	SPADE TERMINAL 12 - 10 1/4"
11	10182	BUTT CONNECTOR 22 - 18
11	10184	BUTT CONNECTOR 16 - 14
9	10186	BUTT CONNECTOR 12 - 10
4	10214	VINYL MALE DISCONNECT 22 - 16 0.25"
4	10224	VINYL MALE DISCONNECT 16 - 14 0.25"
4	10232	VINYL MALE DISCONNECT 12 - 10 0.25"
5	10314	VINYL FEM DISCONNECT 22 - 18 0.25"
4	10322	VINYL FEM DISCONNECT 16 - 14 0.187"
11	10324	VINYL FEM DISCONNECT 16 - 14 0.250"
13	10332	VINYL FEM DISCONNECT 12 - 10 0.250"
4	10411	NYL FULL INS FEM DISCON 22 - 18 0.250"
5	10412	NYL FULL INS FEM DISCON 16 - 14 0.250"
4	10414	NYL FULL INS FEM DISCON 12 - 10 0.250"
4	10415	NYL FULL INS MALE DISCON 22 - 18 0.250"
4	10416	NYL FULL INS MALE DISCON 16 - 14 0.250"



- High impact steel tray
- Ergonomic controlled cycle crimp tool
- Assortment of ring and spade terminals, butt connectors, male and female disconnects

CAT. NO.	KITS/ CASE
10817	5



500 Piece Terminal Kit with Controlled Cycle Crimp Tool

CONTAINS THE FOLLOWING:

QTY	CAT. NO.	ITEM DESCRIPTION
8	10012	RING TERMINAL 22 - 16 #6
10	10014	RING TERMINAL 22 - 16 #8
8	10016	RING TERMINAL 22 - 16 #10
8	10032	RING TERMINAL 16 - 14 #6
10	10034	RING TERMINAL 16 - 14 #8
14	10036	RING TERMINAL 16 - 14 #10
10	10062	RING TERMINAL 12 - 10 #8
16	10064	RING TERMINAL 12 - 10 #10
10	10066	RING TERMINAL 12 - 10 1/4"
8	10068	RING TERMINAL 12 - 10 5/16"
10	10112	SPADE TERMINAL 22 - 16 #6
10	10114	SPADE TERMINAL 22 - 16 #8
10	10116	SPADE TERMINAL 22 - 16 #10
10	10132	SPADE TERMINAL 16 - 14 #6
21	10134	SPADE TERMINAL 16 - 14 #8
18	10136	SPADE TERMINAL 16 - 14 #10
23	10162	SPADE TERMINAL 12 - 10 #8


QTY	CAT. NO.	ITEM DESCRIPTION
40	10164	SPADE TERMINAL 12 - 10 #10
8	10166	SPADE TERMINAL 12 - 10 1/4"
28	10182	BUTT CONNECTOR 22 - 18
30	10184	BUTT CONNECTOR 16 - 14
23	10186	BUTT CONNECTOR 12 - 10
8	10214	VINYL MALE DISCONNECT 22 - 16 0.25"
10	10224	VINYL MALE DISCONNECT 16 - 14 0.25"
10	10232	VINYL MALE DISCONNECT 12 - 10 0.25"
14	10314	VINYL FEM DISCONNECT 22 - 18 0.25"
10	10322	VINYL FEM DISCONNECT 16 - 14 0.187"
28	10324	VINYL FEM DISCONNECT 16 - 14 0.25"
35	10332	VINYL FEM DISCONNECT 12 - 10 0.25"
10	10411	NYL FULL INS FEM DISCON 22 - 18 0.25"
14	10412	NYL FULL INS FEM DISCON 16 - 14 0.25"
10	10414	NYL FULL INS FEM DISCON 12 - 10 0.25"
8	10415	NYL FULL INS MALE DISCON 22 - 18 0.25"
10	10416	NYL FULL INS MALE DISCON 16 - 14 0.25"



- High impact steel tray
- Ergonomic controlled cycle crimp tool
- Assortment of ring and spade terminals, butt connectors, male and female disconnects


CAT. NO.	KITS/ CASE
10818	5

Screw-On Wire Connectors



CAT. NO.	COLOR	WIRE COMBINATIONS	MAX VOLTS	DIMENSIONS					BOX/BAG QTY	CASE QTY
				A	B	C	D	E		
23071	GRAY	MAX: 1 #14 & 1 #20 MIN: 2 #22	300V	0.150"	0.264"	0.339"	0.228"	0.598"	100	15,000
23072	BLUE	MAX: 3 #16 MIN: 2 #22	300V	0.161"	0.276"	0.386"	0.232"	0.693"	100	15,000
23073	ORANGE	MAX: 4 #16 & 1 #20 MIN: 1 #18 & 1 #22	600V	0.197"	0.390"	0.480"	0.307"	0.862"	100	10,000
23074	YELLOW	MAX: 1 #18 & 4 #14 MIN: 1 #18 & 1 #14	600V	0.236"	0.441"	0.551"	0.311"	0.937"	100	6,000
23076	RED	MAX: 3 #14 & 4 #16 MIN: 1 #10 & 1 #20	600V 1000V FIXTURES & SIGNS	0.276"	0.504"	0.630"	0.350"	1.047"	100	3600

Wing Connectors



CAT. NO.	COLOR	WIRE COMBINATIONS	DIMENSIONS					BOX QTY	CASE QTY
			A	B	C	D	E		
23084	YELLOW	MAX: 4 #16 & 2 #18 MIN: 2 #18	0.252"	0.386"	0.717"	0.354"	1.016"	100	10,000
23085	TAN	MAX: 3 #12 & 3 #18 MIN: 2 #18	0.283"	0.457"	0.72"	0.362"	1.142"	100	10,000
23086	RED	MAX: 2 #12 & 4 #14 MIN: 1 #16 & 1 #14	0.354"	0.531"	0.906"	0.378"	1.252"	100	8,000
23088	GRAY	MAX: 3 #10 MIN: 3 #14 & 1 #18	0.394"	0.587"	1.00"	0.394"	1.311"	50	5,000
23090	BLUE	MAX: 1 #8 & 3 #10 MIN: 2 #10 & 1 #12	0.472"	0.74"	1.26"	0.516"	1.575"	50	4,000

Combo Handy Pack Wire & Winged Connectors



Contains the following:

QTY	PRODUCT NUMBER	DESCRIPTION
90 CONNECTORS	23073	ORANGE WIRE CONNECTOR
60 CONNECTORS	23074	YELLOW WIRE CONNECTOR
40 CONNECTORS	23076	RED WIRE CONNECTOR
40 CONNECTORS	23085	TAN TWISTED WING CONNECTOR

CAT. NO.	HANDY PACKS PER CASE
23512	16

Contains the following:

QTY	PRODUCT NUMBER	DESCRIPTION
90 CONNECTORS	23073	ORANGE WIRE CONNECTOR
50 CONNECTORS	23084	YELLOW TWISTED WING CONNECTOR
40 CONNECTORS	23085	TAN TWISTED WING CONNECTOR
30 CONNECTORS	23086	RED TWISTED WING CONNECTOR

CAT. NO.	HANDY PACKS PER CASE
23514	16

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT: WWW.MORRISPRODUCTS.COM



- Non-Insulated
- Made of Steel
- Used for Armored & NM Cable
- Sharp Tips



Staples

MORRIS PRODUCTS LINE

ELECTRICAL

Staples / Wire

CAT. NO.	CABLE RANGE & TYPES	DIMENSIONS		BOX QTY	CASE QTY
		W	D		
19556	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	100	2,520
19555	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	500	800
19554	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	-	5,000/PAIL
19553	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	100	1,800
19552	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	500	400
19551	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	-	5,000/PAIL



High Temperature Wire 400°F (204°C), 600V

- 7 strand tin coated copper wire
- Silicone rubber insulation
- Braided fiberglass jacket
- Use on the front of all gas furnaces with spark ignition
- Used on all heat producing food preparation equipment

CAT. NO.	DESCRIPTION	CASE QTY
WHTB14-50	14 GAUGE, BLACK, 50'	1
WHTR14-50	14 GAUGE, RED, 50'	1
WHTW14-50	14 GAUGE, WHITE, 50'	1
WHTB12-50	12 GAUGE, BLACK, 50'	1
WHTB10-50	10 GAUGE, BLACK, 50'	1



- Class 2 thermostat wire for indoor wiring
- Soft drawn bare copper wire
- Semi rigid PVC insulation
- PVC overall jacket
- Packaged on aluminum spool

CAT. NO.	DESCRIPTION	CASE QTY
620-18-2	18 AWG, 2 CONDUCTORS - 500' SPOOL	4
620-18-3	18 AWG, 3 CONDUCTORS - 500' SPOOL	4
620-18-4	18 AWG, 4 CONDUCTORS - 250' SPOOL	4
620-18-5	18 AWG, 5 CONDUCTORS - 250' SPOOL	4
620-18-6	18 AWG, 6 CONDUCTORS - 250' SPOOL	4
T620-18-7	18 AWG, 7 CONDUCTORS - 250' SPOOL	4
620-18-8	18 AWG, 8 CONDUCTORS - 250' SPOOL	4
620-18-10	18 AWG, 10 CONDUCTORS - 250' SPOOL	4
620-20-3	20 AWG, 3 CONDUCTORS - 500' SPOOL	4
620-20-8	20 AWG, 8 CONDUCTORS - 250' SPOOL	4

Thermostat Wire



Standard PTC Relay and Hard Start Capacitors



- Wired with "Piggy-Back" terminals for easy installation on run capacitors
- Designed for 115 volt thru 277 volt systems
- Mounts easily with either screw or clip
- Increases compressor starting torque for faster recycling
- For all permanent split capacitor, single phase air conditioning and heat pump systems

CAT. NO.	OPERATING VOLTAGE (VAC)	RECOMMENDED RANGE	INCREASE IN TORQUE %	CASE QTY
TQS5	115-277	1/2HP TO 10HP	300%	20
TQS6	115-277	1/2HP TO 10HP	500%	25
TQS8	115-277	1/2HP TO 10HP	600%	25

TorQstart 3-N-1 Kit



- Combination relay, overload, and capacitor
- Pre-wired for easy installation
- Extra-long compressor leads for mounting flexibility
- All models adapt to 115-volt compressors with external overload protector

CAT. NO.	COMPRESSOR SIZES	VOLTS	CASE QTY
TQS2I	1/2HP	115	20
TQS4I	1/4HP AND 1/3HP	115	20
TQS8I	1/12HP THRU 1/5HP	115	20

NEW SoftStartHome Soft Starts



THE SOFTSTARTHOME SSH6T SOFT START IS DESIGNED FOR RESIDENTIAL AC SYSTEMS UP TO 6 TONS. SOFT STARTS RAMP UP POWER TO REDUCE INRUSH OF CURRENT TO COMPONENTS AND REDUCE POWER DEMAND ON START UP. THIS REDUCES THE STRESS ON COMPONENTS AND CAN ALLOW SYSTEMS TO BE SUPPORTED BY BACKUP POWER.

- Reduces startup power demand by up to 70%
- Quiet AC Startup
- Compatible with 115-240VAC systems

CAT. NO.	DESCRIPTION	MAXIMUM SURGE	WORKING CURRENT	CASE QTY
SSH3T	SOFT STARTER FOR 3-TON A/C UNIT	120 AMPS	18 AMPS	10
SSH6T	SOFT STARTER FOR 6-TON A/C UNIT	130 AMPS	42 AMPS	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



Emergency Metal Switch Plates

- Red with silk screened white letters



CAT. NO.	TYPE	SIZE	BOX QTY	CASE QTY
83490	OIL	UTILITY	25	100
83492	OIL	4" RAISED	10	100
83495	GAS	UTILITY	25	100
83503	GAS	4" RAISED	50	100
83500	EMERGENCY	UTILITY	25	100
83502	EMERGENCY	4" RAISED	10	100



Single Gang Weatherproof Boxes



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	FIG.	CUBIC INCH CAPACITY	NO. OF OUTLET HOLES	OUTLET HOLE DIA.	NO. OF CLOSURE PLUGS	DIMENSIONS			FINISH	BOX QTY
						L	W	D		
36090	1	18.3	3	1/2"	2	4-1/2"	2-3/4"	2"	GRAY	40
36030	2	23.8	4	1/2"	2	4-1/2"	2-3/4"	2-5/8"	GRAY	50
ONE GANG WEATHERPROOF COVER										
37130	3								GRAY	50
GFCI/DECORATOR										



Two Gang Weatherproof Boxes




FIG. 1



FIG. 2

CAT. NO.	FIG.	CUBIC INCH CAPACITY	NO. OF OUTLET HOLES	OUTLET HOLE DIA.	NO. OF CLOSURE PLUGS	DIMENSIONS			FINISH	BOX QTY
						L	W	D		
36290	1	30.5	6	1/2"	2	4-1/2"	4-1/2"	2-3/16"	GRAY	40
TWO GANG WEATHERPROOF COVER										
37250	2								GRAY	50

- Range 2 MFD to 2000 MFD
- Accuracy ±5%
- Color coded test leads
- Insulated rubber casing
- 9 Volt battery included
- Fuse protected

NEW Digital Capacitor Tester



CAT. NO.	CASE QTY
CTI	5

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Lug Motor Mounting Bracket



CAT. NO.	BOLT CIRCLE	MOUNT TYPE	DIAMETER	CASE QTY
A80293	6-7/8 TO 8-1/8"	LUG	5.5"	50

Adjustable Diameter Mounting Bracket



- Plastic insert allows you to adjust for 5" or 5-5/8" diameter
- 3-Leg Torsion-Flex Brackets
- Designed to effectively isolate and prevent torsional vibrations from reaching blower housing and causing noise
- No preassembly; bracket clamps to motor shell. Plastic inserts supplied for adapting bracket to NEMA 42 frame.

CAT. NO.	DIAMETER	CASE QTY
TFM556	5.5"	50

Blower Motor Mounting Bracket



- Bracket for 48 Frame motor in York Units
- 5.5 mounting bracket
- 11 bolt circle diameter
- Kit includes: bracket with 3 welded legs, rubber grommets and mounting hardware

CAT. NO.	MOUNT TYPE	DIRECT REPLACEMENT FOR	CASE QTY
A60459	BELLY BAND	YORK 326-31459-000 YORK 02626372000, YORK 37308073700, YORK 3730807300	108

NEW Three Leg Torsion Flex Mount Brackets



CAT. NO.	DIAMETER	CASE QTY
TFM50	5"	50
TFM55	5-5/8"	50

- 3-Leg Torsion-Flex Brackets
- Designed to effectively isolate and prevent torsional vibrations from reaching blower housing and causing noise
- No preassembly; bracket clamps to motor shell
- Includes: 3 grommets, 1 bolt, 1 nut, 3 steel washers

NEW Four Leg Torsion Flex Mount Bracket



CAT. NO.	DIAMETER	CASE QTY
TFM554	5-5/8"	50

- FOR USE WITH 5-5/8" DIAMETER MOTORS
- Helps isolate and prevent torsional vibrations from reaching blowerhousing and causing noise

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW Rubber Boots

- Lead Protectors for Motor Run Capacitors
- 5 Per Package



CAT. NO.	HOLE LOCATION	CASE QTY
A76001	1 HOLE ON TOP	50

NEW Capacitor Mounting Kit



CAT. NO.	DIMENSION		CASE QTY
	BRACKET	COVER	
A60010	2-1/8" X 1-1/4"	1-5/8"	100

NEW Rubber Grommet Kit

- Used for 3/4" Slots
- Sheet Metal
- Screws and Sleeves Included
- 3 Per Package



CAT. NO.	DESCRIPTION	CASE QTY
A60049K	LARGE RUBBER GROMMET KIT	50

NEW Capacitor Jumper Cable



- With 1/4" Female Terminals
- 10 Per Package

CAT. NO.	LENGTH	CASE QTY
A63006	6"	50

NEW Capacitor Resistor

- Fits NEMA 42, 48 or 56 frame motors
- Disc Type



CAT. NO.	OHMS	WATTS	CASE QTY
A63105	15000	2	10

NEW Condenser Fan Rainshield



- Fits NEMA 42, 48 or 56 frame motors
- Disc Type

CAT. NO.	DIMENSION		CASE QTY
	BORE	OUTSIDE DIAMETER	
A61000	0.5"	6.88"	100

NEW Fan Blade and Hub Puller

- Removes fan blades and blower wheels from rusty shafts
- Max depth of 2.4 inches
- Heavy-duty jaws



CAT. NO.	CASE QTY
A89000	8

Heavy Duty Toggle Switches - 1 Pole



- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F



CAT. NO.	FIG.	TYPE	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
SINGLE POLE SINGLE THROW											
70070	1	TOGGLE SWITCH WITH ON/OFF PLATE	SPST	ON-OFF	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70071	2	TOGGLE SWITCH WITH ON/OFF PLATE	SPST	ON-OFF	QUICK CONNECT SPADE	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70072	3	TOGGLE SWITCH IP55 RATED WATERPROOF "O" RING ON/OFF PLATE	SPST	ON-OFF	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70073	4	TOGGLE SWITCH WITH ON/OFF PLATE & BOOT	SPST	ON-OFF	6" WIRE LEADS	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.18" X 0.68" X 0.75"	1	10
SINGLE POLE DOUBLE THROW											
70080	5	TOGGLE SWITCH	SPDT	ON-OFF-ON	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70081	6	TOGGLE SWITCH	SPDT	ON-OFF-ON	QUICK CONNECT SPADE	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70090	7	TOGGLE SWITCH	SPDT	ON-ON	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70091	8	TOGGLE SWITCH	SPDT	ON-ON	QUICK CONNECT SPADE	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10

Heavy Duty Toggle Switches - 2 Pole



- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F



CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
DOUBLE POLE SINGLE THROW										
70100	1	DPST	ON-OFF	SCREW	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250V	1.30" X 0.76" X 0.80"	1	10
70101	2	DPST	ON-OFF	QUICK CONNECT SPADE	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250V	1.30" X 0.76" X 0.80"	1	10
DOUBLE POLE DOUBLE THROW										
70110	3	DPDT	ON-OFF-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
70111	4	DPDT	ON-OFF-ON	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
70130	5	DPDT	ON-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
70131	6	DPDT	ON-ON	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT: WWW.MORRISPRODUCTS.COM

Heavy Duty Toggle Switches - 3 Pole

- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTORLOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70301	3PST	ON-OFF	SCREW	6	18A 125VAC 10A 250VAC	18A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.32" X 1.09" X 1.11"	1	10
70302	3PDT	ON-ON	SCREW	9	18A 125VAC 10A 250VAC	18A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.32" X 1.09" X 1.11"	1	10
70303	3PDT	ON-OFF-ON	SCREW	9	18A 125VAC 10A 250VAC	18A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.32" X 1.09" X 1.11"	1	10

Heavy Duty Toggle Switches - 4 Pole



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTORLOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70304	1	4PST	ON-OFF	SCREW	8	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.43" X 1.40" X 1.07"	1	10
70305	2	4PDT	ON-ON	SCREW	12	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.43" X 1.40" X 1.07"	1	10
70306	3	4PDT	ON-OFF-ON	SCREW	12	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.43" X 1.40" X 1.07"	1	10

Medium Duty Toggle Switches

- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Insulation Resistance: 500V



FIG. 1



FIG. 2



FIG. 3



FIG. 4

CAT. NO.	FIG.	TYPE	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70050	1	TOGGLE WITH ON/OFF FACEPLATE WIRE LEAD	SPST	ON-OFF	6" WIRE LEADS	N/A	8A 125VAC 4A 250VAC 1/3HP 125V	0.98" X 0.62" X 0.62"	1	10
70060	2	TOGGLE WITH ON/OFF FACEPLATE	SPST	ON-OFF	SCREWS	2	6A 125VAC 3A 240VAC	0.69" X 0.57" X 0.40"	1	10
70062	3	TOGGLE SWITCH	SPST	ON-OFF	QUICK CONNECT SPADE	1	21A 12VDC	0.69" X 0.55" X 0.45"	1	10
70061	4	SHORT BALL BAT TOGGLE SWITCH WITH ON/OFF PLATE	SPST	ON-OFF	6" WIRE LEADS	N/A	6A 125VAC 3A 250VAC	0.69" X 0.55" X 0.34"	1	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT WWW.MORRISPRODUCTS.COM

Non-Metallic Toggle Switches

- Double Insulated with Internal O-Ring for Moisture and Dust Resistance
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Insulation Resistance: 500V
- () = Momentary



CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70120	1	SPST	ON-OFF	SCREW	2	20A 125VAC 10A 277VAC	1.37" X 0.76" X 0.94"	1	10
70125	2	SPDT	MOMENTARY (ON)-OFF-(ON)	QUICK CONNECT SPADE	3	20A 125VAC 10A 277VAC	1.37" X 0.76" X 0.94"	1	10
70127	3	DPDT	MOMENTARY (ON)-OFF-(ON)	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	1.37" X 0.76" X 0.94"	1	10

Heavy Duty Momentary Contact Toggle Switches



- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F
- () = Momentary



CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
SINGLE POLE SINGLE THROW										
70250	1	SPST	MOMENTARY (ON)-OFF	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.57" X 0.61"	1	10
70252	1	SPST	MOMENTARY ON-(OFF)	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.57" X 0.61"	1	10
DOUBLE POLE SINGLE THROW										
70260	2	DPST	MOMENTARY ON-(OFF)	SCREW	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125/250VAC	1.30" X 0.76" X 0.80"	1	10
70262	2	DPST	MOMENTARY (ON)-OFF	SCREW	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 277VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
SINGLE POLE DOUBLE THROW										
70270	3	SPDT	MOMENTARY ON-OFF-(ON)	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125/250VAC	1.13" X 0.63" X 0.70"	1	10
70280	3	SPDT	MOMENTARY (ON)-OFF-(ON)	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4 HP 125-250VAC	1.13" X 0.63" X 0.70"	1	10
DOUBLE POLE DOUBLE THROW										
70290	4	DPDT	(ON)-OFF-(ON)	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.32" X 0.75" X 0.86"	1	10
70299	5	DPDT	MOMENTARY (ON)-OFF-(ON)	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.30" X 0.76" X 0.86"	1	10
70300	6	DPDT	MOMENTARY (ON)-OFF-(ON)	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.30" X 0.76" X 0.86"	1	10
70135	6	DPDT	MOMENTARY (ON)-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.30" X 0.76" X 0.86"	1	10

Accessories



- RUBBER COVER AND NUT**
For Toggle Switches
- Protects switches from moisture, dirt, salt & spray
 - Built-in nut base
 - Fits Standard Toggles



- RUBBER COVER**
For Push Button Switches
- Clear Cover
 - Protects switches from moisture, dirt, salt & spray
 - Fits Standard Push Switch



- Toggle Switch Indicator Plate**
- Accessory to indicate On-Off
 - Fits Standard Toggle Switch

CAT. NO.	BAG QTY
70240	10
70241	100

CAT. NO.	BAG QTY
70243	10

CAT. NO.	BAG QTY
70246	100



- Nylon 6/6 Frame & Actuator
- Contact Resistance: 50 milliohm
- Insulation Resistance: 100 milliohm
- Dielectric Strength: 1500V
- Insulation Resistance: 100 milliohm
- Operating Temp: -4°F to 185°F
- () = Momentary

CAT. NO.	FIG.	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
ROCKER SWITCH											
70171	1	ON-OFF	BLACK	SPST	QUICK CONNECT SPADE	2	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70172	1	ON-OFF	BLACK	DPST	QUICK CONNECT SPADE	4	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70173	1	ON-OFF-ON	BLACK	SPDT	QUICK CONNECT SPADE	3	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70174	1	ON-OFF-ON	BLACK	DPDT	QUICK CONNECT SPADE	6	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70175	1	(ON)-OFF-(ON)	BLACK	DPDT	QUICK CONNECT SPADE	6	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
LIGHTED ROCKER SWITCH											
70176	2	ON-OFF	BLACK/ RED LIGHT	DPST	QUICK CONNECT SPADE	4	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70177	3	ON-OFF	BLACK/ AMBER LIGHT	DPST	QUICK CONNECT SPADE	4	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
APPLIANCE ROCKER SWITCH											
70180	4	ON-OFF	BLACK	SPST	QUICK CONNECT SPADE	2	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
70181	5	ON-OFF-ON PRINTED DOT	BLACK	SPDT	QUICK CONNECT SPADE	3	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
70182	6	ON-ON	BLACK	SPDT	QUICK CONNECT SPADE	3	20A 125VAC 16A 250VAC	20A 125VAC 16A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
LIGHTED APPLIANCE ROCKER SWITCH											
70190	7	ON-OFF	RED	SPST	QUICK CONNECT SPADE	3	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
DUAL COLOR ROCKER SWITCH											
70191	8	ON-OFF	RED/ BLACK	SPST	QUICK CONNECT SPADE	2	20A 125VAC 16A 250VAC	20A 125VAC 16A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
MINIATURE LIGHTED ROCKER SWITCH											
70192	9	ON-OFF	RED	SPST	QUICK CONNECT SPADE	3	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	0.83" X 0.59" X 0.50"	1	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT WWW.MORRISPRODUCTS.COM

Rotary Switches



- Rotary Canopy Type Switches
- Household Appliances, Fixtures & Lamps

CAT. NO.	FIG.	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO. OF TERMINALS	RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70220	1	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.97" X 0.8" X 0.37"	1	10
70222	2	ON-OFF	BLACK	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.96" X 0.79" X 0.36"	1	10
70230	3	OFF-ON(A)-ON(B)-ON(A+B)	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.86" X 1.03" X 0.34"	1	10
70422	4	ON-OFF	BLACK	SPST	6" LEADS	N/A	3 AMPS 125VAC 1.5 AMPS 250VAC	0.60" DIA X 0.73" HT	1	10

Push Buttons



- Momentary Contact
- Maintained Contact
- Appliances, Fixtures
- () = Momentary

CAT. NO.	FIG.	TYPE	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO. OF TERMINALS	RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70140	1	MOMENTARY CONTACT PUSH	(ON)-OFF	BLACK	SPST	SCREW	2	6 AMPS 120VAC 3 AMPS 240VAC	0.88" X 0.54" X 0.35"	1	10
70150	2	MOMENTARY CONTACT PUSH	ON-(OFF)	RED	SPST	SCREW	2	3 AMPS 120VAC 1.5 AMPS 240VAC	0.88" X 0.54" X 0.35"	1	10
70160	3	MAINTAINED CONTACT PUSH	ON-OFF	BLACK PLASTIC	SPST	6" LEADS	N/A	8 AMPS 125VAC 4 AMPS 250VAC 1/3HP 125VAC	0.98" X 0.60" X 1.61"	1	10
70161	4	MAINTAINED CONTACT PUSH	ON-OFF	NICKEL	SPST	6" LEADS	N/A	8AMPS 125VAC 4AMPS 250VAC 1/3HP 125VAC	0.98" X 0.63" X 0.69"	1	10
70200	5	MAINTAINED CONTACT PUSH	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.97" X 0.80" X 0.36"	1	10
70210	6	MAINTAINED CONTACT PUSH	ON-OFF	NICKEL	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.97" X 0.80" X 0.36"	1	10
70165	7	MINIATURE PUSH BUTTON	ON-OFF	BLACK	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.73" X 0.54" X 0.93"	1	10

Pull Chains




- Use for ceiling fixtures, lamps & fans
- Wire leads #18 AWG, 6" stripped wire
- Push-in connectors for #18 AWG wire
- 13/32" diameter mounting hole

CAT. NO.	FIG.	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO. OF TERMINALS	RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70010	1	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 0.825" X 0.625"	1	10
70011	1	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 0.825" X 0.625"	100	—
70020	1	ON-OFF	NICKEL	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 0.825" X 0.625"	1	10
70023	2	ALL ANGLE OFF-ON	NICKEL	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	2.52" X 1.50" X 0.50"	1	10
70045	3	2-SPEED OFF-ON-ON	BRASS	SPDT	PUSH IN	3	6 AMPS 125VAC 3 AMPS 250VAC	1.71" X 1.23" X 0.72"	1	10
70025	4	OFF-ON(A)-ON(B)-ON(A+B)	BRASS	SPTT	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 1.00" X 0.625"	1	10
70040	5	OFF-ON(A)-ON(B)-ON(A+B)	BRASS	SPTT	PUSH IN	4	6 AMPS 125VAC 3 AMPS 250VAC	1.50" X 1.25" X 0.75"	1	10

Rectangular Indicator Pilot Lamp


- 250VAC Incandescent
- Insulation Resistance: 100 milliohm
- Dielectric Strength: 3000VAC
- Lamp Life Expectancy: > 10,000 Hrs
- -13°F to 185°F
- Nylon 6/6 Housing with Polycarbonate Lens
- Brass Terminals




CAT. NO.	COLOR	RATING	TERMINATION	BAG QTY
70310	GREEN	250VAC	SPADE	10
70311	RED	250VAC	SPADE	10
70312	AMBER	250VAC	SPADE	10

Round Indicator Pilot Lamp

- Incandescent
- Insulation Resistance: 100 milliohm
- Dielectric Strength: 3000VAC
- Lamp Life Expectancy: > 10,000 Hrs
- -13°F to 185°F
- Nylon 6/6 Housing with Polycarbonate Lens
- Brass Terminals
- 0.47" Shaft Diameter

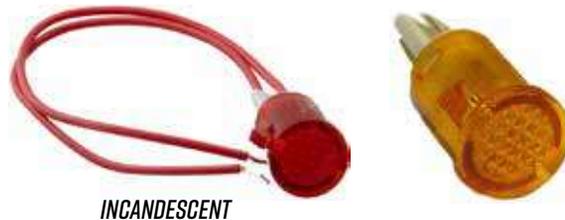

INCANDESCENT



CAT. NO.	COLOR	RATING	TERMINATION	BAG QTY
70320	GREEN	250VAC	QUICK CONNECT	10
70321	RED	250VAC	QUICK CONNECT	10
70322	AMBER	250VAC	QUICK CONNECT	10
70325	AMBER	125VAC	6" WIRE LEADS	10
70326	GREEN	24VDC	6" WIRE LEADS	10
70327	RED	24VDC	6" WIRE LEADS	10
70328	AMBER	24VDC	6" WIRE LEADS	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT WWW.MORRISPRODUCTS.COM

Manifold Gauge



DiversiTech's MG-1 Manifold Gauge provides the technician with a precision diagnostic and monitoring analog gauge set complete with hoses.

- The Manifold Gauge and Hose Set includes:
 - 2 valve brass manifold
 - 5' long high pressure hose set
- For use with the following refrigerants:
 - R-410A
 - R-22
 - R-407C
- Detailed gauge readings in PSI °F

CAT. NO.	DESCRIPTION	CASE QTY
MG-1	MANIFOLD GAUGE AND HOSE SET	10

Portable Hand Torch



- Self igniting hand torch eliminates the need for a flint lighter.
- Lightweight and portable.
- Can be operated with Propane or MAP-Pro™ (Propylene).
- Features trigger lock with instant safety release.
- Full size comfort grip.
- 360° swivel tip.
- Operates in any position, even upside down.
- Includes swirl combustion tip end.

CAT. NO.	DESCRIPTION	CASE QTY
525-TORCH	PORTABLE HAND TORCH	25

Multi Color Test Leads



- Easy to use multi-colored test leads.
- 5 colors (white, red, black, yellow, green).
- 2 connections each for easy testing on the job.
- Wire is 18 gauge.
- 18" long.

CAT. NO.	DESCRIPTION	CASE QTY
CT800	MULTI COLOR TEST LEADS	150

Map-Pro and Propane Gas



525-MT1

525-PT1

- Map-Pro and Propane Gas are tanks that can be used to weld products.

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
525-MT1	MAP-PRO GAS - 14 OZ.	12	12
525-PT1	PROPANE GAS - 14.1 OZ.	12	12

The SWOOSH® Drain Gun® Big Shot™

- Larger 20 gram SWOOSH® CO2 cartridges deliver 800 PSI of oil free air to clear the line, with 25% more capacity
- Each unit comes equipped with a tapered fitting to work on 3/8in. - 3/4in. drain openings
- Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains



CAT. NO.	DESCRIPTION	CASE QTY
SG-1	DRAIN GUN™ FOR A/C CONDENSATE LINES	6
SGC-12	SWOOSH BIG SHOT CO2 CARTRIDGES	6

Drain Gun™ - SWOOSH CO2 Cartridges

- Lightweight (3 oz.) portable tool designed to blow out drain lines instantly
- Each unit comes equipped with a tapered fitting to work on 3/8in. - 3/4in. drain openings
- Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains
- Cartridges are environmentally safe and recyclable



CAT. NO.	DESCRIPTION	CASE QTY
GG-1	DRAIN GUN™ FOR A/C CONDENSATE LINES	6
GGC-12	SWOOSH CO2 CARTRIDGES, PACK OF 12	6

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW *CoilJet HVAC Coil Cleaner System*



- Powerful 125 psi spray will efficiently clean coil debris and grime from both sides of condenser and evaporator coils
- 0.6 gallon per minute flow rate won't overflow the indoor AC evaporator coil condensate line
- Deep cycle, 12V Rechargeable battery makes it easy to clean virtually any coil, indoors or outdoors all day
- Separate on-board water and cleaner tanks eliminate the need for dragging hoses or bulky pump sprayers to clean coils
- Includes: CoilJet System, 2 standard spray nozzles, rechargeable battery, and AC charger
- Compatible with TCJ-MSB-ACC-KIT Mini-Split Cleaning Accessory Kit. (Sold Separately)

CAT. NO.	VOLTS	AMPS	MAX FLOW RATE	WORKING PRESSURE	CASE QTY
CJ-125	12	15	42	125 PSI	1

NEW *Mini-Split Cleaning Assessor Kit*



- Ducted and Ductless Cleaner
- 24" Cleaning Wand with 90 Degree Spray Head
- 12" Flexible Cleaning Wand with 0 and 25 Degree Spray Head
- For use with TCJ-125 CoilJet Coil Cleaner System (Sold Separately)

CAT. NO.	DESCRIPTION	CASE QTY
CJ-MSB-ACC-KIT	MINI SPLIT ACCESSORY KIT	1

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

NEW *Mini-Split Bib Kit*

QUICKLY AND SAFELY CLEAN VIRTUALLY ANY MINI-SPLIT SYSTEM (30" TO 44") THE CORRECT WAY, BY USING PRESSURIZED WATER ON COILS AND FANS. THIS PATENTED TECHNOLOGY KEEPS WATER AWAY FROM WALLS AND OTHER SURROUNDINGS WHILE DIRECTING IT INTO THE 5-GALLON BUCKET FOR DISPOSAL. EASY TO SET UP AND MOVE FROM JOB TO JOB. INCLUDES 8' DRAIN LINE FOR HIGH MOUNTED EVAPORATORS.

PRODUCT SPECIFICATIONS:
 FITS DUCT FAN UNITS UP TO 44" WIDE
 DRAIN LINE LENGTH 8 FT.
 BIB MATERIAL THICKNESS 4 MIL
 DIMENSIONS 36" X 16"
 WEIGHT 1.5 LBS.



CAT. NO.	DESCRIPTION	CASE QTY
MSB-KIT	MINI-SPLIT BIB KIT	1

NEW *Mini-Split Bib Kit Extra Large*

EXTRA-LARGE BIB KIT FITS VIRTUALLY ANY COMMERCIAL BRAND DUCTLESS FAN UNIT 45" TO 60" WIDE. COMPLETE KIT INCLUDES: BIB, ADJUSTABLE MOUNTING BRACKETS, 1 ROLL OF PROTECTIVE TAPE, 2 DEFLECTOR PLATES (XL KIT INCLUDES 3) AND 5 GALLON BUCKET.

PRODUCT SPECIFICATIONS:
 FITS DUCT FAN UNITS 44" - 66" WIDE
 DRAIN LINE LENGTH 8 FT.
 BIB MATERIAL THICKNESS 4 MIL
 DIMENSIONS 52" X 16"
 WEIGHT 1.5 LBS.



CAT. NO.	DESCRIPTION	CASE QTY
MSB-KIT-XL	MINI-SPLIT BIB KIT	1

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED. FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Tongue and Groove Pliers



545-440



545-430

- Patented design pliers.
- Permalock fasteners.
- Reinforcing edge.
- The grips are also dipped in plastic for a more comfortable hold.

CAT. NO.	DESCRIPTION	CASE QTY
545-420	9-1/2" TONGUE AND GROOVE PLIERS	5
545-422	9-1/2" CURVED JAW TONGUE AND GROOVE PLIERS	5
545-426	6-1/2" TONGUE AND GROOVE PLIERS	5
545-430	10" TONGUE AND GROOVE PLIERS	5
545-440	12" TONGUE AND GROOVE PLIERS	5
545-442	12" CURVED JAW TONGUE AND GROOVE PLIERS	5
545-460	16" TONGUE AND GROOVE PLIERS	2

Economy Stripper/Wire Cutter



IE-178



IE-182

- Precision-ground stripping stations.
- Serrated pliers nose for pulling and working wire.
- Scissors-action cutter.
- Holes in jaw for looping wire.
- Return spring.
- Cushion grips.

CAT. NO.	SIZE	DESCRIPTION	WIRE AWG	CASE QTY
IE-178	6"	CUT/STRIP 16-26 AWG	#16 - #26 STR	10
IE-182	6"	CUT/STRIP 10-20 AWG	#10 - #20 STR	10

5-IN-1 Combination Tool



IE-110

- Strips: 22/20/18/16/14/12/10 AWG
- Crimps Insulated and Non-Insulated: 22-18, 16-10 AWG;
- Screw Cutter: 4-40/5-40/6-32/8-32/10-32/10/24
- Serrated Pliers Nose for Pulling & Looping Wire
- Air-Pocket Cushion grips.

CAT. NO.	SIZE	DESCRIPTION	WIRE AWG	CASE QTY
IE-110	8-1/4"	CUT/CRIMP/STRIP/PLIERS	#10 - #22	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

SuperStripper - Cut/Crimp/Strip

- Pliers nose for working small nuts and pulling wire.
- Precision-ground stripping stations for both solid and stranded wire.
- Long, curved cutter requires less force to cut.
- Holes in jaw for looping wire.
- Lock to protect cutting and stripping edges when stored.
- Return spring and opening stop to prevent spring from becoming disengaged.
- Longer handles for greater leverage, cuts 6-32 / 8-32 screws.
- Ergonomic handle design.



CAT. NO.	SIZE	DESCRIPTION	WIRE AWG	CASE QTY
IE-155	7-1/4"	5:1 STRIPPER CRIMPER	#10 - #18 SOL #12 - #20 STD	10

NM-B Stripper - Cut/Strip/Pliers

- For 12-2 and 14-2 type NM-B cable
- Patented precision-ground stripping stations
- "Staggered" cutting blade produces a clean, sure cut with 30-50% less effort
- Features serrated pliers nose & wire looping holes
- 6-32 / 8-32 screw cutters
- Spring return & locking mechanism
- Tool markings have been redesigned to be easier to read
- Includes air-pocket cushion grips for comfort



CAT. NO.	SIZE	DESCRIPTION	WIRE AWG	CASE QTY
IE-123	7-3/4"	NM CUT/CRIMP/STRIP	12/2 - 14/2 #12 - #14	10

Heavy Duty Stripper/Wire Cutter

- Serrated pliers nose for pulling and working wire, small nuts, etc.
- AWG and metric wire sizes are embossed in steel and pad printed for high visibility.
- 2-piece hardened steel pivot for lifetime service.
- Lock to protect cutting and stripping edges when stored.
- Spring return to help speed work.
- Large air-pocket cushion grips for greater comfort.



CAT. NO.	SIZE	DESCRIPTION	WIRE AWG	CASE QTY
IE-120	6-1/4"	CUT/STRIP 10-20 AWG	#10 - #20 SOL	10
IE-125	6-1/4"	CUT/STRIP 16-26 AWG	#16 - #26 STR	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Ultraviolet Black Nylon Cable Ties



- Carbonate 'A' added for greater resistance to Ultra Violet in outdoor usage
- Made from UL approved Nylon 6/6
- Normal service temperature range: -40°F to 185°F (-40°C to 85°C)
- Flammability Rating: UL94V-2
- Packed in Sealed Plastic Bags

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAXIMUM BUNDLE DIAMETER	BAG QTY	MASTER BAG QTY
20236	40	8"	0.125"	2.17"	100	1,000
20258	50	14-1/2"	0.187"	4.02"	100	1,000
20285	175	24"	0.351"	7.28"	100	100

Ultraviolet Black Nylon Cable Ties - 1000 Piece Bulk Pack



CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAXIMUM BUNDLE DIAMETER	BAG QTY
20170	50	14-1/2"	0.189"	4.13"	1,000

Air Handling Cable Ties For Plenum Areas



- Meets UL 2043 for use in air handling spaces
- Generates low smoke & offers low heat release
- Burgundy Color
- 50 Lb. Tensile strength
- UL 62275 Listed Type 21 AH-2 for use in Air Handling Spaces (Plenums)

CAT. NO.	TENSILE STRENGTH (LBS.)	DIMENSIONS		MAX BUNDLE DIA.	BAG QTY	CASE QTY
		LENGTH	WIDTH			
20982	50	7.5"	0.19"	2"	100	5,000
20984	50	11"	0.19"	3"	100	5,000
20986	50	14.8"	0.19"	4"	100	5,000

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR MORE INFORMATION ON THE MORRIS PRODUCTS LINE VISIT: WWW.MORRISPRODUCTS.COM

Hose Clamps

- Stainless steel housings and bands
- The screws are plated steel and have slotted hex heads allowing a socket wrench, nut driver, or screwdriver to be used



CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
B-4H	NO. 4, 7/32" - 5/8" DIA., 3/16" - 5/16" HOSE I.D.	10	10
B-6H	NO. 6, 3/8" - 7/8" DIA., 1/4" - 3/8" HOSE I.D.	10	10
B-8H	NO. 8, 7/16" - 1" DIA., 5/16" - 1/2" HOSE I.D.	10	10
B-10H	NO. 10, 9/16" - 1-1/16" DIA., 3/8" - 5/8" HOSE I.D.	10	10
B-12H	NO. 12, 9/16" - 1-1/4" DIA., 5/8" - 3/4" HOSE I.D.	10	10
B-16H	NO. 16, 11/16" - 1-1/2" DIA., 3/4" - 1" HOSE I.D.	10	10
B-20H	NO. 20, 3/4" - 1-3/4" DIA., 1" - 1-1/4" HOSE I.D.	10	10
B-24H	NO. 24, 1-1/16" - 2" DIA., 1-1/4" - 1-1/2" HOSE I.D.	10	10
B-28H	NO. 28, 1-5/16" - 2-1/4" DIA., 1-1/4" - 1-3/4" HOSE I.D.	10	10
B-32H	NO. 32, 1-9/16" - 2-1/2" DIA., 1-1/2" - 2" HOSE I.D.	10	10
B-36H	NO. 36, 1-13/16" - 2-3/4" DIA., 1-3/4" - 2-1/4" HOSE I.D.	10	10

Compressor Repair Kit Cartridges

- Fits Both Burned and Unburned Terminals
- Connects to Compressor Through Brass Cylinders
- 600 Volt, 65 Strand Machine Wire



CAT. NO.	DESCRIPTION	CASE QTY
TLC-3-8	3 WIRE, 8 GAUGE CONNECTION KIT	50
TLC-3-10	3 WIRE, 10 GAUGE CONNECTION KIT	75
TLC-3-12	3 WIRE, 12 GAUGE CONNECTION KIT	125

Strapping Hanger Iron

- Galvanized 3/4 in. vent strapping, hanger iron, plumber's tape, pipe hanger tape and many other uses.
- 1/4 in. centers for bolts or nails.



CAT. NO.	DESCRIPTION	CASE QTY
710-A1710	10' ROLLS - 28 GAUGE	50
710-A1650	50' ROLLS - 28 GAUGE	10
710-A16100	100' ROLLS - 28 GAUGE	10

Ratchet Strap

- Easy ratcheting permits tie-down of appliances securely.
- An innovative latch and a fast release cam reduces socket wear.
- Cadmium-plated steel buckle has a positive lock that eliminates release due to vibration.
- When closed, the handle locks the latch into the sprocket to prevent inadvertent release.
- 16' nylon webbing rated at 3000 PSI tensile.
- Vinyl coated end hooks rated at 1200 PSI tensile.



CAT. NO.	DESCRIPTION	CASE QTY
HS-192	RATCHET STRAP - 16'	3

WWW.MORRISPRODUCTS.COM

NEW

Flexible Aluminum Duct



CAT. NO.	DESCRIPTION	CASE QTY
650-011	4" X 8' FLEXIBLE ALUMINUM DUCT	9

Concentric Ven[®]

- Requires Only 1 Roof Penetration for High Efficiency Furnaces
- Simplifies Installation
- Conforms to ANSI/ASTM Standards



CAT. NO.	DESCRIPTION	CASE QTY
CVENT-2	2" CONCENTRIC VENT	1
CVENT-3	3" CONCENTRIC VENT	1
CVENT-4	4" CONCENTRIC VENT	1

Duct Strap - Woven Polypropylene



- Webbed duct strap possessing high tensile and abrasion resistance
- Can be used for flex duct as it is easy to cut and staple to joists
- Chemical resistant.
- Listed to spec 2040
- UL Listed



CAT. NO.	DESCRIPTION	CASE QTY
710-100	DUCT STRAP - 1-3/4" X 100 YARDS - BLACK	24
710-102	DUCT STRAP - 3" X 100 YARDS - BLACK	8

Hanging Strap



- Strong, versatile, easy way to secure loose gear safely.
- Tie down ladders, tubing, cylinders or almost anything in seconds.
- Cannot snap back.
- Strong, durable 1" polypropylene webbing.
- Reinforced grommet lets you hang it up, tie it up, hook it up or attach it permanently.
- Spring loaded adjustable buckle.
- Easy to get firm tension with no slipping.
- Make an endless length by connecting 2 or more together.

CAT. NO.	DESCRIPTION	CASE QTY
HS-30	HANGING STRAP - 30"	24
HS-60	HANGING STRAP - 60"	24

1-888-777-6678

25 Year Acrylic Latex Painter's Caulk



- For both interior and exterior use.
- Forms a tough, paintable resilient bond to all building material surfaces.
- Excellent resistance to water, weathering and moisture vapor.

CAT. NO.	DESCRIPTION	CASE QTY
7-4500	WHITE ACRYLIC LATEX CAULK - 10.1 OZ. CARTRIDGE	12

Foam Sealant - One Component



- One component closed-cell expanding polyurethane foam sealant for lineal caulking applications.
- Air-moisture cure.
- Tack free in 20 minutes; fully cured in 12 hours.
- Paintable.
- Use for insulating and sealing around windows, doors, pipes, ducts and vents.
- Non-toxic when cured.
- Paint to protect from UV exposure.
- "R" value 4.7 (1" thickness).
- Foam contains fire retarding chemical and is U.L. Listed but not rated as a firestop product. Environmental concerns have led us to replace CFC's and HCFC's with hydrocarbon material in our one component foam products.
- See instructions on each product to ensure safe use and quality results.

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
01714M*	FOAM SEALANT - 12 OZ. CAN - YIELDS 275' (3/8" BEAD)	12	12

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

Black Jack® Roof Cement



Black Jack® All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
RM-1Q	BLACK JACK ALL WEATHER ROOF CEMENT - 10 OZ. TUBE	12	12
RM-1Q	BLACK JACK ALL WEATHER ROOF CEMENT - 1 QUART	6	6
TRM-1G	BLACK JACK ALL WEATHER ROOF CEMENT - 1 GALLON	6	6

DiversiGum Duct Seal



- Non-hardening
- For plugging openings through foundations or around refrigeration tube entry

CAT. NO.	DESCRIPTION	CASE QTY
6-202-1	DIVERSIGUM DUCT SEAL- 1 LB. SLUG	24

Pro-Air Duct Sealant UL 181 AM-BM Listed



- Water-based fiber-reinforced duct sealant/mastic formulated for indoor/outdoor use
- Meets U.L. Class 1 rating
- Use on metal heating, ventilating, and A/C duct systems; as well as fiberglass duct board systems and flex duct systems

CAT. NO.	DESCRIPTION	CASE QTY
800-009	PRO-AIR DUCT SEALANT - 1 GALLON PAIL	4

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Flex Duct Tape

- Specially designed to meet new UL1818 FX code for flex duct, for superior performance in extreme environments. (35°F to 260°F)
- Higher adhesion and tack than traditional cloth duct tapes.
- Conformable, hand tearable foil.
- 3 mil thickness.
- 2 in. x 120 yds.
- Code identification printed on the tape.
- Acrylic adhesive



CAT. NO.	DESCRIPTION	CASE QTY
640-FD2S	SILVER - 2"	24
640-FD3S	SILVER - 3"	16

Aluminum Foil Tape

- Prevents heating and cooling losses.
- Blocks odors and moisture.
- Use for HVAC and refrigeration systems
- Easy to handle.
- 35°F to plus 260°F working temperatures.
- 3-5 year shelf life.
- Made in USA.



CAT. NO.	DESCRIPTION	CASE QTY
640-AF2	2" 50 YDS.	24

Cork Insulation Tape

- Adheres firmly to all metals.
- Use on hot or cold pipes to stop condensation and drips



CAT. NO.	DESCRIPTION	CASE QTY
6-330	1/8" X 2" X 30' ROLL - BLACK	12

Sure-Stick Heavy Duty Adhesive Spray

- Wide web spray adhesive ideal for both temporary or permanent bonding.
- Waterproof, transparent and non-staining.
- Use for the toughest adhesive applications with leather, cardboard, most plastics, polyethylene sheeting and insulation in HVAC applications.
- Cleans with mineral spirits.
- Not for use on vinyl.



CAT. NO.	DESCRIPTION	CASE QTY
315-20	12 OZ. AEROSOL	12



General Purpose Vinyl Electrical Tape

- 3/4" X 60ft X 7Mil
- Used for Protective Jacketing & Bundling/Harnessing
- Resistant to Acids, Alkalis, Chemicals, Oils, Moisture, Sunlight & Corrosion
- Flame Retardant and Weather Resistant
- UL 510 & CSA Approved
- Lead Free
- 600V



COMPARABLE TO 3M 1700

CAT. NO.	COLOR	PACKAGE TYPE	SLEEVE QTY	CASE QTY
60000	BLACK	CELLO	10	100
60010	RED	CELLO	10	100
60020	WHITE	CELLO	10	100
60030	YELLOW	CELLO	10	100
60040	GREEN	CELLO	10	100
60050	BLUE	CELLO	10	100
60060	BROWN	CELLO	10	100
60070	ORANGE	CELLO	10	100
60080	GRAY	CELLO	10	100
60090	VIOLET	CELLO	10	100

Stick-E-Tape

- Self adhesive aluminum tape with temperature range of 40° F to 200°F.
- Easily painted.
- Excellent vapor barrier.
- Effective UV and water shield over urethane foam.
- Preferred duct and pipe wrap.



CAT. NO.	DESCRIPTION	CASE QTY
50302M*	STICK-E-TAPE - AFT-701-2 - 2" X 50' ROLL	24

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

PTFE Tape

- Made of pure white PTFE.
- Non toxic.
- For use with chemicals, solvents, oxygen, and on food lines.
- Withstands up to 2000 psi of pressure.



CAT. NO.	DESCRIPTION	CASE QTY
6-733	TEFLON TAPE - 1/2" X 520"	100

Foam Insulation Tape

- Superior self-adhesive foam tape can be used on hot or cold pipes
- Fits well around valves and fittings.
- Easily cut and molded



CAT. NO.	DESCRIPTION	CASE QTY
6-9718	1/8" X 2" X 30' ROLL - BLACK	12

NEW *Pro-Weld Clear Cleaner*



- Fast acting Solvent Cleaner that Cleans all Classes and Schedules of PVC, CPVC and ABS Pipe and Fittings
- Formulated to Clean and Remove the Surface Dirt, Grease and Oil from the Pipe and Fitting Joining Surfaces
- Meets Low-VOC 4mission Limit as Outlined by South Coast Air Quality Management District

CAT. NO.	SIZE	CASE QTY
PWCC-32	32 OUNCES	12

NEW *Pro-Prime Purple Primer*



- For use with all PVC and CPVC Installations
- Deeply Penetrates and Softens Pipe to Allow for Strong Weld
- Recommended application temperature 40°F to 110°F / 4°C to 43°C

CAT. NO.	SIZE	CASE QTY
PP-8	8 OUNCES	24
PP-16	16 OUNCES	12
PP-32	32 OUNCES	12
PP-6	1 GALLON	6

NEW *Pro-Prime Clear Primer*



- For use with all PVC and CPVC Installations
- Deeply Penetrates and Softens Pipe to Allow for Strong Weld
- Recommended application temperature 40°F to 110°F / 4°C to 43°C

CAT. NO.	SIZE	CASE QTY
PPC-8	8 OUNCES	24
PPC-16	16 OUNCES	12
PPC-32	32 OUNCES	12

NEW Pro-Weld Clear Regular Body Cement

- Fast Setting PVC Cement for All Schedules of PVC Pipe up to 4"
- Recommended application temperature 40°F to 110°F / 4°C to 43°C
- Meets Low-VOC emission limit as outlined by South Coast Air Quality Management District
- Listed by NSF International for compliance with ASTM D 2564, the Uniform Plumbing Code

CAT. NO.	SIZE	CASE QTY
PW-4	4 OUNCES	24
PW-8	8 OUNCES	24
PW-16	16 OUNCES	12
PW-32	32 OUNCES	12
PW-G	1 GALLON	6



NEW Pro-Weld Clear Medium Bodied Universal Cement

- Fast Setting PVC Cement for All Schedules of PVC Pipe up to 4"
- Recommended application temperature 40°F to 110°F / 4°C to 43°C
- Meets Low-VOC emission limit as outlined by South Coast Air Quality Management District
- Listed by NSF International for compliance with ASTM D 2564, the Uniform Plumbing Code

CAT. NO.	SIZE	CASE QTY
PWM-8	8 OUNCES	24
PWM-16	16 OUNCES	12
PWM-32	32 OUNCES	12
PWM-G	1 GALLON	6



NEW Pro-Weld Gray Medium Bodied Universal Cement

- Fast Setting PVC Cement for All Schedules of PVC Pipe up to 4"
- Recommended application temperature 40°F to 110°F / 4°C to 43°C
- Meets Low-VOC emission limit as outlined by South Coast Air Quality Management District
- Listed by NSF International for compliance with ASTM D 2564, the Uniform Plumbing Code

CAT. NO.	SIZE	CASE QTY
PWMG-32	32 OUNCES	12
PWMG-G	1 GALLON	6



NEW *Pro-Weld Clear Heavy Body Cement*



- Medium Speed Setting PVC Cement for use on all Schedules and Classes of PVC Pipe and Fittings up to 12"
- Recommended application temperature 40°F to 110°F / 4°C to 43°C
- Meets Low-VOC emission limit as outlined by South Coast Air Quality Management District
- Listed by NSF International for compliance with ASTM D 2564, the Uniform Plumbing Code

CAT. NO.	SIZE	CASE QTY
PWH-8	8 OUNCES	24
PWH-16	16 OUNCES	12
PWH-32	32 OUNCES	12

NEW *Pro-Weld Clear Cold Weather Cement*



- Medium Speed Setting PVC Cement for use on all Schedules and Classes of PVC Pipe and Fittings up to 12"
- Recommended application temperature 40°F to 110°F / 4°C to 43°C
- Meets Low-VOC emission limit as outlined by South Coast Air Quality Management District
- Listed by NSF International for compliance with ASTM D 2564, the Uniform Plumbing Code

CAT. NO.	SIZE	CASE QTY
PWW-16	16 OUNCES	12
PWW-32	32 OUNCES	12
PWW-6	1 GALLON	6

NEW *Pro-Weld Blue Fast Setting Cement for Wet Applications*



- Extremely Fast Setting Cement for PVC Pipe Up to 6" (Schedule 40) or 4" (Schedule 80)
- Designed for Use in Wet Conditions or Where Pressurization of Piping Is Required
- Meets Low-VOC emission limit as outlined by South Coast Air Quality Management District
- Listed by NSF International for compliance with ASTM D 2564, the Uniform Plumbing Code

CAT. NO.	SIZE	CASE QTY
PWB-32	32 OUNCES	12

QD[®] Contact Cleaner

- Suitable for cleaning sensitive electronics and electrical equipment and does not leave any residue.
- Evaporates quickly and safe to use on all plastics.
- More useful where lower flashpoint cleaners are acceptable.
- NSF K2 Registered.



CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
CRC-4CF	QD [®] CONTACT CLEANER - 11 OZ.	12	12

HF[™] Contact Cleaner

- Petroleum distillate based precision cleaner with a flash point of 205°F.
- Alternative to CFCs when applications require higher flashpoints.



CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
CRC-4-140	HF [™] CONTACT CLEANER - 11 OZ.	12	12

White Lithium Grease

- White Lithium Grease has superior lubrication and durability in any weather or temperature.
- Useful as a break in lubricant for bearings.
- General purpose lubricant and corrosion inhibitor for tools, machinery and equipment.



CAT. NO.	SIZE	CASE QTY	ORDER MULTIPLE
CRC-9	10 OZ.	12	12

Ultra Lite 3-36[®] Ultra Thin Non Staining Lubricant

- Ultra thin, non staining lubricant that resists oil, dirt and dust build up.
- Seals out moisture and protects against corrosion.
- Excellent for drying out electrical components.



CAT. NO.	SIZE	CASE QTY	ORDER MULTIPLE
CRC-1	11 OZ.	12	12

WD-40[®]

- Loosens rusted parts.
- Stops squeaks.
- Removes tar, grease and adhesives.
- Displaces moisture.
- Protects metal.
- New Smart Straw can.



CAT. NO.	SIZE	CASE QTY	ORDER MULTIPLE
74I-001	WD-40 - 8 OZ.	12	12
74I-002	WD-40 - 11 OZ.	12	12

Zinc-It[®] Instant Cold Galvanize[™] Zinc Rich Galvanize Coating

- High-performance zinc coating that electrochemically bonds with ferrous metals to form a galvanic cell.
- Fights rust and corrosion and can be used as a touch-up for damaged galvanized coatings.
- Dries quickly.



CAT. NO.	SIZE	CASE QTY	ORDER MULTIPLE
CRC-5	13 OZ.	12	12

High Heat Spray Paint



- Ultra high temperature coating formulated to resist temperatures up to 1300°F.
- Great for use on boilers, furnaces, steam pipes, chimney collars, compressors and engine manifolds.
- Meets most recent VOC legislation and is currently compliant.

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
799-041	BLACK - 12 OZ.	6	6

Fast Orange[®] Hand Cleaner



THCO-7



THCO-15

- Three out of five people prefer Fast Orange[®] over other hand cleaners.
- Biodegradable.
- Waterless.
- Aloe, lanolin, and jojoba.
- Smooth lotion and extra-fine pumice available.
- USDA Approved.

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
HCO-7	7-1/2 FL. OZ. SMOOTH SQUEEZE BOTTLE	12	12
HCO-15	15 OZ. SMOOTH SQUEEZE BOTTLE	12	12
HCP-7	7-1/2 FL. OZ. PUMICE SQUEEZE BOTTLE	12	12
HCP-15	15 OZ. PUMICE SQUEEZE BOTTLE	12	12

Wasp & Hornet Killer by ENFORCER



8-WH16



8-FWH16

- 20-foot jet blast for instant knockdown of wasps, hornets, and yellow jackets.
- Blanketing foam that plugs yellow jacket holes and clings to wasp and hornet nests, preventing their escape.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
8-WH16	ENFORCER WASP & HORNET KILLER - 16 OZ. AEROSOL	12
8-FWH16	ENFORCER WASP & YELLOW JACKET FOAM - 16 OZ. AEROSOL	12

Kimberly-Clark Waterless Hand Wipes



- These wipes go wherever hands go to get dirty.
- Full sized 12" x 12" wipes for full sized cleaning.
- Natural cleaning agent is tough on grease, grime, ink, and paint.
- Dual Textured.
- 75 count bucket.

CAT. NO.	SIZE	CASE QTY
5-42272	BUCKET	6

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Terry Towels



- 100% cotton.
- Minimum of 14" x 17".
- Pre-Washed for absorbency.
- Fully-hemmed.
- All-white.
- Reusable.

CAT. NO.	DESCRIPTION	CASE QTY
DTT-10	TERRY TOWELS, PACK OF 10	10
DTT-24	TERRY TOWELS, PACK OF 24	8

WypAll ShopPro X80 Towels



- Engineered to feel like cloth and work even better.
- Absorbs more oil and water faster pound for pound than laundered shop towels
- Heavy duty

CAT. NO.	DESCRIPTION	CASE QTY
5-41041	WYPALL SHOPPRO X80 TOWELS, PACK OF 160	1

Shop Towels



- Heavy duty reusable towels.
- For wipe ups of grease, oil, water, etc.
- 100% cotton material is pre-shrunk and hemmed.
- Each towel measures 13" x 16".

CAT. NO.	DESCRIPTION	CASE QTY
ST-4	SHOP TOWELS, PACK OF 4	64
ST-10	SHOP TOWELS, PACK OF 10	25

Workhorse[®] Manufactured Rags



- The economical alternative to scrap rags.
- Made from Kimberly-Clark's advanced new material - Hydroknit[®].
- Durable, rag tough construction stands up to any task.
- Can be re-used time and time again.
- Available in white or blue.

CAT. NO.	DESCRIPTION	CASE QTY
5-41455	9-3/4" X 16-3/4" WHITE, PACK OF 100	10
5-41411	9-3/4" X 16-3/4" BLUE, PACK OF 100	10

Shoe Covers



- Slip these shoe covers on in seconds to protect carpet, tile, or wood from dirt and scuff marks. Customers will appreciate your professional appearance.

CAT. NO.	DESCRIPTION	CASE QTY
SC-1WP	WATERPROOF SHOE COVERS, PACK OF 50 PAIRS	10

Teri[®] Towels



- Multi-ply tissue reinforced with nylon webbing for added strength on the job.
- Made from 100% recycled paper.
- Size: 9-3/4" x 16-3/4".
- Color: White.
- Comes in a convenient pop up box.
- 126 towels/box.
- 10 boxes/case.

CAT. NO.	DESCRIPTION	CASE QTY
5-34790	TERI REINFORCED TOWELS, PACK OF 126	10

Triple-D™ Universal Coil Cleaner



- Universal coil cleaner that can be used on condensers, evaporators, micro-channels, roof-top units, and mini-split applications
- Triple active synergistic highly effective solution is formulated to remove a board range of soils while degreasing and deodorizing
- Ideal for cleaning most metals
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
TRIPLE-D	1 GALLON CONCENTRATE	4	4
TRIPLE-D-AER	19 OZ. AEROSOL	12	12

Pro-Blue™



- Heavy foaming alkaline-based solution designed for condensers, microchannels, and mini-splits
- Penetrates dirt and grease removing deposits resulting in clean and brightened coils
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-BLUE	1 GALLON CONTAINER	4	4
PRO-BLUE-AER	19OZ AEROSOL	6	6

Pro-Green™



- No rinse, mild alkaline coil cleaner
- Use on air-cooled condensers, evaporators, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications
- NSF approved for use in federally inspected plants

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-GREEN	1 GALLON CONTAINER	4	4
PRO-GREEN-AER	19OZ AEROSOL	6	6

Eco-Coil™ Environmentally Friendly Coil Cleaner



- Environmentally friendly no rinse non-corrosive cleaner ideal for evaporator and condenser coils, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications
- Tested to provide the highest level of performance, Eco-Coil not only reduces the number of products required to clean but also has different water mixture ratios to maximize solution usage
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
ECO-COIL	1 GALLON CONTAINER	4	4

Pro-Brown™



- Heavy duty alkaline cleaner that pulls out deeply embedded dirt removing greasy soils and oxidation while brightening and cleaning coils
- Ideal for air-cooled condensers, microchannels, and mini-splits thanks to its dual action foaming capabilities
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-BROWN	1 GALLON CONTAINER	4	4

Pro-Yellow™



- Powerful cleaner
- Ideal for condensers, microchannels, and mini-splits that targets large concentrations of dirt and grime
- Heavy foaming alkaline-based solution
- Debris will be removed from the coil while providing excellent brightening.
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-YELLOW	1 GALLON CONTAINER	4	4

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Pro-Kleen™

- Unique foaming acid coil cleaner
- Designed to replace hazardous hydrofluoric acid coil cleaners
- Contains a synergistic combination of mineral acids, corrosion inhibitors, biodegradable surfactants, penetrants, and degreasers that emulsify, solubilize and neutralize soils leaving a clean, bright, efficient coil surface
- Easy-rinse formula removes a broad range of soils
- Does not contain dangerous hydrofluoric or bipotassium phosphate



CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-KLEEN	1 GALLON CONTAINER	4	4

Pro-Red Plus™

- Fast acting cleaning solution
- For condensers, microchannels, and mini-splits
- Foams and lifts away stubborn deposits including tarnish and corrosion
- Non-acid formula is as effective as conventional acid cleaners without the use of hydrofluoric acid
- Vigorous foaming action eliminates the need for prolonged soaking, steam cleaning or scrubbing coils without emitting corrosive fumes or rusting ferrous metals
- Biodegradable and NSF approved



CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-RED+	1 GALLON CONTAINER	4	4

Pro-Flush® HVAC Flushing Solvent



- A flushing solvent for A/C and refrigeration systems
- Formulated for R410A retrofits, refrigerant conversions and compressor burnouts
- Compatible with all refrigerants and compressor oils
- All solvents in Pro-Flush® are non VOC and conform to EPA SNAP standards: low toxicity and residue free
- The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for one stop servicing
- The kit includes: 8 oz. container of Pro-Flush® solvent, refillable Pro-Flush® injector tool pressure tank, pressure relief valve for added safety
- Large rubber adapter that flushes up to 1-1/4" line sets
- Service hose included

CAT. NO.	DESCRIPTION	CASE QTY
PF-KIT	PRO-FLUSH® KIT - INJECTOR, 8 OZ. REFILL, NOZZLE ADAPTER AND HOSE	3
PF-16	PRO-FLUSH® HVAC FLUSHING SOLVENT - 16 OZ. REFILL	6

Foam-Plus™ Aerosol Foaming Coil Cleaner

- Heavy-duty foaming detergent coil cleaner in an aerosol can
- Non-flammable and water-based with no chlorinated solvents
- Blasting foam stream reaches into tight areas for maximum cleaning
- Foaming alkaline detergent quickly liquifies dirt, grease, oil or other residue and is completely self-rinsing on condensate producing coils



CAT. NO.	SIZE	CASE QTY	ORDER IN MULTIPLES
358-20	19 OZ.	12	12



PAN-PATCH™

- Pan-Patch™ is a two part epoxy coating with anti-microbial additives designed for HVAC applications. A self leveling formula that is ideal in a damp or wet environment
- Resists corrosion and stops pan leaks without replacing the pan.
- Light gray in color
- One gallon covers about 160 square feet with 10 mil thickness

CAT. NO.	SIZE	CASE QTY	ORDER IN MULTIPLES
PANPATCH	1 GALLON	4	4

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Pro-Bubble™ Leak Detector



- Easy-to-use
- High bubbling
- Viscoelastic blue leak detector

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
PRO-BUBBLE-32	32 OZ. BOTTLE WITH SPRAY TOP	12	12

Leak Armor™ UV Leak Detection & Sealant Kit



- Single use leak sealant and moisture scavenger with UV leak detecting dye in easy to use cartridge
- No tools or gauges required
- Works with all compressors, heat pumps & condensers
- Flex Shot Leak Armor UV

CAT. NO.	DESCRIPTION	CASE QTY
995S-MC	UV LEAK DETECTION & SEALANT KIT	1

Leak Armor™ Super Change™



- Links mineral/AB oil to any PDE/HFC refrigerant oil
- Eliminates oil change out
- Replaces R-22 line set conversion flush
- Boosts system efficiency
- Won't plug TXVs or cap tubes or pistons
- Compatible with units up to 6 Tons (can) and 12 Tons (bag)

CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
98I	SUPER CHANGE - UP TO 6 TONS	6	6
99I-MC	SUPER CHANGE RETO FIT KIT W/ HOSE	4	4

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

Leak Armor™ HVAC/R Leak Seal Kit

- Easy Shot™ can and hose with self-piercing valve for simple delivery
- Eliminates moisture and seals systems to stop and prevent leaks
- Installs quickly with no pump down or recovery
- Compatible with all oils and refrigerants
- Great for all systems including microchannel, heat pump and geothermal
- Compatible with units up to 12 Tons



CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
944KIT	LEAK ARMOR HVAC/R LEAK SEAL KIT	12	12

Leak Armor™ HVAC/R Leak Sealant with Dye Kit

- Easy Shot™ can and hose with self-piercing valve for simple delivery
- Includes UV dye for complete repair system
- Eliminates moisture and seals systems to stop and prevent leaks
- Installs quickly with no pump down or recovery
- Compatible with all oils and refrigerants
- Great for all systems including microchannel, heat pump and geothermal
- Compatible with units up to 12 Tons



CAT. NO.	DESCRIPTION	CASE QTY	ORDER IN MULTIPLES
972KIT	LEAK ARMOR HVAC/R LEAK SEALANT WITH DYE KIT	12	12

Leak Armor™ Leak Sealant & Moisture Eliminator

- Leak Sealant and Moisture Eliminator in one
- Save time and money with one simple application
- Available in Single Use, Single Pack and 4-Pack
- Compatible with units up to 12 Tons



CAT. NO.	DESCRIPTION	CASE QTY
985	SUPER SEAL FLEX INJECT™	6

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



NEW 800 Series



- Simple Private Label Badge System
- Blue Back Light
- Easy Wire Color Coded Terminal Blocks
- Battery or 24-Volt Power
- Separate Heating and Cooling Swing
- 5 Year Warranty

CAT. NO.	DESCRIPTION	CASE QTY
T855	UNIVERSAL RESIDENTIAL/LIGHT COMMERCIAL THERMOSTAT	10

NEW 700 Series



T701



T705



T721



T755

- Simple Private Label Badge System
- Blue Back Light
- Easy Wire Color Coded Terminal Blocks
- Battery or 24-Volt Power
- Separate Heating and Cooling Swing
- 5 Year Warranty

CAT. NO.	DESCRIPTION	CASE QTY
T701	SINGLE STAGE NON-PROGRAMMABLE THERMOSTAT	10
T705	SINGLE STAGE PROGRAMMABLE THERMOSTAT	10
T721	HEAT PUMP / CONVENTIONAL THERMOSTAT	10
T755	UNIVERSAL THERMOSTAT	10

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
 FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM



NEW Wifi Thermostats

EXCLUSIVELY FOR HVAC PROFESSIONALS
 T855iSH IS COMPATIBLE WITH EVERY PRO1 SUBBASE
 T72ii IS COMPATIBLE WITH ANY 2H/IC HEAT PUMP OR IH/IC CONVENTIONAL PRO1 SUBBASE
 T70ii IS COMPATIBLE WITH ANY IH/IC CONVENTIONAL PRO1 SUBBASE



T855iSH




T75ii, T72ii, T70ii

CAT. NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	CASE QTY
T855iSH	UP TO 2 HEAT, 2 COOL CONVENTIONAL UP TO 5 HEAT, 3 COOL HEAT PUMP	HARDWIRE ONLY	7 DAY OR NON-PROGRAMMABLE	10
T75ii	2 HEAT, 2 COOL HEAT PUMP 4 HEAT, 2 COOL CONVENTIONAL	HARDWIRE ONLY	PROGRAMMABLE THROUGH APP	10
T72ii	2 HEAT, 1 COOL HEAT PUMP 1 HEAT, 1 COOL CONVENTIONAL	HARDWIRE ONLY	PROGRAMMABLE THROUGH APP	10
T70ii	1 HEAT, 1 COOL ONLY	HARDWIRE ONLY	PROGRAMMABLE THROUGH APP	10

PRO1 Thermostat Guard

- Fits on every PRO1 thermostat
- Fits over an installed thermostat
- Includes 2 keys



CAT. NO.	WORKS WITH	DIMENSIONS			CASE QTY
		HEIGHT	WIDTH	DEPTH	
T150	ALL PRO1 THERMOSTATS	6.25"	3.25	8.25"	5

Plastic Thermostat Guards

- Used to prevent tampering with thermostats
- Covers are clear, allowing complete view of the thermostat and current settings
- Includes vent holes for easy airflow across the thermostat
- Lockable with universal key
- Includes mounting screws and key



CAT. NO.	DESCRIPTION	T-STAT CLEARANCE	CASE QTY
585-TG	CLEAR PLASTIC W/TWO BASES	8-1/4" X 4-1/2" X 3-1/4"	18
585-TG1	CLEAR PLASTIC W/TWO BASES	5-3/4" X 3-1/2" X 2-3/4"	18
585-TG6	CLEAR PLASTIC W/TWO BASES	6-1/4" X 3-3/4" X 1-3/4"	18
585-F336	KEY FOR THERMOSTAT GUARD	-	1

IMAGES AND SPECIFICATIONS MAY NOT BE REPRESENTATIVE OF ALL PRODUCTS LISTED.
 FOR THE FULL RANGE OF DIVERSITECH PRODUCTS PLEASE VISIT WWW.DIVERSITECH.COM

**WIRE
MANAGEMENT**



CONNECTORS



LIGHTING



FITTINGS



MORRIS PRODUCTS INC.
53 CAREY ROAD
QUEENSBURY, NY 12804
INFO@MORRISPRODUCTS.COM
1.888.777.6678



SINGLE SOURCE...
ELECTRICAL & LIGHTING

MORRISPRODUCTS.COM

MAY 2025

CAT# 00016