



YOU NEED IT

WE'VE GOT IT



EQUIPMENT MOUNTING

MORRISPRODUCTS.COM



YOU NEED IT
WE'VE GOT IT

MORRIS PRODUCTS

was founded in 1994, in Queensbury, NY. Originally created as a supplier of electrical products – wiring devices, lugs and connectors, cable ties and other accessories – Morris' mission was, and remains, to serve the needs of electrical distributors. With a staff of 2 office workers, and 2 warehouse workers, Morris Products soon outgrew its small location, and expanded to a much larger facility in the late 1990s. With that growth, Morris Products expanded with the addition of a full offering of wire management products, compression and mechanical connectors, conduit fittings, and LED Lighting. In 2016, Morris was acquired by DiversiTech Corporation, adding to a strong family of brands for the electrical and HVAC markets.

Today, Morris Products operates out of a state-of-the-art 65,000 square foot facility in Queensbury, NY, and offers electrical distributors more than 8,000 items in inventory, spanning 30 product categories. In addition to the main facility, MORRIS supplies electrical wholesalers from their west coast warehouse in Adelanto, CA, as well as numerous regional rep warehouses.

As a company, we maintain a laser focus on customer service with same day/next day shipping, allowing broken cartons, and no minimum orders. Experience the Morris Advantage, and let us earn your business.

CONNECTORS



GROUNDING



TAPE



WIRE MANAGEMENT



FITTINGS



ELECTRICAL BOXES



MOUNTING



HVAC



MOTORS & CONTROLS



CEMENTS / FLASHINGS



TOOLS



WIRING DEVICES



TABLE OF CONTENTS

STRUT FITTINGS	PG: 1-2
STRUT & CONDUIT CLAMPS	PG: 3-6
SPRING STEEL FITTINGS	PG: 7-12
BOX & FIXTURE SUPPORT	PG: 13-16
CABLE GRIPS & HANGERS	PG: 17-18
CABLE & CONDUIT SUPPORT	PG: 19-24
MOUNTING BRACKETS	PG: 25-26
GENERATOR PADS	PG: 27-30
EQUIPMENT PADS & ACCESSORIES	PG: 31-34

EQUIPMENT MOUNTING



Channel Nut - No Spring



- For all channel sizes
- 7404 can not be used with 13/16" & 1" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17400	1/4" - 20	0.25"	100
17402	3/8" - 16	0.37"	100
17404	1/2" - 13	0.50"	100

Channel Nut - Short Spring



- For 13/16" & 1" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17412	1/4" - 20	0.25"	100
17420	3/8" - 16	0.37"	100


Channel Nut Regular Spring



- For 1-3/8" & 1-5/8" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17430	1/4" - 20	0.25"	100
17438	3/8" - 16	0.37"	100
17442	1/2" - 13	0.50"	100


Post Base Single Channel 2 Hole Standard Strut 1-5/8"



- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel
- 2 Mounting Holes
- 4" X 6" Base

CAT. NO.	BOX QTY
17450	5


Post Base Single Channel 4 Hole Standard Strut 1-5/8"



- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel
- 4 Mounting Holes
- Corner Orientation
- 6" X 6" Base

CAT. NO.	BOX QTY
17452	5

Post Base Single Channel 4 Hole Square Strut 1-5/8"




- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel
- 4 Mounting Holes
- Side Orientation
- 6" X 6" Base

CAT. NO.	BOX QTY
17454	5

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

STEEL HAS ZINC ELECTROPLATE FINISH, 1-5/8" WIDE X 1/4" THICK. HOLES ARE 9/16" DIAMETER, 13/16" CENTER TO EDGE ON 1-7/16" CENTERS

Square Washer



CAT. NO.	BOLT SIZE	HOLE SIZE	BOX QTY
17612	1/4"	5/16"	100
17616	3/8"	7/16"	100
17618	1/2"	9/16"	100

2 Hole Splice Plate



CAT. NO.	BOX QTY
17622	50

3 Hole Splice Plate



CAT. NO.	BOX QTY
17624	25

4 Hole Splice Plate




CAT. NO.	BOX QTY
17626	25

4 Hole Tee Plate




CAT. NO.	BOX QTY
17636	20

3 Hole Corner Plate




CAT. NO.	BOX QTY
17632	25

2 Hole Cross Corner Angle

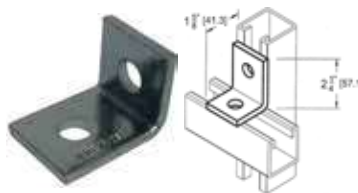


CAT. NO.	BOX QTY
17630	50

2 Hole Corner Angle

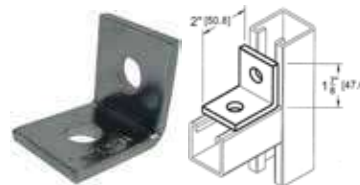


CAT. NO.	BOX QTY
17628	50

4 Hole 3 Way Corner Angle

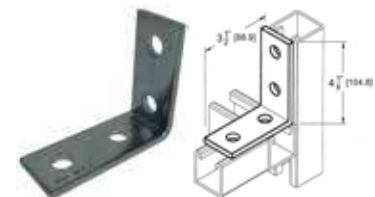


CAT. NO.	BOX QTY
17634	25

3 Hole Cross Corner Angle




CAT. NO.	BOX QTY
17633	50

2 Hole Open Corner Angle



CAT. NO.	BOX QTY
17638	50

Plastic White End Caps




CAT. NO.	CHANNEL USED WITH	BOX QTY
17682	13/16"	100
17684	1-5/8"	100

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Rigid Strut Clamp



- Secures Rigid/IMC Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17514	1/2"	0.840"	400	100
17515	3/4"	1.050"	600	100
17516	1"	1.315"	600	100
17517	1-1/4"	1.660"	600	50
17518	1-1/2"	1.900"	800	50
17519	2"	2.375"	800	50
17520	2-1/2"	2.875"	800	50
17521	3"	3.500"	800	25
17522	3-1/2"	4.000"	1000	25
17523	4"	4.500"	1000	25
17524	5"	5.562"	1000	25
17525	6"	6.625"	1000	25
17526	8"	8.625"	1000	25


Universal Strut Clamp



- Secures Rigid/IMC & EMT Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17532	1/2"	0.773"	400	100
17533	3/4"	0.986"	600	100
17534	1"	1.239"	600	100
17535	1-1/4"	1.585"	600	50
17536	1-1/2"	1.820"	800	50
17537	2"	2.286"	800	50

EMT Strut Clamp



- Secures EMT Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17542	1/2"	0.706"	400	100
17543	3/4"	0.922"	400	100
17544	1"	1.163"	600	100
17545	1-1/4"	1.510"	600	50
17546	1-1/2"	1.740"	800	50
17547	2"	2.197"	800	50

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Malleable Right Angle Pipe Clamp

- Right Angle 90° Conduit Support Secures Rigid, IMC or EMT Perpendicular to Steel Beam, Strut Channel or Angle Supports
- Electro Zinc Plated
- Malleable Iron Cradle
- Steel Galvanized Bolt/Hex Nuts


CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
21850	3/8"	0.820"	1.00"	1.12"	50
21851	1/2"	1.00"	1.25"	2.50"	50
21852	3/4"	1.125"	1.125"	2.81"	50
21853	1"	1.375"	1.375"	3.06"	50
21854	1-1/4"	1.75"	1.75"	3.19"	50
21855	1-1/2"	2.00"	2.375"	3.50"	50
21856	2"	2.50"	2.50"	4.50"	50
21857	2-1/2"	3.00"	3.00"	4.875"	25



Malleable Parallel Pipe Clamp

- Parallel Conduit Support Secures Rigid, IMC or EMT Parallel to Steel Beam, Strut Channel or Angle Supports
- Electro Zinc Plated
- Malleable Iron Cradle
- Steel Galvanized Bolt/Hex Nuts

CAT. NO.	TRADE SIZE	DIMENSIONS		OUTER BOX
		A	B	
21861	1/2"	2.00"	1.37"	50
21862	3/4"	2.88"	1.44"	50
21863	1"	3.06"	1.69"	50
21864	1-1/4"	3.63"	2.125"	25
21865	1-1/2"	3.88"	2.19"	25
21866	2"	4.63"	2.88"	25
21868	3"	5.88"	3.88"	10
21870	4"	6.81"	4.81"	10

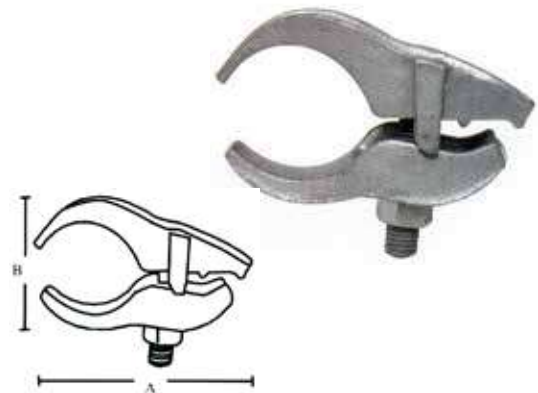

Malleable Edge Pipe Clamp

- Edge Conduit Clamp Secures Rigid, IMC or EMT Perpendicular to edge of Steel Beam, Strut Channel or Angle Supports
- Electro Zinc Plated
- Malleable Iron Cradle
- Steel Galvanized Bolt/Hex Nuts


CAT. NO.	TRADE SIZE	DIMENSIONS		OUTER BOX
		A	B	
21871	1/2"	2.81"	2.13"	50
21872	3/4"	2.94"	2.38"	50
21873	1"	3.06"	2.63"	25
21875	1-1/2"	3.94"	3.25"	25
21876	2"	4.50"	4.06"	25
21878	3"	5.75"	5.25"	10



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Strut to Beam Clamp with Square U-Bolt



- For 13/16" & 1-5/8" Channel
- Design load 1,200 lbs. when used in pairs
- Zinc Electroplate Finish

CAT. NO.	DESCRIPTION	BOX QTY
17462	BEAM CLAMP FOR 13/16" & 1-5/8" CHANNEL	25

Strut to Beam Clamp with Square U-Bolt



- For 2-7/16" & 3-1/4" Channel
- Design load 1,200 lbs. when used in pairs
- Zinc Electroplate Finish

CAT. NO.	DESCRIPTION	BOX QTY
17464	BEAM CLAMP FOR 2-7/16" & 3-1/4" CHANNEL	25

Strut Fitting Torque Values

- The following are the torque values used for determining the load ratings of fittings when attached to channel framing as specified in the Metal Framing Manufacturers Association (MFMA) Standard #2

THREAD SIZE	TORQUE		
	IN. LB.	FT. LB.	NM
1/4"	72	6	8.1
3/8"	228	19	25.8
1/2"	600	50	67.8

Beam Clamp Torque Values

- For beam clamps or other applications the following torque values from Manufacturer's Standardization Society (MSS) SP-69 are recommended unless otherwise specified


THREAD SIZE	TORQUE		
	IN. LB.	FT. LB.	NM
1/4"	40	3.3	4.5
3/8"	60	5.0	6.8
1/2"	125	10.4	14.1

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Beam Clamps Universal

- Used with Conduit Hangers, Bridle Rings and Threaded Rod
- Tapped for Rods - bottom and back
- Case Hardened Steel Set Screw tapped at an angle - locks on beam
- Zinc Plated Steel

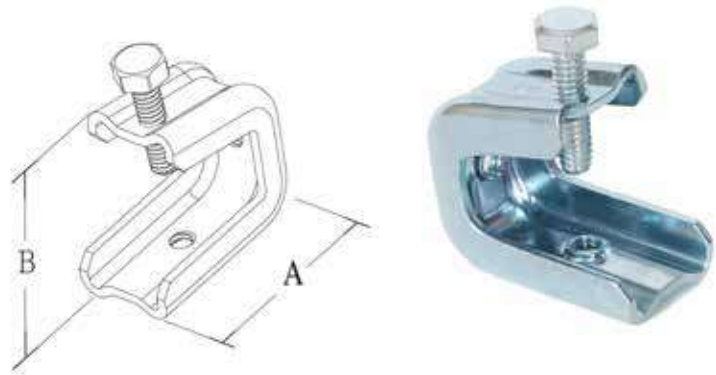


CAT. NO.	FITS FLANGE	BOTTOM & BACK THREADS	STATIC LOAD LIMIT BOTTOM HOLE ONLY	SCREW DIMENSIONS	DIMENSIONS		INNER BOX	MASTER BOX
					A	B		
17468	1/2"	1/4"-20	75 LBS	1/4"-20 X 1"	1.69"	1.66"	25	250
18111*	1/2"	10-24	75 LBS	1/4"-20 X 1"	1.65"	1.40"	-	50
17469	3/4"	3/8"-16	200 LBS	5/16"-18 X 1-3/8"	2.15"	2.01"	-	50

*Not UL Listed

Malleable Iron Universal Beam Clamp

- Maximum Flange Thickness of 5/8"
- The threaded hole on the back side of the clamp is not load rated
- Zinc Electroplate Finish

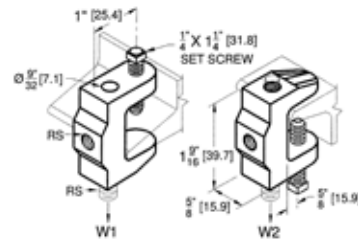


CAT. NO.	ROD SIZE (RS)	MAX LOAD (W1)	MAX LOAD (W2)	BOX QTY
17486	1/4"-20	100 LBS.	250 LBS.	100



Malleable Iron Rod Support Beam Clamp

- Used with Conduit Hangers, Bridle Rings & Drop Rods. 1/4" to 1/2"
- Tapped for Rods - bottom and back on all sizes
- Malleable Iron - Zinc plated


CAT. NO.	JAW OPENING	DIMENSIONS						BOX QTY
		ROD SIZE (RS)	SET SCREW SIZE (SS)	MAX LOAD (W)	B	L	H	
17472	3/4"	1/4"-20	5/16"-18	125 LBS.	1.18"	1.38"	1.38"	50
17474	7/8"	3/8"-16	3/8"-16	300 LBS.	2.00"	1.87"	1.75"	50
17476	1-1/8"	1/2"-13	1/2"-13	750 LBS.	2.50"	2.37"	2.14"	25

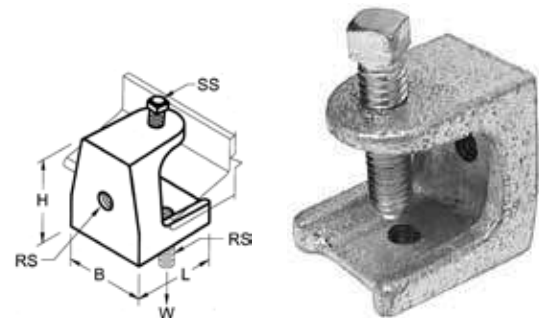

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Beam Clamps




- Fast installation; fits beam flange up to 1/2"
- Used with 1/4" and 3/8" threaded rod, "S" hooks, conduit hangers, electrical box, & #10-24 or 1/4"-20 bridle rings
- Tapping 1/4"-20 bottom and back.
- Also #10-24 tapping on back

Static Load Limit: 100 lbs

CAT. NO.	ACCOMMODATES		BOX QTY
	FLANGE	DROP ROD	
18016	UP TO 1/2" THICK	1/4" - 3/8"	100



Spring Steel Beam Clamps



- Can be used to suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 1/2"
- Bottom & Back Tapped 1/4"-20

Static Load Limit: 75 lbs to 100 lbs



Front Thread 75 lbs

Rear Thread 100 lbs

(static load limits cannot be combined)

CAT. NO.	FLANGE THICKNESS	BOX QTY
18012	1/8" - 1/4"	100
18014	5/16" - 1/2"	100

Spring Steel Beam Clamps - 1/4-20 X 3/8" Stud




- Can be used to suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 3/4"
- Beam clamp with 1/4"-20 x 3/8" staked stud used to suspend box from bottom of beam

Static Load Limit: 75 lbs

CAT. NO.	FLANGE THICKNESS	BOX QTY
18123	1/8" - 1/4"	100
18124	5/16" - 1/2"	100

Spring Steel Beam Clamps Universal



- Can be used on Bulb Tees & Beams
- Clearance for 1/4" Bolt in Tab

Static Load Limit: 200 lbs

CAT. NO.	FLANGE THICKNESS	BOX QTY
18018	1/8" TO 1/4"	100
18020	5/16" TO 1/2"	100
18152	9/16" TO 3/4"	100

Flange Mount Conduit Assembly - Bottom Mount

- Suspends conduit from bottom of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 25 lbs

CAT. NO.	FLANGE THICKNESS	FITS EMT	FITS RIGID/IMC	BOX QTY
18190	1/8" TO 1/4"	1/2"	-	100
18191	1/8" TO 1/4"	3/4"	1/2"	100
18192	1/8" TO 1/4"	1"	3/4"	100




Flange Mount Conduit Assembly - Side Mount

- Suspends conduit from side of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 15 lbs

CAT. NO.	FLANGE THICKNESS	FITS EMT	FITS RIGID/IMC	BOX QTY
18221	1/8" TO 1/4"	1/2"	-	100
18222	1/8" TO 1/4"	3/4"	1/2"	100
18223	1/8" TO 1/4"	1"	3/4"	100



Flange Mount Conduit Assembly - Bottom Mount - Posi-Lock

- Suspends conduit from bottom of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 75 lbs

CAT. NO.	FLANGE THICKNESS	FITS CONDUIT	BOX QTY
18200	1/8" TO 1/4"	3/8"	100
18050	1/8" TO 1/4"	1/2" & 3/4"	100
18202	1/8" TO 1/4"	1"	100
18211	5/16" TO 1/2"	1/2" & 3/4"	100
18212	5/16" TO 1/2"	1"	100



Flange Mount Conduit Assembly - Side Mount - Posi-Lock

- Suspends conduit from side of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 25 lbs

CAT. NO.	FLANGE THICKNESS	FITS CONDUIT	BOX QTY
18230	1/8" TO 1/4"	3/8"	100
18231	1/8" TO 1/4"	1/2" & 3/4"	100
18232	1/8" TO 1/4"	1"	100
18240	5/16" TO 1/2"	1/2" & 3/4"	100
18241	5/16" TO 1/2"	1"	100





Beam Clamp to Conduit Hanger Assembly



- Spring Steel Beam Clamp with Pre-Installed Conduit Hanger
- Positive Locking Conduit Hanger

Static Load limit:
100 lbs Vertical
25 lbs Horizontal

CAT. NO.	ORIENTATION	FITS CONDUIT	BOX QTY
18130	BOTTOM MOUNT	1/2" & 3/4"	100
18140	SIDE MOUNT	1/2" & 3/4"	100



Flange Mount Strap Hangers



- Suspends Strapping Thru 1" Width
- Fits Beam Flanges from 1/8" to 3/4"
- Parallel & Right Angle Configurations
- Installs with hammer only

Static Load limit: 200 lbs

CAT. NO.	FLANGE THICKNESS	TYPE	BOX QTY
18270	1/8" TO 1/4"	RIGHT ANGLE	100
18275	1/8" TO 1/4"	PARALLEL	100
18276	5/16" TO 1/2"	PARALLEL	100

Threaded Rod to Beam Assembly



- Suspends 1/4" and 3/8" threaded rod from overhead mountings
- Fits 1/8" Thru 1/2" Thick Flanges

Static Load limit: 200 lbs

CAT. NO.	FLANGE THICKNESS	FOR USE WITH	BOX QTY
18250	1/8" TO 1/4"	1/4" THREADED ROD	100
18251	5/16" TO 1/2"	1/4" THREADED ROD	100
18255	1/8" TO 1/4"	3/8" THREADED ROD	100


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Z Purlin Hangers

- Can be used to suspend fixtures etc.
- No Power Tools required
- Compensated for Angle of Purlin

Static Load Limit: 100 lbs

CAT. NO.	DESCRIPTION	BOX QTY
18155	1/4" BOTTOM HOLE	100
18156	1/4" HOLE FOR WIRE, S-HOOKS, PERFORATED STRAP AND JACK CHAIN	100



18155


18156

Z Purlin Flange Hangers

- Fits 1/16" to 1/4" thick Z Purlin or vertical flanges
- Clearance for 1/4" bolt
- Accommodates tooling for floor installations
- Can be used with S-hooks, perforated strap & wire

Static Load Limit:
18180 - 100lbs
18181 - 160lbs

CAT. NO.	FLANGE THICKNESS	FOR USE WITH	BOX QTY
18180	1/16" TO 1/4"	FOR USE WITH ANGLED Z PURLIN	100
18181	1/16" TO 1/4"	VERTICAL FLANGE	100



18180


18181

Z Purlin Conduit Hanger Assembly

- Installed without power tools
- Compensates for angle of purlin

Static Load Limit: 100 lbs

CAT. NO.	DESCRIPTION	BOX QTY
18171	1/2" TO 3/4" CONDUIT TO Z PURLIN	100
18172	1" CONDUIT TO Z PURLIN	100



Z Purlin Rod Hanger Assembly

- Installed without power tools
- Compensates for angle of purlin

Static Load Limit: 100 lbs


CAT. NO.	FOR USE WITH	BOX QTY
18160	1/4" THREADED ROD	100
18161	3/8" THREADED ROD	100



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Angle Bracket Rod/Wire Hangers

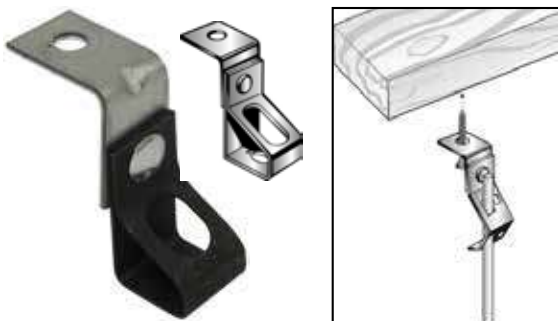


- Suspends #8 wire 1/4" and 3/8" threaded rod from overhead mountings with a clearance hole for 1/4" bolt
- Hangers made from high-carbon steel, zinc phosphate & oil finish. Angle bracket made from pre-galvanized steel

Static Load Limit: 160 lbs

CAT. NO.	FOR USE WITH	BOX QTY
18261	3/8" THREADED ROD THREAD IMPRESSION	100

Flexible Conduit/Cable Clips

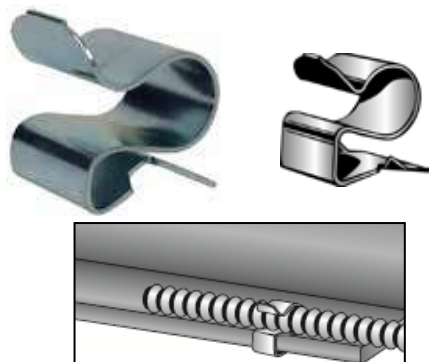

- Supports flexible conduit and all types of cable from flanges
- Made from high-carbon steel zinc plated

CAT. NO.	AC/MC CABLE O.D.	FLANGE SIZE	BOX QTY
18291	0.312" - 0.375"	1/16" - 3/16"	100
18292	0.375" - 0.437"	1/16" - 3/16"	100
18293	0.468" - 0.562"	1/16" - 3/16"	100
18294	0.562" - 0.718"	1/16" - 3/16"	100
18301	0.562" - 0.718"	3/16" - 9/32"	100

Flexible Conduit/Cable Fasteners



- Push Clip attaches BX, MC, or AC cable to open end of metal studs


CAT. NO.	DESCRIPTION	BOX QTY
18311	MC, AC OR BX TO METAL STUD	100



- Secures MC or BX to most metal studs
- Installed using a hammer only to 2" side of Stud

CAT. NO.	DESCRIPTION	BOX QTY
18312	MC OR BX (12-2 THRU 10-3) TO METAL STUDS	100

Spring Steel Conduit Clip

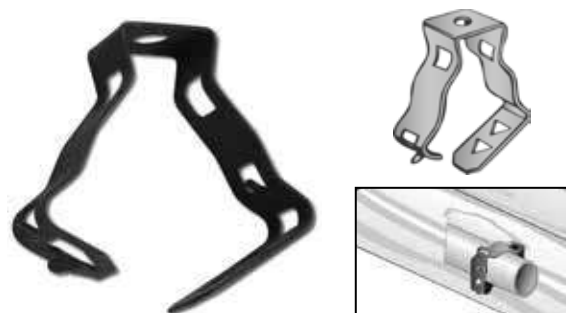

- Attach 1/2" or 3/4" Conduits
- Keyhole for Screw

**Static Load Limit: Vertical: 100lbs
Horizontal: 25lbs**

CAT. NO.	FITS CONDUIT	BOX QTY
18024	1/2", 3/4"	100


Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



- Cable Clip for 1/4-2 ZThru 12/3 MC, AC, or BX
- Supports cable from #12 to #8 wire in horizontal or vertical position
- OD's from 0.433" to 0.535"
- NOTE: These products are designed for positioning only
- No load rating

CABLE SIZE	CAT NO. FOR #12 WIRE	CAT NO. FOR #10 WIRE	CAT NO. FOR #8 & #9 WIRE	BOX QTY
1/4-2 CABLE	18026*	18026*	18026*	100
1/4-3 CABLE	18026*	18026*	18026*	100
1/2-2 CABLE	18026*	18026*	18026*	100
1/2-3 CABLE	18026*	18028	18028	100

*Not cULus Listed



18026

18028




- Supports conduit & flex cable from wire, rods or flanges
- Mounts On #12 To #8 Wire
- Mounts On 3/16" to 1/4" Rod
- Mounts On 1/8" To 3/8" Flange
- 18324 & 18325 not UL Listed

CONDUIT SIZE	CAT NO. FOR #10 & #12 WIRE	CAT NO. FOR #8 & #9 WIRE	3/16" TO 1/4" ROD	BOX QTY
1/2" EMT	18028	18028	18028	100
1/2" RIGID	18028	18030	18030	100
3/4" EMT	18030	18030	18030	100
3/4" RIGID	18030	18030	18324	100
1" EMT	-	18324	18324	100


CONDUIT SIZE	CAT NO. FOR 1/8"-1/4" FLANGE	CAT NO. FOR 3/16"-3/8" FLANGE	CAT NO. FOR 5/16"-3/8" FLANGE	BOX QTY
1/2" EMT	18028	18030	18030	100
1/2" RIGID	18030	18030	18324	100
3/4" EMT	18030	18324	18324	100
3/4" RIGID	18324	18325	18325	100
1" EMT	18324	18325*	18325*	100
1" RIGID	18325*	18325*	18325*	100
1-1/4" EMT	18325	-	-	100

*For horizontal applications only.



Static Load Limit

Vertical Flange




25 LBS

Vertical Wire or Rod



50 LBS

Horizontal Flange





100 LBS



- Attaches conduit or boxes to flanges, wire or rod
- Fits 1/8" to 3/8" flanges
- Attaches to #12 wire through 3/8" rod
- Attaches #10-24 or 1/4"-20 Threaded Bridle Rings (positioning only)

CAT NO.	DESCRIPTION	BOX QTY
18048	CLIP ATTACHES CONDUIT TO FLANGES, WIRE OR ROD	100



50 LBS



25 LBS



Spring Steel Cable Clips

Spring Steel Fast Support Conduit Clips

Spring Steel Multi-Function Clip




Box to Stud Fastener



- Screw attached support for box and conduit
- For use with either metal or wood studs
- Electrical box support clip secured with Self tapping screws for wood or metal studs

CAT. NO.	DESCRIPTION	BOX QTY
18345	BOX TO STUD FASTENER	100


Far Side Box Support



- Clips on electrical boxes for additional support
- 2-1/2" thru 4" Standoff
- Sized by Bending at Pre-marked Lines

CAT. NO.	DESCRIPTION	BOX QTY
18350	FAR SIDE BOX SUPPORT	100

Screwless Box Support



- Made from pre-galvanized steel
- Secures electrical box to finished drywall
- No stud necessary
- Fits 1/4"-20 Bolt

CAT. NO.	DESCRIPTION	BOX QTY
18375	BOX SUPPORT	100


Low Voltage Mounting Bracket



- Provides base for securing communications plates without use of electrical box
- Mounts standard plate
- Hardware included

CAT. NO.	DESCRIPTION	ORDER IN BAG QTY
18376	LOW VOLTAGE MOUNTING BRACKET	10


Box Stabilizer Support

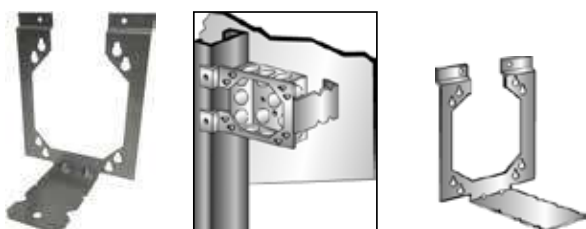

- Box Support for 2-1/2", 3-1/2" & 4" wood or metal studs
- Screw attached support for electrical boxes
- Made from pre-galvanized steel

CAT. NO.	STUD SIZE	BOX QTY
18370	2-1/2", 3-1/2"	100
18052	2-1/2", 3-1/2", 4"	100

Plastic Far Side Box Support

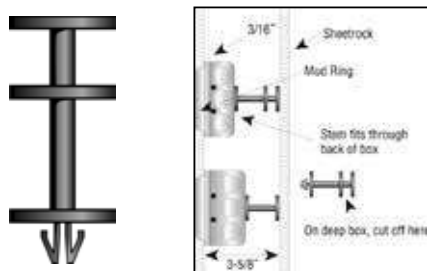

- No tools required
- Mounts quickly in the back of the box
- Designed for 3-5/8" steel studs
- May be used on standard 1-1/2" or 2-1/8" deep boxes


CAT. NO.	DESCRIPTION	BOX QTY
18378	PLASTIC FAR SIDE BOX SUPPORT	100

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Box Mounting Brackets

- Supports electrical boxes located between studs on 16" or 24" centers
- Boxes attach using self-tapping screws
- Made from pre-galvanized steel

CAT. NO.	DESCRIPTION	BOX QTY
18355	1-1/2" BOX TO STUDS ON 16" CENTERS	50
18356	2-1/8" BOX TO STUDS ON 16" CENTERS	50
18357	1-1/2" BOX TO STUDS ON 24" CENTERS	50
18358	2-1/8" BOX TO STUDS ON 24" CENTERS	50



Conduit/Box to Stud Fastener

- Secures conduit and electrical boxes to most structures
- Provides conduit support on both sides of electrical box
- Hole for screw or threaded rod mount with 1/4"-20 x 5/8" stud
- Made from pre-galvanized steel
- Spring steel fasteners riveted to bar
- Secures 1/2" & 3/4" Conduit


CAT. NO.	DESCRIPTION	BOX QTY
18360	MOUNT 4" SQUARE BOX WITH 1/2" OR 3/4" CONDUIT	25



Box To T-Bar Fastener


- Snap-on 24" span box hanger with dual height adjustment allows flush or 3/4" offset mount
- 1 BBC mounting clip with screw included
- Pre-galvanized steel with spring steel hardware included

CAT. NO.	DESCRIPTION	BOX QTY
18054	24" SPAN BOX TO T-BAR FASTENER	100



- Clip-On positive support for troffers and lay-in fixtures
- Complies with 2011 NEC 410.36 (B) means of support
- Fits around rectangular head T-Bars

CAT. NO.	DESCRIPTION	BOX QTY
18280	T-BAR CLIP FOR TROFFERS	100




Lighting Troffer Fastener

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Spring Steel Twist On T-Bar Hanger

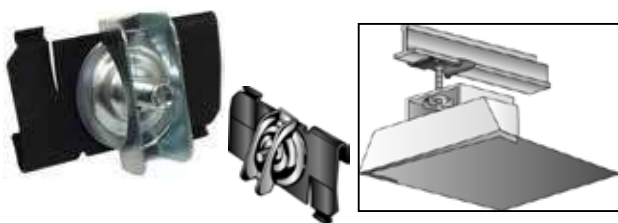

- Supports electrical fixtures to T-Bar 15/16" wide
- Assembled with 1" OD wing nut washer
- 1/4"-20 stud 5/8" long with wing nut washer

CAT. NO.	STUD SIZE	T-BAR	BOX QTY
18022	1/4" - 20 X 5/8"	15/16"	100


T-Bar Hanger Two Piece

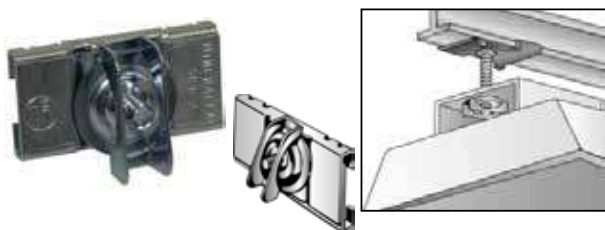

- Mounts fixtures or boxes to 1" T-Bar
- Static Load Limit of 75 lbs
- Stud is flat head, square shoulder carriage bolt which will not turn when positioned in slot
- Assembled with 1" OD wing nut washer

CAT. NO.	STUD SIZE	T-BAR	BOX QTY
18386	1/4"-20 X 5/8"	1"	100


T-Bar Scissor Clips Two Piece

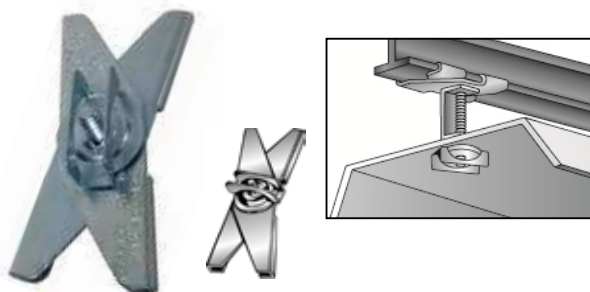

- Two-piece zinc plated clip used for mounting fixtures or boxes to 1" bar
- Static Load Limit of 100 lbs
- Includes wing nut washer

CAT. NO.	STUD SIZE	T-BAR	BOX QTY
18387	5/8"	1"	50
18388	2"	1"	50


T-Bar Drop Wire Clip

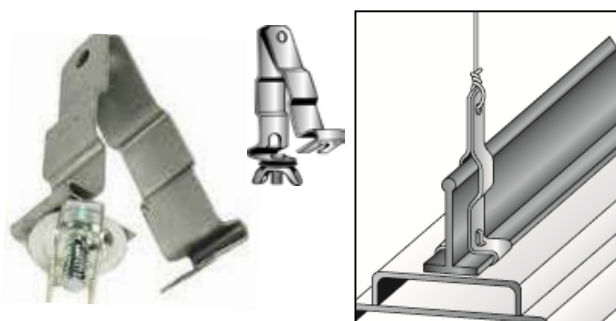

- Pre-galvanized clips support fixtures transferring the weight of fixture directly to the building structure
- Adds rigidity and support for truer alignment of the T-Grid & relieves the T-Grid from load stress
- Made from one-piece construction to accommodate various styles of T-Grid
- Includes wing nut washer

CAT. NO.	STUD SIZE	T-BAR	BOX QTY
18385	5/8"	1"	50

Wing Nut Washer

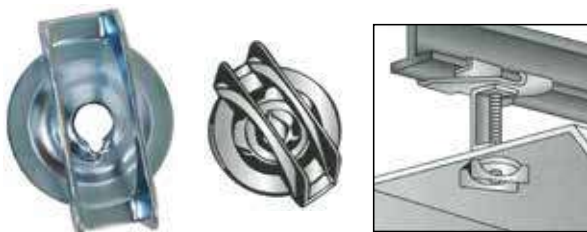


- Made from zinc plated steel
- Fits 1/4" - 20 Bolt

CAT. NO.	DESCRIPTION	BOX QTY
18389	WING NUT WASHER FOR 1/4"-20 BOLT	100

Malleable Crows Foot Fixture Hanger

- Crows Foot Fixture Hanger
- Malleable Iron

CAT. NO.	THREAD SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
18096	1/4" - 20	1.00"	1.10"	25	250



Fixture Hook

- High bay fixture hooks are used to hang light fixtures from multiple structural members
- Pre-installed set screw helps prevent vibratory loosening in high-abuse areas
- 3/4" NPT Threads
- Malleable Iron


CAT. NO.	THREAD SIZE	DIMENSIONS		BOX QTY
		WIDTH	DEPTH	
18092	3/4"	1.485"	1.595"	50



Swivel Pendant - Malleable Round Fixture Hanger

- Swivel pendant mount allows high bays and other hanging fixtures to be mounted on a sloped ceiling
- Pivot ball that allows the installed fixture and pipe stem to swing 20° from vertical when subjected to occasional bumps or vibration
- Fits 3/4" conduit
- Includes reducer bushing to 1/2" with set screw
- Fits standard 4" Octagon electrical boxes
- Rated for 50lbs Maximum


CAT. NO.	DIMENSIONS		BOX QTY
	A	B	
18094	4.21"	2.02"	25



Swivel Pendant - Malleable Square Fixture Hanger

- Used to support light fixtures, security cameras, exit signs, and a variety of electrical and electronic devices installed in industrial settings
- Pivot ball that allows the installed fixture and pipe stem to swing 20° from vertical when subjected to occasional bumps or vibration
- Fits 3/4" conduit
- Includes reducer bushing to 1/2" with set screw
- Fits standard 4" Square electrical boxes
- Rated for 50lbs Maximum

CAT. NO.	DIMENSIONS		BOX QTY
	A	B	
18093	4.21"	2.02"	25





Loop Cable Grips *Secondary Retention*




17200



17201



17202



CAT. NO.	DESCRIPTION	BAG QTY
17200	SMALL LOOP CABLE GRIP 1/16" - 5/64" 110 LB TENSILE	10
17201	MEDIUM LOOP CABLE GRIP 3/32" - 1/8" 250 LB TENSILE	10
17202	LARGE LOOP CABLE GRIP 3/16" 660 LB TENSILE	5

Wire Rope Hangers



17207



17208

- Wire Rope with Half Ball End Stop

CAT. NO.	DESCRIPTION	ORDER IN BAG QTY
17207	3/64" X 60" 36 LB TENSILE	2
17208	1/16" X 60" 66 LB TENSILE	2

Mini/Small Loop Cable Grips



17203



17204



17206

CAT. NO.	DESCRIPTION	ORDER IN BAG QTY
17203	MINI LOOP CABLE GRIP WITH LOOPED WIRE ROPE 3/64" - 1/16" X 10' 66 LB TENSILE	2 KITS
17204	MINI LOOP CABLE GRIP WITH STUD END WIRE ROPE 3/64" - 1/16" X 10' 66 LB TENSILE	2 KITS
17206	SMALL LOOP CABLE GRIP WITH LOOPED WIRE ROPE 5/64" - 1/16" X 10' 110 LB TENSILE	2 KITS



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Wire Rope Hangers



CAT. NO.	DESCRIPTION	TENSILE STRENGTH/LBS	MIN ORDER QTY	CASE QTY
17213	LOOPED END 1/8" X 60"	250	2	100
17215	WITH TOGGLE 1/16" X 60"	66	2	100
17216	WITH TOGGLE 5/64" X 60"	110	2	100
17218	WITH Y TOGGLE 1/16" X 60"	66	1	400
17221	WITH V TOGGLE 1/16" X 12"	66	1	400
17224	WITH V HOOK & BLOCKER 1/16" X 60"	66	1	600
17227	WITH STUD 1/16" X 12"	66	2	400
17228	WITH STUD 1/8" X 60"	250	2	400
17230	ROLL 1/8" X 500'	250	1	50



Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678

Wire Rope Hangers



Bridle Rings



- Commonly used with Beam Clamps
- Supports communications cable & other low voltage uses
- Zinc plated steel

CAT. NO.	RING SIZE	THREAD	BOX QTY
18420	1" DIAMETER	10 - 24	100
18421	1-1/2" DIAMETER	1/4" - 20	100
18422	2" DIAMETER	1/4" - 20	100



- Commonly used with Wood Beams
- Supports communications cable and other low voltage
- Zinc plated steel


CAT. NO.	RING SIZE	THREAD	BOX QTY
18425	1" DIAMETER	3/16"	100
18426	1-1/2" DIAMETER	1/4"	100
18427	2" DIAMETER	1/4"	100

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678

- Cost effective alternative to expensive cable tray
- Wide surface saddle provides support without stress for Category 5, fiber-optic, and other sensitive voice/datacomm cables
- 1/4" - 20 Mechanical Thread



CAT. NO.	DESCRIPTION	BOX QTY
18430	1-1/2" BRIDLE RING WITH SADDLE	50
18058	2" BRIDLE RING W/SADDLE	50
18060	4" BRIDLE RING W/SADDLE	50

J Hooks - 2"


- 2" J Hooks for DataComm Applications
- Cost effective alternative to expensive cable tray
- Wide base provides support without stress for Cat5, fiber-optic, other sensitive voice/datacomm cables and inner-duct
- Continuous wide-base radius supports natural curve of cable, eliminating kinks & bending
- Cable wire retainer is supplied with every part
- Unique design eliminates the need for attachment plate when stacking
- Can be attached to a wide variety of structures using beam clamps, clips and many other components



FIG. 1



FIG. 2




CAT. NO.	FIG.	DESCRIPTION	BOX QTY
18056	1	SCREW MOUNT	25
18405	2	CLIPS ON #12 WIRE THRU 3/8" ROD AND 1/8" TO 3/8" FLANGE	25

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com




Wire Rope Clip - Guy Wire



- For Guy Wire
- Malleable Iron
- Galvanized

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		A	B	
17302	1/4"	1.50"	0.25"	50

Conduit Support Universal



- Used to secure Service Entrance Conduit to the Outside surface of a building
- 1/2" x 10" Bolt
- Zinc Plated Steel

CAT. NO.	CONDUIT SIZE	DIMENSIONS		BOX QTY
		A	B	
21833	1-1/4" TO 3"	3.80"	10.00"	20

Malleable Mast Support Clamp




- Used to secure Service Entrance Conduit to the Outside surface of a building
- Hinged on one side and bolted on other side for easy installation
- Machined Lag Bolt
- Malleable Iron

CAT. NO.	CONDUIT SIZE	DIMENSIONS		BOX QTY
		A	B	
21830	2"	2.48"	0.41"	25
21831	2-1/2"	3.08"	0.44"	25

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Conduit Support Split Ring


- Used to secure Service Entrance Conduit to the Outside surface of a building
- Bolted on both sides
- Malleable Iron

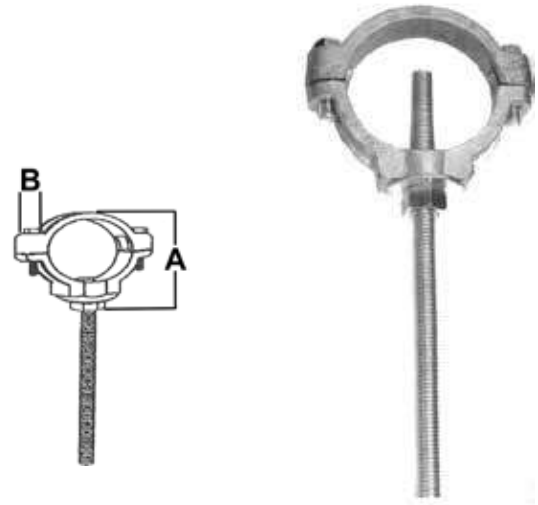

CAT. NO.	CONDUIT SIZE	BOLT SIZE	DIMENSIONS		BOX QTY
			A	B	
21835	2"	1/2" X 10"	2.70"	0.99"	25
21836	2-1/2"	1/2" X 10"	3.33"	1.07"	25
21837	3"	5/8" X 13"	4.50"	1.04"	10
21838	3-1/2"	5/8" X 13"	5.13"	1.08"	10
21839	4"	5/8" X 13"	5.60"	1.08"	10

Malleable U-Bolt Pipe Clamps

- Recommended for supporting or guiding heavy loads along runs of non-insulated pipe
- 2 hex nuts
- Malleable Iron - Galvanized

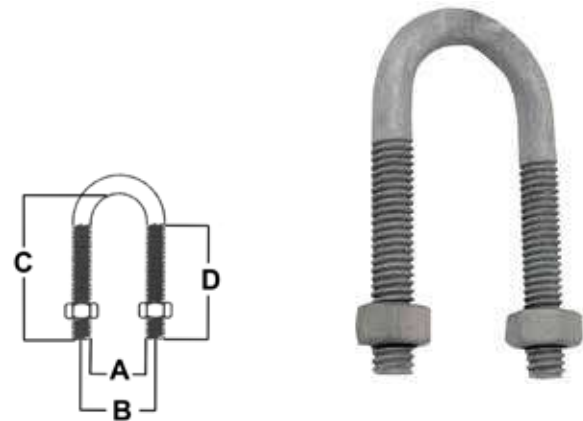

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
21840	1/2"	1.00"	1.25"	2.50"	1.81"	25	250
21841	3/4"	1.12"	1.38"	2.81"	1.81"	25	250
21842	1"	1.38"	1.63"	3.06"	1.81"	25	250
21843	1-1/4"	1.75"	2.00"	3.19"	1.81"	20	200
21844	1-1/2"	2.00"	2.38"	3.50"	1.81"	20	200
21845	2"	2.50"	2.50"	4.50"	2.63"	10	100
21846	2-1/2"	3.00"	3.25"	4.88"	2.63"	-	20
21847	3"	3.63"	3.88"	5.38"	2.63"	-	20
21848	3-1/2"	4.06"	4.56"	5.88"	2.63"	-	20
21849	4"	4.69"	5.06"	6.69"	2.63"	-	20

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



1 Hole EMT Pipe Straps - Steel



- Secures EMT Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- 3", 3-1/2" & 4" Fits EMT, Rigid or IMC conduit
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19400	1/2"	100	1000
19401	3/4"	100	1000
19402	1"	100	500
19403	1-1/4"	25	250
19404	1-1/2"	20	100
19405	2"	10	100
19431*	3"	-	10
19432*	3-1/2"	-	10
19433*	4"	-	10

*Suitable for EMT, Rigid or IMC conduit

2 Hole EMT Pipe Straps - Steel



- Secures EMT Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19412	1/2"	100	1,000
19413	3/4"	50	500
19414	1"	25	250
19415	1-1/4"	25	250
19416	1-1/2"	10	100
19417	2"	5	50

1 Hole Rigid Pipe Straps - Heavy Duty - Steel



- Secures Rigid & IMC Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- 3", 3-1/2", 4" Fits EMT, Rigid or IMC conduit
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19424	1/2"	100	1,000
19425	3/4"	50	500
19426	1"	25	250
19427	1-1/4"	25	250
19428	1-1/2"	20	200
19429	2"	10	100
19430	2-1/2"	5	50
19431*	3"	-	10
19432*	3-1/2"	-	10
19433*	4"	-	10
19434**	5"	-	10
19435**	6"	-	10

* Suitable for EMT, Rigid or IMC conduit

**Not UL listed

2 Hole Rigid Pipe Straps - Steel



- Secures Rigid & IMC Conduit
- Reinforced Rib for Extra Strength
- Snap-On Installation
- Zinc Plated Steel




CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
19436	1/2"	100	1,000
19437	3/4"	50	500
19438	1"	25	250
19439	1-1/4"	20	200
19440	1-1/2"	10	100
19441	2"	5	50
19442	2-1/2"	-	50
19443	3"	-	50
19444	4"	-	10
19445*	5"	-	10
19446*	6"	-	10

*Not UL listed

1 Hole Rigid Pipe Straps - Malleable Iron

- Secures Rigid & IMC Conduit
- Malleable Iron, Heavy Duty Casting
- Reinforced Rib for Extra Strength
- Snap-On Installation
- Zinc Plated


CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
19522	1/2"	2.25"	0.66"	0.94"	0.35"	100	1,000
19523	3/4"	2.26"	0.75"	1.22"	0.49"	50	500
19524	1"	3.06"	0.81"	1.50"	0.63"	25	250
19525	1-1/4"	3.69"	0.88"	1.88"	0.82"	20	200
19526	1-1/2"	4.00"	1.00"	2.06"	0.91"	10	100
19527	2"	5.06"	1.13"	2.56"	1.16"	-	25
19528	2-1/2"	6.10"	1.60"	3.30"	1.38"	-	25
19529	3"	7.28"	1.46"	3.70"	1.71"	-	25
19531	4"	8.86"	2.08"	4.85"	2.23"	-	10
19532	5"	9.38"	2.59"	6.00"	2.88"	-	2
19533	6"	10.38"	3.13"	7.00"	3.38"	-	2



Malleable EMT/Rigid Clamp Back Spacers

- Provides Space between conduit and mounting surface
- For use with malleable iron or aluminum straps
- Can be used with one hole straps
- Heavy Duty Casting

CAT. NO.	TRADE SIZE	DIMENSIONS							INNER BOX	OUTER BOX
		A	B	C	D	E	F	G		
14782	1/2"	2.06"	1.00"	0.50"	0.43"	0.32"	0.40"	0.08"	25	250
14783	3/4"	2.38"	1.06"	0.50"	0.53"	0.32"	0.40"	0.08"	25	250
14784	1"	2.94"	1.25"	0.56"	0.67"	0.32"	0.40"	0.08"	25	250
14785	1-1/4"	3.50"	1.38"	0.75"	0.84"	0.32"	0.40"	0.08"	10	100
14786	1-1/2"	3.81"	1.44"	0.81"	0.96"	0.32"	0.40"	0.08"	10	100
14787	2"	4.75"	1.94"	1.00"	1.20"	0.32"	0.40"	0.08"	5	50
14788	2-1/2"	5.75"	2.44"	0.75"	1.45"	0.32"	0.40"	0.08"	-	25
14789	3"	6.69"	2.63"	0.088"	1.77"	0.32"	0.40"	0.08"	-	10
14790	3-1/2"	7.13"	2.88"	1.08"	2.02"	0.32"	0.40"	0.08"	-	10
14791	4"	8.88"	3.06"	1.06"	2.27"	0.32"	0.40"	0.08"	-	10
14792	5"	10.13"	3.75"	0.06"	2.81"	0.32"	0.40"	0.08"	-	10
14793	6"	12.19"	4.00"	0.75"	3.35"	0.32"	0.40"	.08"	-	10



CAT. NO.	TRADE SIZE	CONDUIT TYPE & SIZE	OUTER BOX
19470	1/2"	EMT & RIGID	100
19471	3/4"	EMT & RIGID	100
19472	1"	EMT & RIGID	100
19473	1-1/4"	EMT	100
19474	1-1/4" 1-1/2"	1-1/2" EMT 1-1/4" RIGID	100
19475	1-1/2"	1-1/2" RIGID	100
19476	2"	EMT & RIGID	50
19477	2-1/2"	EMT & RIGID	25
19478	3"	EMT & RIGID	25
19479	3-1/2"	EMT & RIGID	25
19480	4"	EMT & RIGID	25

Conduit Hanger with Bolt



- Secures EMT or Rigid Conduit to any mounting surface, Threaded Rod or Insulated Supports
- Zinc Plated Steel



Quick-Sling[®] Mini-Split Stands

QUICK-SLING



Quick-Sling[®] Mini-Split Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed wackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.

CAT. NO.	SIZE	ORDER MULTIPLE
QSMSI20I	12"	1
QSMSI80I	18"	25
QSMS240I	24"	25

Quick-Sling[®] Mini-Split Dual Fan Stands

QUICK-SLING



Quick-Sling[®] Mini-Split Dual Fan Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed wackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMSI802	18" DUAL FAN MINI-SPLIT STAND, HOLDS UP TO 400 LBS.	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times



Quick-Sling[®] Wall Brackets - Flat Wall or Siding

QUICK-SLING

These hurricane rated wall brackets are strong, easy to install and are designed to be mounted into framing studs at 12" or 16" on center. These fit most mini-split models on the market today and provide the required distance between the wall and the condenser for optimal air flow. The QSWB2000 is rated for 350 lbs. and the heavy duty QSWB4000 is rated for 600 lbs. Both models are also available in 316 stainless steel.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSWB2000	WALL BRACKET W/RAIL, HOLDS UP TO 350 LBS.	1
QSWB4000	WALL BRACKET W/RAIL, HOLDS UP TO 600 LBS.	1

Quick-Swivel Flush Mount with H Bracket

QUICK-SLING

The Quick-Sling[®] QSWI3000 Quick Swivel is a flush ceiling mount with H style bracket for unit heaters. Swivel brackets provide fast and easy installation of most all ceiling mounted unit heaters, concealed ducted air handlers and branch controllers. The innovative swivel design allows for 360° rotation for setting the perfect air flow direction prior to hard piping the unit. Multiple ceiling mounting options adapt to various installation applications.



CAT. NO.	CASE QTY
QSWI3000	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times



GENPAD®

GenPad concrete generator pads are the answer for contractors who need a professional looking pad that will provide a lifetime base for their generator installations.

Each GenPad is made from high strength fibers and cement and is warranted for life. These pads provide a sturdy, permanent base for the generator that won't shift or degrade over time. Give your customers even more peace of mind with their generator purchase when you add the reliable GenPad.



FEATURES & BENEFITS:

- Manufactured with a unique process providing twice the strength and half the weight of standard concrete.
- Smooth, consistent appearance looks great under all generators
- High impact and breakage resistant
- Fiber reinforced concrete that is further reinforced with rebar
- Flat bottom to facilitate easy leveling of the pad and generator
- Virtually eliminates sinking of the unit into the ground
- Fast and easy to install
- Offered in 3" and 4" heights (4" pad is hurricane rated)
- Ships in Pallet quantities - 5 per pallet



Generac[®] Concrete GenPads[®]



**GENPADS[®] FOR GENERAC[®] GENERATORS ARE ABLE TO BE USED
WITH BOTH GUARDIAN[®] AND NEXT GEN[®] GENERATORS**

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FG543I-3GY	54" X 31" X 3"	5
FG543I-4GY	54" X 31" X 4"	5

Kohler[®] Concrete GenPads[®]



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FG3253-3K	53" X 32" X 3"	5
FG3253-4K	53" X 32" X 4"	5

Universal Concrete GenPads[®]



**UNIVERSAL GENPADS ARE ABLE TO BE USED WITH
BOTH GENERAC[®] AND KOHLER[®] GENERATORS**

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FG543I-3M	54" X 31" X 3"	5
FG543I-4M	54" X 31" X 4"	5

Generac[®] is a registered trademark of Generac Corporation
Kohler[®] is a registered trademark of Kohler Corporation..

NOTE: Catalog numbers in **RED** indicate products that are stocked at
DiversiTech[®] distribution centers and may incur longer lead times

COMPOSITE GENPAD®



The new Composite GENPAD is the lightweight pad option for fast and easy installations. Light enough to be handled by one person, the composite pad material is durable and strong, while simplifying and speeding installation.



STRONG & LIGHTWEIGHT

- 33 lbs total pad weight
- Easy to handle and install by just one person
- Increased load capacity vs regular GenPad

ADVANCED COMPOSITE MATERIAL

- Manufactured with thermoset sheet molding compound reinforced with fiberglass
- Specifically designed to distribute generator weight over entire pad surface
- Certified to UV resistant standard UL746C – resists fading
- Flammability rated UL94-5V and NFPA 37

PROFESSIONAL LOOK & FEEL

- Textured top surface and gray color for natural looking base
- Mounting bolt score marks for quick unit alignment and fast installation
- Includes hardware for mounting

LOWER COST SHIPPING

- Reduces stack height by 33%
- 5 pads are only 11" tall
- Nestable design saves space and adds stability during transport
- Pads lock in place during transit
- Ships in Pallet quantities – 5 per pallet



Generac® Composite GenPad®

Generator Pads



GENPADS® FOR GENERAC® GENERATORS ARE ABLE TO BE USED WITH BOTH GUARDIAN® AND NEXT GEN® GENERATORS

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CG3154-36Y	54" X 31" X 3"	5

Generac® is a registered trademark of Generac Corporation.

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

WWW.MORRISPRODUCTS.COM

1-888-777-6678




E Lite[®] Plastic Equipment Pads



E Lite's[®] rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, and extremely resilient. Each pad is molded with a size label and a symbol representing content of recycled material.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
ELI838-3	E LITE [®] PAD 18" X 38" X 3"	32


Rubber/Cork Anti-Vibration Pad

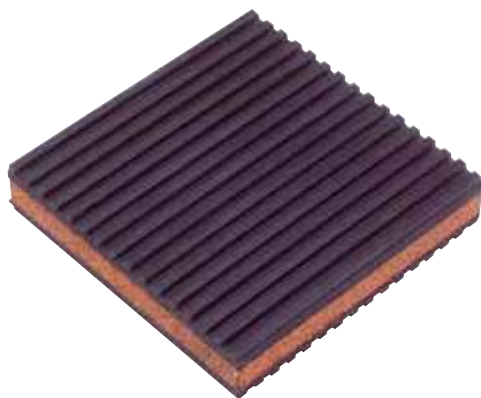

- Highest quality elastomeric oil resistant padding.
- Designed to withstand 50 psi.
- Rubber pads are corrugated on both sides.
- Cork is laminated between two corrugated pads.
- Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.

CAT. NO.	DESCRIPTION	CASE QTY
MP-2C	2" X 2" X 7/8" RUBBER/CORK	1
MP-3C	3" X 3" X 7/8" RUBBER/CORK	1
MP-4C	4" X 4" X 7/8" RUBBER/CORK	1
MP-6C	6" X 6" X 7/8" RUBBER/CORK	1

E.V.A. Anti-Vibration Pad

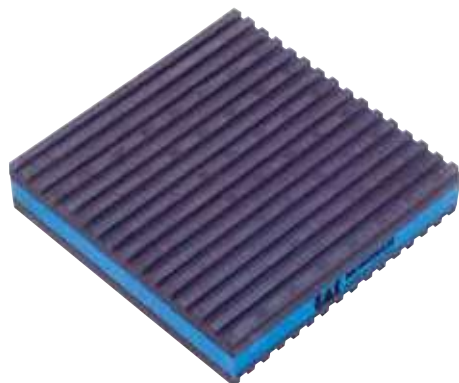

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1

- Special composite foam center which is much more structurally sound than cork.
- Not affected by oils or chemicals that can break down cork
- More effective at vibration dampening than solid rubber.
- Designed to withstand 50 PSI.

CAT. NO.	DESCRIPTION	CASE QTY
MP-2E	2" X 2" X 7/8" E.V.A. PAD	1
MP-3E	3" X 3" X 7/8" E.V.A. PAD	1
MP-4E	4" X 4" X 7/8" E.V.A. PAD	1
MP-6E	6" X 6" X 7/8" E.V.A. PAD	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or an alternative to supporting condensing units, air source heat pumps or a variety of outdoor equipment.

- Hef-T-Foot™ with strut comes in four lengths: 9.8", 15.7", 23.6", 39.4"
- Manufactured from heavy duty recycled rubber
- Complete with 0.8" x 1.6" galvanized steel strut adhered to the rubber with industrial adhesive.
- Strong and durable rubber with drain slots moulded into the underside to allow standing water to flow under the foot.



FF-250-S



FF-250-UNI

CAT. NO.	DESCRIPTION	CASE QTY
FF-250-S	HEF-T-FOOT™ - 9.8" WITH 1.6" X 0.8" STRUT	1
FF-600-S	HEF-T-FOOT™ - 23.6" WITH 1.6" X 0.8" STRUT	1
FF-250-UNI	HEF-T-FOOT™ - 9.8" UNIVERSAL	1

Furnace Mounting Block

- Mounting block can support 40% more weight than competitive products over 500 pounds
- Easy peel and stick installation.



CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
FB-1	FURNACE MOUNTING BLOCK	72	72

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Polypropylene Pull Line



- Continuous Fiber Polypropylene for Blowing Directly into Conduit
- 210 Lb Tensile Strength
- 6500 Ft Length
- Packaged in 5 gallon pail
- Waterproof - Will Not Rot or Mildew
- Can be Left in Conduit for Future Use

CAT. NO.	DIAMETER	LENGTH	TENSILE STRENGTH	QTY
31900	1/8"	6500'	210 LBS	1

Conduit Pulling Tape



- Saves money on small cable pulling applications
- Thread, measure and pull with single product
- Imprinted with sequential footage markings
- Fewer installation steps, significant material and labor savings
- Low Stretch Woven Polyester
- 3000 Ft

CAT. NO.	WIDTH	LENGTH	TENSILE STRENGTH (LBS.)	QTY
31906	1/2"	3000'	1250	1
31908	3/4"	3000'	2500	1

Twisted Polypropylene Pull Rope



- Low-Friction 3-Strand Twisted Polypropylene Rope
- Slides Easily through Conduit
- Non-Slip Surface can be handled without gloves
- Waterproof - Will not rot or mildew
- Rugged Lightweight Construction, Floats
- UV Resistant

CAT. NO.	DIAMETER	LENGTH	TENSILE STRENGTH (LBS.)	PULLING EYE	QTY
31910	1/4"	300'	1125	NO	1
31912	1/4"	600'	1125	NO	1
31914	1/4"	1200'	1125	NO	1
31916	3/8"	300'	2430	YES	1
31918	3/8"	600'	2430	YES	1
31920	3/8"	1200'	2430	YES	1
31922	1/2"	300'	3780	YES	1
31924	1/2"	600'	3780	YES	1
31926	1/2"	1200'	3780	YES	1

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Pulling Lubricant - Water Base Gel



Pulling Lubricant

- Exceptional Lubricity for Long & High-Temperature Cable Pulls
- Compatible with all Cable types - Electrical, Fiber Optic & Datacomm
- Non-Hazardous & Non-Flammable-Corrosive
- Apply by Hand, Brush or Pump
- Environmentally Safe - not derived from petroleum
- No gloves or eye protection needed
- Releases No Harmful Fumes or Gases
- Non-toxic, Non-staining, Hypoallergenic
- Reconstitutes with Water - Will Not Solidify in Conduit
- Cleans up Fast with water - Clear & Odorless
- Does not Stain Clothes
- Meets IEEE - 1210-1996 & ASTM D1693 Standards
- Coefficient of Friction: <23
- PH: 6-8
- Percent Solids: <3%
- Application Temperature: 30°F to 120°F (-4°C to 49°C)

CAT. NO.	SIZE	CASE QTY
99930	QUART	12
99932	GALLON	4
99934	5 GALLON	1

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

WWW.MORRISPRODUCTS.COM

1-888-777-6678



Super Yellow Anchor Kits



- Anchor Kits: Include 100 Screws, 100 Anchors, 1 Drill Bit and a 2-Compartment High Impact Re-usable Plastic Box with Hanger



YELLOW SUPER ANCHOR
LARGER & BETTER HOLDING
THAN CONICAL ANCHOR



DRILL BIT



PAN HEAD/COMBO SCREW



HEX HEAD/COMBO SCREW



CAT. NO.	SCREW SIZE	SCREW TYPE	ANCHOR	KITS/CASE
31020	10 X 1	PAN HEAD, SLOTTED/PHILLIPS	SUPER YELLOW	48
31024	10 X 1	HEX HEAD, SLOTTED	SUPER YELLOW	48
31030	10 X 1-1/4	PAN HEAD, SLOTTED/PHILLIPS	SUPER YELLOW	48
31034	10 X 1-1/4	HEX HEAD, SLOTTED	SUPER YELLOW	48

Strapping Hanger Iron



- Galvanized 3/4" vent strapping, hanger iron, plumber's tape, pipe hanger tape and many other uses.
- 1/4" centers for bolts or nails.

CAT. NO.	DESCRIPTION	CASE QTY
710-A1710	HANGER IRON (GALV.) - 10' ROLLS - 28 GAUGE	50
710-A1650	HANGER IRON (GALV.) - 50' ROLLS - 28 GAUGE	10
710-A16100	HANGER IRON (GALV.) - 100' ROLLS - 28 GAUGE	10


FireStop Caulk



- Odorless
- Water Based, Paintable
- Easy Gunability
- 1 year Shelf Life
- Red Color
- UL Classified
- Zero VOC's
- Unaffected by Freeze/Thaw
- Adhesion to almost Any Surface
- Non-Corrosive & Non-Combustible
- Non-Toxic - Environmentally Safe
- Non-Combustible Firestopping Caulk
- UL Classified for 1 & 2 Hour Fire Rated Walls & Floors
- Forms a Barrier to Prevent the Spread of Flames, Smoke & Toxic Fumes
- One Part Non-Intumescent Silicate based Firestop Sealant
- Tested & Approved for Use as Filler for Through Penetration Firestop Systems
- Meets Fire/Draft/Smoke criteria for BOCA - CABO - UPC - SBCC/IRC
- Suitable for Commercial, Industrial & Residential Firestop Requirements
- ASTM E-84 0 Flame & 0 Smoke Certified
- ASTM E-136 Residential Use Certified
- ASTM E-814 Commercial Use Compatible

CAT. NO.	DESCRIPTION	COVERAGE 1/2" X 1/4" BEAD	CASE QTY
67090	10.5 OZ. TUBE	16'	12
99982	29OZ. TUBE	45'	12
99984	1 GALLON PAIL	180'	1
99986	5 GALLON PAIL	896'	1

DiversiTech PRODUCTS



GFCI AND USB WIRING DEVICES



NEW GFCIs
IVORY, WHITE & LIGHT ALMOND

UL Listed
Compact Design



USB WALL OUTLETS

Type A and C
30 WATTS

ELECTRICAL BOXES

Get everything you need from
SmarToggle old-work plastic boxes
to weatherproof covers.



INSULATED CONNECTORS

Now Service Entrance Rated

CONNECTORS & GROUNDING



WIRE MANAGEMENT



CONNECTORS



WIRING DEVICES



FITTINGS



MORRIS PRODUCTS INC.
53 CAREY ROAD
QUEENSBURY, NY 12804
INFO@MORRISPRODUCTS.COM
1.888.777.6678

