



MORRIS



YOU NEED IT

WE'VE GOT IT

DIVERSITECH CATALOG

*Featuring Select DiversiTech,
& Morris Products for the
HVAC & Mini-Split Markets*

MORRISPRODUCTS.COM



MORRIS PRODUCTS

is a wholly owned subsidiary of DiversiTech Corporation, a leading manufacturer of supplies and components for the heating, ventilation, air conditioning and refrigeration (HVAC/R) industry.

As the HVAC/R and Electrical industries continue to converge, Morris Products brings the most popular DiversiTech offerings in supplies for the HVAC/R industry to the market. The wide range of products in this catalog represents those DiversiTech products stocked and ready for shipment from Morris' vast warehouses. Don't see what you need? Any DiversiTech item found on diversitech.com can be purchased through Morris Products.

Need help choosing the right product for your HVAC/R or Mini-Split application? Reach out to Techs Helping Techs for Technical Support from Drew and Chris for questions on DiversiTech products.*

YOU NEED IT
WE'VE GOT IT

TECHS HELPING TECHS

You have enough to worry about, so we are here to help. Our highly experienced technical support staff are standing by to assist you with any questions about our products.



1-800-995-2222



techsupport@diversitech.com



DREW PINO



CHRIS BAXTER

*For Technical Support on Morris Products. Contact techsupport@morrisproducts.com



PICTORAL INDEX

PAGE#

CATEGORY



5

**EQUIPMENT
MOUNTING**



25

**CONDENSATE
MANAGEMENT**



30

LINESETS



43

ELECTRICAL



83

TOOLS



98

**COMPONENTS &
CONSUMABLES**



114

**THERMOSTATS &
CONTROLS**

Morris Products brings all the installation components from DiversiTech to make your Mini-Split installation fast and easy. From pads and mounting solutions to whips and cleaners, we offer the products through Electrical Distributors that make ductless system installation and maintenance a breeze.



Suggested Ductless Tools:

CoilJet[®]
Pages 94-95



Lineset Cleaner Kit
Page 87




Tube Cutters
Page 87



Flaring Tools
Page 91



While all of the Diversitech products are available for order through Morris, most common items are in stock and ready to ship within 24 hours.

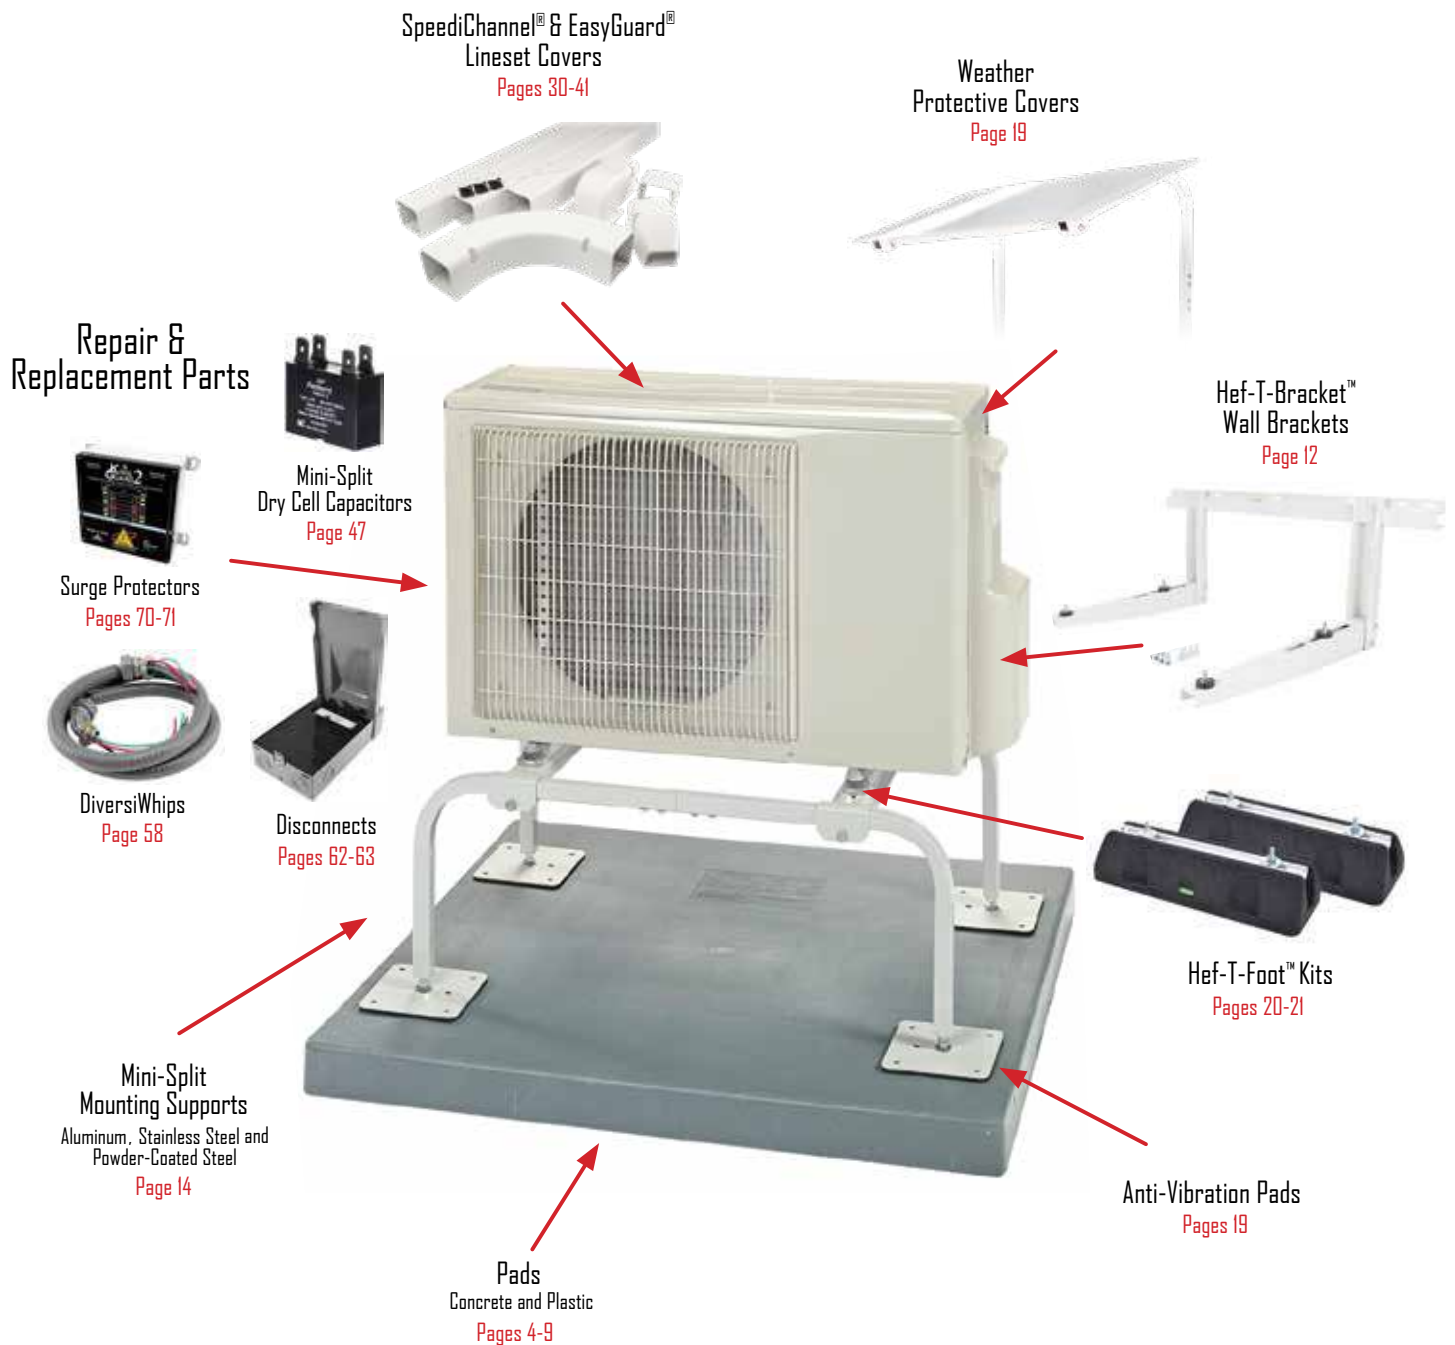

LOOK FOR A2L COMPATIBLE PRODUCTS THROUGHOUT THIS CATALOG.

FOR FULL PRODUCT OFFERING, SCAN OR CLICK TO VISIT DIVERSITECH.COM
ALL DIVERSITECH PRODUCTS CAN BE PURCHASED THROUGH MORRIS PRODUCTS





GENPAD®

GenPad concrete generator pads are the answer for contractors who need a professional looking pad that will provide a lifetime base for their generator installations.

Each GenPad is made from high strength fibers and cement and is warranted for life. These pads provide a sturdy, permanent base for the generator that won't shift or degrade over time. Give your customers even more peace of mind with their generator purchase when you add the reliable GenPad.



FEATURES & BENEFITS:

- **Manufactured with a unique process providing twice the strength and half the weight of standard concrete.**
- **Smooth, consistent appearance looks great under all generators**
- **High impact and breakage resistant**
- **Fiber reinforced concrete that is further reinforced with rebar**
- **Flat bottom to facilitate easy leveling of the pad and generator**
- **Virtually eliminates sinking of the unit into the ground**
- **Fast and easy to install**
- **Offered in 3" and 4" heights (4" pad is hurricane rated)**
- **Ships in Pallet quantities - 5 per pallet**

Generac[®] Concrete GenPads[®]



**GENPADS[®] FOR GENERAC[®] GENERATORS ARE ABLE TO BE USED
WITH BOTH GUARDIAN[®] AND NEXT GEN[®] GENERATORS**

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FG5431-3GY	54" X 31" X 3"	5
FG5431-4GY	54" X 31" X 4"	5

Kohler[®] Concrete GenPads[®]



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FG3253-3K	53" X 32" X 3"	5
FG3253-4K	53" X 32" X 4"	5

Universal Concrete GenPads[®]

**UNIVERSAL GENPADS ARE ABLE TO BE USED WITH
BOTH GENERAC[®] AND KOHLER[®] GENERATORS**

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FG5431-3M	54" X 31" X 3"	5
FG5431-4M	54" X 31" X 4"	5

Generac[®] is a registered trademark of Generac Corporation
Kohler[®] is a registered trademark of Kohler Corporation..

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

COMPOSITE GENPAD[®]



The new Composite GENPAD is the lightweight pad option for fast and easy installations. Light enough to be handled by one person, the composite pad material is durable and strong, while simplifying and speeding installation.



STRONG & LIGHTWEIGHT

- 33 lbs total pad weight
- Easy to handle and install by just one person
- Increased load capacity vs regular GenPad

ADVANCED COMPOSITE MATERIAL

- Manufactured with thermoset sheet molding compound reinforced with fiberglass
- Specifically designed to distribute generator weight over entire pad surface
- Certified to UV resistant standard UL746C – resists fading
- Flammability rated UL94-5V and NFPA 37

PROFESSIONAL LOOK & FEEL

- Textured top surface and gray color for natural looking base
- Mounting bolt score marks for quick unit alignment and fast installation
- Includes hardware for mounting

LOWER COST SHIPPING

- Reduces stack height by 33%
- 5 pads are only 11" tall
- Nestable design saves space and adds stability during transport
- Pads lock in place during transit
- Ships in Pallet quantities – 5 per pallet

Generac[®] Composite GenPad[®]



**GENPADS[®] FOR GENERAC[®] GENERATORS ARE ABLE TO BE USED WITH BOTH GUARDIAN[®]
AND NEXT GEN[®] GENERATORS**

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CG3154-36Y	54" X 31" X 3"	5

Generac[®] is a registered trademark of Generac Corporation.

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

UltraLite[®] Lightweight Concrete Equipment Pads



A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite[®] is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered expanded polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions. Earthquake (EQ) code compliant options available.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
UC1636-3	ULTRALITE [®] PAD 16" X 36" X 3"	30
UC1838-3	ULTRALITE [®] PAD 18" X 38" X 3"	30
UC1838-3CA	ULTRALITE [®] EQ PAD 18" X 38" X 3"	30
UC2436-3	ULTRALITE [®] PAD 24" X 36" X 3"	15
UC2436-3CA	ULTRALITE [®] EQ PAD 24" X 36" X 3"	15
UC2442-3	ULTRALITE [®] PAD 24" X 42" X 3"	15
UC2448-3	ULTRALITE [®] PAD 24" X 48" X 3"	15
UC2448-3CA	ULTRALITE [®] EQ PAD 24" X 48" X 3"	15

E Lite[®] Plastic Equipment Pads



E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, and extremely resilient. Each pad is molded with a size label and a symbol representing content of recycled material.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EL1838-3	E LITE [®] PAD 18" X 38" X 3"	32
EL2436-2	E LITE [®] PAD 24" X 36" X 2"	22
EL2436-3	E LITE [®] PAD 24" X 36" X 3"	16
EL2448-3	E LITE [®] PAD 24" X 48" X 3"	32

HUNKLITE[®] Equipment Pads



HunkLite[®] Pad is a support base for outdoor HVAC equipment. Made from 3000+ psi solid concrete with continuous steel reinforcement, this pad is extremely durable even in extreme outdoor conditions. HunkLite pads are specifically designed for local markets where solid concrete is required.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
L2436-2	HUNKLITE [®] PAD 24" X 36" X 2"	20
L2436-3	HUNKLITE [®] PAD 24" X 36" X 3"	15

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

EcoPad™ Black Plastic Equipment Pads

An injection molded equipment pad created from recycled materials to minimize environmental impact. It does not require any additional equipment for moving and handling. EcoPad™ is resistant to impact, ultra-violet degradation and weathering (virtually impervious to climatic variations), and will not crack, flake, or warp. Drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to easily secure to the pad.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EPI838-3	ECOPAD™ 18" X 38" X 3"	32
EP2436-2	ECOPAD™ 24" X 36" X 2"	24
EP2436-3	ECOPAD™ 24" X 36" X 3"	16
EP2448-3	ECOPAD™ 24" X 48" X 3"	32

CladLite® Pads

CladLite® Pads are lightweight concrete equipment pads that combine the strength and look of a perfectly poured concrete pad without the extreme weight. It is used as an outdoor support base for industrial applications such as condensers, heat pumps, etc. CladLite lightweight concrete equipment pads are specially engineered to be 80% lighter than solid concrete yet durable enough to withstand the harshest environment conditions.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1636-3	CLADLITE® PAD 16" X 36" X 3"	20
2436-2	CLADLITE® PAD 24" X 36" X 2"	24
2436-3	CLADLITE® PAD 24" X 36" X 3"	20
2442-2	CLADLITE® PAD 24" X 42" X 2"	24
2448-3	CLADLITE® PAD 24" X 48" X 3"	20

The Hurricane Pad™

The Hurricane Pad™ equipment pads are designed specifically for all Florida counties in hurricane wind zones up to 75 mph. Check with your local DiversiTech® distributor or our online Hurricane Pad Selector Tool to confirm the proper pad for your application.




CAT. NO.	DESCRIPTION	ORDER MULTIPLE
H1840-4	THE HURRICANE PAD™ 18" X 40" X 4"	16
H2436-4	THE HURRICANE PAD™ 24" X 36" X 4"	8
HMD1840-4	HURRICANE MIAMI-D PAD™ 18" X 40" X 4"	10
HT1840-4	HURRICANE T CLASS PAD™ 18" X 40" X 4"	10
HT2436-4	HURRICANE T CLASS PAD™ 24" X 36" X 4"	5
H2448-4	THE HURRICANE PAD™ 24" X 48" X 4"	8
HT2448-4	HURRICANE T CLASS PAD™ 24" X 48" X 4"	5
HMD2448-4	HURRICANE MIAMI-D PAD™ 24" X 48" X 4"	5

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Quick-Sling[®] Flexi Frame Equipment Stands

QUICK-SLING

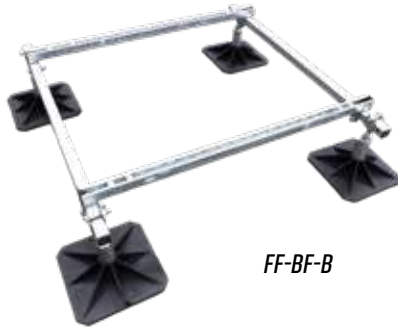

FF-BF-B



FF-BF-B SHOWN WITH
THE EXTENSION FRAME FF-EF-B

The galvanized steel Flexi Frame is a strong weather-resistant stand for mounting mini-splits and VRF equipment. The Flexi Frame can be configured with a base and multiple extensions to meet most application requirements.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FF-BF-B	FLEXI-BASE FRAME (47-1/4" RAILS)	
FF-EF-B	FLEXI-EXTENSION FRAME (47-1/4" RAILS)	
FF-BF-1500-B	FLEXI-BASE FRAME 1500 (59" RAILS)	
FF-EF-1500-B	FLEXI-EXTENSION FRAME 1500 (59" RAILS)	
FF-LI62I	FLEXI FRAME LEG, 16-21" TALL EXT. KIT (2/PK)	

Quick-Sling[®] Multi-Unit Mini-Split Super Stands[®]



QSMS300I-12

The Quick-Sling[®] QSMS300I family of multi-unit Super Stand for Mini-Splits provides a safe, stable platform for mounting multiple ductless condensers on one stand. The base stand accommodates up to six outdoor mini-split condensing units. Additional condensing units can be added to this base stand with the use of the QSMS300I-**EXT extender kit (2 additional units per extender kit).

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMS300I-12	MINI-SPLIT SUPER STAND - 12" TALL	
QSMS300I-12EXT	MINI-SPLIT SUPER STAND - 12" EXT. KIT	
QSMS300I-18	MINI-SPLIT SUPER STAND - 18" TALL	
QSMS300I-18EXT	MINI-SPLIT SUPER STAND - 18" EXT. KIT	
QSMS300I-24	MINI-SPLIT SUPER STAND - 24" TALL	
QSMS300I-24EXT	MINI-SPLIT SUPER STAND - 24" EXT. KIT	

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times



Florida Hurricane
Approved

Quick-Sling[®] VRF/VRV Super Stand[®]

QUICK-SLING

BASE AND EXTENSION ARCHITECTURE



The VRF/VRV Super Stand Equipment Stands are now simpler to order, easier to size and compatible with more equipment model families.

TYPE	RAIL LENGTH	HEIGHT			ORDER MULTIPLE
		12"	18"	24"	
BASE MODULES	48"	QSSB48-12	QSSB48-18	QSSB48-24	
	62"	QSSB62-12	QSSB62-18	QSSB62-24	
	74"	QSSB74-12	QSSB74-18	QSSB74-24	
EXTENSION KITS	48"	QSSX48-12	QSSX48-18	QSSX48-24	
	62"	QSSX62-12	QSSX62-18	QSSX62-24	
	74"	QSSX74-12	QSSX74-18	QSSX74-24	



SUPER STAND[®]
VRF/VRV Equipment
Super Stands



BASE MODULE



EXTENSION KIT

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

Hef-T-Bracket™



230-B2XL

Used for supporting condensing units, Hef-T-Brackets feature a cross bar that is attached to a wall, and two L-shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L-shaped brackets, and fastened using the bolts and anti-vibration washers provided.

Adjustable top hinge. Provides proper offset when installed on a siding wall.
Available on 230-B2M and 230-B2L Only



230-B2L

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-B2M	HEF-T-BRACKET™, MEDIUM, 18", WITH HINGE	
230-B2L	HEF-T-BRACKET™, LARGE, 21", WITH HINGE	
230-B3M	HEF-T-BRACKET™, MEDIUM, 18"	
230-B3L	HEF-T-BRACKET™, LARGE, 21"	
230-B2XL	HEF-T-BRACKET™, EXTRA LARGE, 26"	

Quick-Sling® Wall Bracket - Foundation Mount



This unique, 300 lb. condenser mounting bracket is designed to install directly to a foundation and still provides 7" clearance between the wall and the unit. The shelf depth is 19" and allows plenty of room for piping and service.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSWB3000	WALL BRACKET W/RAILS, HEAVY DUTY	

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Quick-Sling® Wall Brackets - Flat Wall or Siding

QUICK-SLING

These hurricane rated wall brackets are strong, easy to install and are designed to be mounted into framing studs at 12" or 16" on center. These fit most mini-split models on the market today and provide the required distance between the wall and the condenser for optimal air flow. The QSWB2000 is rated for 350 lbs. and the heavy duty QSWB4000 is rated for 600 lbs. Both models are also available in 316 stainless steel.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSWB2000	WALL BRACKET W/RAIL, HOLDS UP TO 350 LBS.	
QSWB2000SS	STAINLESS STEEL WALL BRACKET W/RAIL, HOLDS UP TO 350 LBS.	
QSWB2000-3	WALL BRACKET W/RAIL, 3 MOUNTING ARMS, HOLDS UP TO 350 LBS.	
QSWB4000	WALL BRACKET W/RAIL, HOLDS UP TO 500 LBS.	
QSWB4000SS	STAINLESS STEEL WALL BRACKET W/RAIL, HOLDS UP TO 500 LBS.	

Quick-Sling® Mini-Split Wall Brackets



QSWB1000



QSWB2005

The Quick-Sling® Wall Bracket provides a quick, safe, and stable way to mount your unit on the wall. They allow for easy access during installation, service, and maintenance.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSWB1000	FLAT WALL - WALL BRACKET, HOLDS UP TO 500 LBS.	
QSWB1100	FLAT WALL - WALL BRACKET, WITH SLIDER TRACKS, HOLDS UP TO 500 LBS.	
QSWB2004	LARGE WALL BRACKET, HOLDS UP TO 350 LBS.	
QSWB2004SS	LARGE WALL BRACKET, STAINLESS STEEL, HOLDS UP TO 350 LBS.	
QSWB2005	LARGE WALL BRACKET, 3 MOUNTING ARMS, HOLDS UP TO 500 LBS.	

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Quick-Sling[®] Mini-Split Stands


QUICK-SLING



QSMSI206



QSMSI201



QSMSI201-PAL

Our full line-up of mini-split stands consist of many different sizes, configurations and materials to fit all types of installations, from BASIC offerings to more feature-rich PRO options. They provide a safe, stable platform for mounting ductless condensers and are quicker to install than many alternatives.

	BASIC GREAT VALUE	STANDARD HURRICANE / SEISMIC CODE COMPLIANT	PRO ULTIMATE WEATHER RESISTANCE
MATERIAL	POWDER-COATED GALVANIZED STEEL	POWDER-COATED STEEL	POWDER-COATED ALUMINUM
STRENGTH	HEAVY-DUTY STEEL CONSTRUCTION	HEAVY-DUTY STEEL CONSTRUCTION	LIGHTER THAN STEEL WITH SAME HOLDING CAPACITY
CORROSION PROTECTION	EXCELLENT CORROSION PROTECTION	EXCELLENT CORROSION PROTECTION	SUPERIOR CORROSION PROTECTION IDEAL FOR COSTAL/HARSH ENVIRONMENTS
APPLICATION OPTIONS	SINGLE FAN	SINGLE FAN UNIT DUAL FAN UNIT LARGE CABINET UNITS HORIZONTAL AIR DISCHARGE UNITS COMBO UNIT MULTI-UNIT	SINGLE FAN UNIT DUAL FAN UNIT LARGE CABINET UNITS


With the most robust offering of mini-split stands in the industry, we make it easy to choose the right one for the job, whether it's for a single residential mini-split install or a complex multi-unit commercial project.

MATERIAL	SINGLE FAN UNIT STANDS	DUAL FAN UNIT STANDS	DOUBLE STACK	LARGE CABINET STANDS	HORIZONTAL AIR DISCHARGE UNITS	COMBO UNIT STAND	MULTI-UNIT STAND
SINGLE FAN GALVANIZED STEEL	QSMSI206 QSMSI806						
STAINLESS STEEL	QSMSI201-SS QSMSI801-SS QSMS2401-SS	QSMSI202-SS					
POWDER-COATED ALUMINUM	QSMSI201-PAL QSMSI801-PAL QSMS2401-PAL	QSMSI202-PAL QSMSI802-PAL QSMS2402-PAL					
POWDER-COATED STEEL	QSMSI200 QSMSI201 QSMSI800 QSMSI801 QSMS2400 QSMS2401	QSMSI202 QSMSI802 QSMS2402	QSMSI203 QSMSI203-N	QSMSI204 QSMSI804 QSMS2404	QSMSI205 QSMSI805 QSMS2405	QSMS4000-12 QSMS4000-18 QSMS4000-24	QSMS3001-12 QSMS3001-18 QSMS3001-24 QSMS3001-12EXT QSMS3001-18EXT QSMS3001-24EXT

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Quick-Sling® Mini-Split Stands

QUICK-SLING

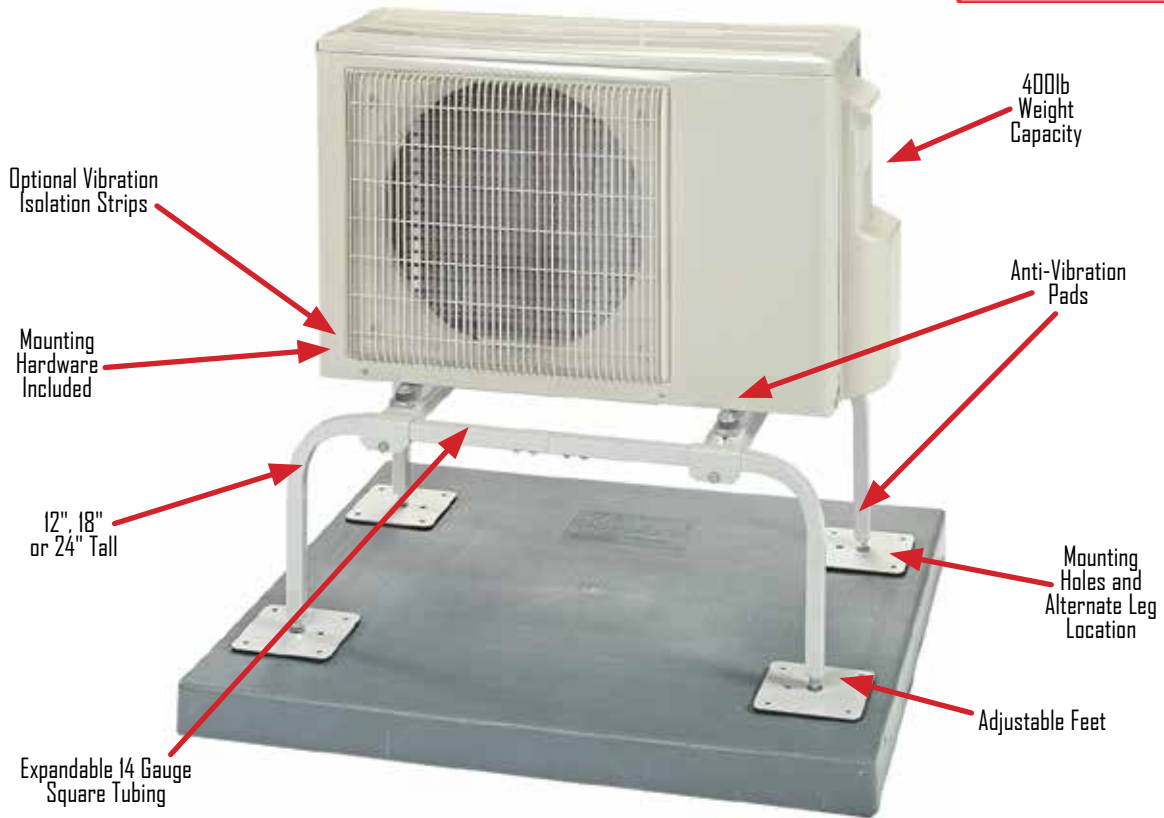

Quick-Sling® Mini-Split Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed wackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.

Now available in Stainless Steel (-SS).

- Easier to install and maintain
- Flood and snow zones
- Keeps debris from coil



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMSI200	12" HIGH MINI-SPLIT STAND "THIN", HOLDS UP TO 400 LBS.	1
QSMSI20I	12" HIGH MINI-SPLIT STAND "WIDE", HOLDS UP TO 400 LBS.	1
QSMSI20I-SS	12" HIGH MINI-SPLIT STAND "WIDE", HOLDS UP TO 400 LBS.	1
QSMSI800	18" HIGH MINI-SPLIT STAND "THIN", HOLDS UP TO 400 LBS.	1
QSMSI80I	18" HIGH MINI-SPLIT STAND "WIDE", HOLDS UP TO 400 LBS.	1
QSMSI80I-SS	18" HIGH MINI-SPLIT STAND "WIDE", HOLDS UP TO 400 LBS.	1
QSMS240I	24" HIGH MINI-SPLIT STAND "WIDE", HOLDS UP TO 400 LBS.	1
QSMS240I-SS	24" HIGH MINI-SPLIT STAND "WIDE", HOLDS UP TO 400 LBS.	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Quick-Sling[®] Mini-Split Stands - Extra Wide

QUICK-SLING



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMSI204	12" HIGH LARGE MINI-SPLIT STAND "EXTRA WIDE", HOLDS UP TO 400 LBS	
QSMSI205	12" HIGH LARGE MINI-SPLIT STAND "EXTRA WIDE", 3 RAILS HOLDS UP TO 400 LBS.	
QSMSI804	18" HIGH LARGE MINI-SPLIT STAND "EXTRA WIDE", HOLDS UP TO 400 LBS.	
QSMSI805	18" HIGH LARGE MINI-SPLIT STAND "EXTRA WIDE", 3 RAILS HOLDS UP TO 400 LBS.	
QSMS2404	24" HIGH LARGE MINI-SPLIT STAND "EXTRA WIDE", HOLDS UP TO 400 LBS.	
QSMS2405	24" HIGH LARGE MINI-SPLIT STAND "EXTRA WIDE", 3 RAILS HOLDS UP TO 400 LBS.	

Quick-Sling[®] Mini-Split Dual Fan Stands

QUICK-SLING



Quick-Sling[®] Mini-Split Dual Fan Stands provide a safe, stable platform to mount your unit on. It keeps unit elevated above lawn mowers, weed wackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMSI202	12" DUAL FAN MINI-SPLIT STAND, HOLDS UP TO 400 LBS.	
QSMSI802	18" DUAL FAN MINI-SPLIT STAND, HOLDS UP TO 400 LBS.	
QSMS2402	24" DUAL FAN MINI-SPLIT STAND, HOLDS UP TO 400 LBS.	

Quick-Sling[®] Mini-Split Double Stack Stand

QUICK-SLING



Quick-Sling[®] Mini-Split Double Stack Stands provide a safe, stable platform to mount your unit on. It keeps the unit elevated above lawn mowers, weed wackers, pets, snow, and flooding. The elevated height allows for ease of installation, maintenance and service.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMSI203	12" MINI-SPLIT DOUBLE STACK STAND, HOLDS UP TO 400 LB BOTTOM / 200 LB TOP	
QSMSI203-N	12" HIGH MINI-SPLIT DOUBLE STACK, NARROW HOLDS UP TO 400 LB BOTTOM / 200 LB TOP	

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times


The combo unit stand accommodates two single or double outdoor mini-splits. Ideal for rooftop installations. Made from heavy duty 1-1/2" square tubing and large 12" x 12" square feet.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMS4000-12	COMBO MINI-SPLIT STAND - 12"	1
QSMS4000-18	COMBO MINI-SPLIT STAND - 18"	1
QSMS4000-24	COMBO MINI-SPLIT STAND - 24"	1

Aluminum Equipment Stands

The Aluminum Equipment Stands accommodate one or more outdoor mini-split condensing units. Mounting rails are adjustable and the stands use captive fasteners for quick and secure equipment mounting. Extensions can be added to a base to mount multiple units on a single stand.

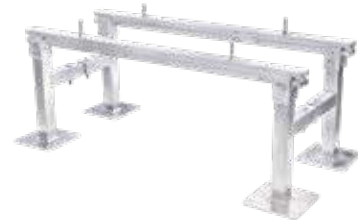

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
STANDS		
QSTDI403-AL	14" MINI-SPLIT OUTDOOR EQUIPMENT	1
QSTDI404-AL	14" FOR TRADITIONAL SPLIT SYSTEMS OR 2 FAN MINI-SPLIT	1
QSTD2403-AL	24" MINI-SPLIT OUTDOOR EQUIPMENT	1
QSTD2404-AL	24" FOR TRADITIONAL SPLIT SYSTEMS OR 2 FAN MINI-SPLIT	1
EXTENSIONS		
QSTD1403-ALX	EXTENSION FOR QSTDI403-AL	1
QSTD1404-ALX	EXTENSION FOR QSTDI404-AL	1
QSTD2403-ALX	EXTENSION FOR QSTD2403-AL	1
QSTD2404-ALX	EXTENSION FOR QSTD2404-AL	1

QUICK-SLING Feet for Mini-Split QSMS Stands - 12" x 12"

The Quick-Sling® QSMSFT12 is a 4 pack of 12" x 12" feet for QSMS stands. These would typically be used on rooftop applications where larger feet are needed to replace the QSMS existing 6" x 6" feet.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSMSFT12	12" X 12" FEET FOR MINI-SPLIT STANDS - QTY 4	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Equipment Ceiling Mounting Brackets



The Quick-Sling® QSWI3000 Quick Swivel is a flush ceiling mount with H style bracket for unit heaters. Swivel brackets provide fast and easy installation of most all ceiling mounted unit heaters, concealed ducted air handlers and branch controllers. The innovative swivel design allows for 360° rotation for setting the perfect air flow direction prior to hard piping the unit. Multiple ceiling mounting options adapt to various installation applications.

CAT. NO.	MAX CAPACITY	STEEL GA	CASE QTY
QSWI3000	200 LB	14	1

Mini-Split Stands - Pitched Roof Stand



The Quick-Sling® QSPRI000 is a pitched roof stand/bracket that provides a strong & stable platform to mount an outdoor mini-split unit to a sloped roof. The pitched roof bracket adjusts from 9° to 45° to match the pitch of the roof. This stand is 34.6" wide and the support arms are adjustable from 3" to 29" width. It has a load capacity of 300 lbs.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSPRI000	MINI-SPLIT STAND FOR PITCHED ROOFS	1

Mini-Split Stands - Roof Bracket



The Quick-Sling® Roof Bracket QSRB1000 mounts to a QSWB3000 or the QSMS1200,1201,1202,1800,1801,1802, 2400, 2401, 240I. The Roof Bracket protects the equipment from snow and freezing rain and is designed to ensure proper airflow around the equipment. It is constructed of 14 ga. powder coated steel and the roof shield is made from durable, UV protected twin wall plastic.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSRB1000	ROOF BRACKET FOR MINI-SPLIT STANDS	1

Quick-Sling WeatherShield® Roof Cover



The Quick-Sling WeatherShield® QSWSI000 shields and protects outdoor ductless condensing units from weather damage. The QSWSI000 fits all popular mini split models, it is adjustable to fit units 31.5" to 41.5" length and 6" to 14" wide. Quick-Sling WeatherShield® mounts directly to the mini-split and fits most sizes of equipment. Roof material is UV protected, mounting hardware is included.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSWSI000	ROOF COVER FOR MINI-SPLIT UNITS (31.5"-41.5" X 6-14")	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times



QSAC5101

Vibration Isolation Strips

QUICK-SLING

These specially engineered strips are made of high-density elastomeric-coated, molded and pre-compressed fiberglass.

CAT. NO.	DESCRIPTION	FOR USE WITH	ORDER MULTIPLE
QSAC5100	VIBRATION ISOLATION KIT NARROW MS	QSMS1200 QSMS1800 QSMS2400	
QSAC5101	VIBRATION ISOLATION KIT WIDE MS	QSMS1201 QSMS1801 QSMS2401	
QSAC5102	VIBRATION ISOLATION KIT DOUBLE FAN STAND	QSMS1202 QSMS1802 QSMS2402	
QSAC5104	VIBRATION ISOLATION KIT	QSMS1204 QSMS1804 QSMS2404	
QSAC5105	VIBRATION ISOLATION KIT FOR LARGE *05 STANDS	QSMS1205 QSMS1805 QSMS2405	
QSAC5200	VIBRATION ISOLATION KIT FOR 48" SS	QSSB48-** QSSX48-**	
QSAC5201	VIBRATION ISOLATION KIT FOR 62" SS	QSSB62-** QSSX62-**	
QSAC5202	VIBRATION ISOLATION KIT FOR 74" SS	QSSB74-** QSSX74-**	

Anti-Vibration Feet




Set of 4 each 6" x 6" anti-vibration feet for QSMS and QSTD stands. These anti-vibration feet provide 3 times more deflection than standard AV pads and can be used on any application where additional vibration isolation or noise reduction is needed.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QSAC3000	ANTI-VIBRATION FEET	

E.V.A. Anti-Vibration Pad

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1




- Special composite foam center which is much more structurally sound than cork.
- Not affected by oils or chemicals that can break down cork
- More effective at vibration dampening than solid rubber.
- Designed to withstand 50 PSI.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
MP-2E	2" X 2" X 7/8" E.V.A. PAD	
MP-3E	3" X 3" X 7/8" E.V.A. PAD	
MP-4E	4" X 4" X 7/8" E.V.A. PAD	
MP-6E	6" X 6" X 7/8" E.V.A. PAD	

Rubber/Cork Anti-Vibration Pad

- Highest quality elastomeric oil resistant padding.
- Designed to withstand 50 psi.
- Rubber pads are corrugated on both sides.
- Cork is laminated between two corrugated pads.
- Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.



CAT. NO.	DESCRIPTION	CASE QTY
MP-2C	2" X 2" X 7/8" RUBBER/CORK	
MP-3C	3" X 3" X 7/8" RUBBER/CORK	
MP-4C	4" X 4" X 7/8" RUBBER/CORK	
MP-6C	6" X 6" X 7/8" RUBBER/CORK	

Base Pads



The DiversiTech® 230-BPI7W base pad is a white mounting base used when a condenser must be bolted to the base. The base is used mainly on rooftop and ground applications to raise unit 3" above surface. Used primarily on ductless condensers, the sliding rail design allows for quick and easy attachment to equipment mounting feet.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-BPI7W	17" BASE PAD, WHITE, PACK OF 2	10

Hef-T-Block™



Used as mounting bases when condensing units must be bolted down. Available in three lengths. Furnished complete with end caps and mounting bolts. Maximum load capacity is 440 pounds per mounting block. Installation temperature range from -4°F (-20°C) to 140°F (60°C). Hef-T-Blocks fit all mini-split condensing units with a unique sliding rail feature.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-MBI4W	14" HEF-T-BLOCK™, WHITE W/END CAPS, PACK OF 2	1
230-MBI7W	17" HEF-T-BLOCK™, WHITE W/END CAPS, PACK OF 2	1
230-MB36W	36" HEF-T-BLOCK™, WHITE W/END CAPS, PACK OF 2	1
230-MBCW	HEF-T-BLOCK™ REPLACEMENT END CAP, WHITE, PACK OF 25	1

Hef-T-Foot™ Mini-Split Installation Kit



Hef-T-Foot™ blocks designed to mount to mini-split outdoor units. High quality heavy-duty compression molded rubber provides solid base and absorbs vibration and sound. Includes mounting hardware.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FF-450-S-KIT	PAIR OF HEF-T-FOOT™ 17.7" MINI-SPLIT MOUNTING BLOCKS INCLUDING STRUT INSERTS AND HARDWARE.	1
FF-600-S-KIT	PAIR OF HEF-T-FOOT™ 23.6" MINI-SPLIT MOUNTING BLOCKS INCLUDING STRUT INSERTS AND HARDWARE.	1
FF-1000-S-KIT	PAIR OF HEF-T-FOOT™ 39.4" MINI-SPLIT MOUNTING BLOCKS INCLUDING STRUT INSERTS AND HARDWARE.	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Hef-T-Foot™

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or an alternative to supporting condensing units, air source heat pumps or a variety of outdoor equipment.

- Manufactured from heavy duty recycled rubber
- Complete with .8" x 1.6" galvanized steel strut adhered to the rubber with industrial adhesive.
- Strong and durable rubber with drain slots moulded into the underside to allow standing water to flow under the foot.



FF-250-UNI



FF-250-S

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FF-250-S	9.8" WITH 1.6" X 0.8" STRUT	1
FF-450-S	17.7" WITH 1.6" X 0.8" STRUT	1
FF-600-S	23.6" WITH 1.6" X 0.8" STRUT	1
FF-250-UNI	9.8" UNIVERSAL	1

Furnace Mounting Block

- Mounting block can support 40% more weight than competitive products - over 500 pounds
- Easy peel and stick installation.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
FB-1	FURNACE MOUNTING BLOCK	72

One Piece Heat Pump Risers

- Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers
- The one piece, heavy duty plastic unit is manufactured in three heights
- Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise
- Mounting block can support 40% more weight than competitive products over 500 pounds
- Easy peel and stick installation



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
HPR-3	RISER - 3"	48
HPR-6	RISER - 6"	36
HPR-12	RISER - 12"	16

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

EMT Strut Clamp



- Secures EMT Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17542	1/2"	0.706"	400	100
17543	3/4"	0.922"	400	100
17544	1"	1.163"	600	100
17545	1-1/4"	1.510"	600	50
17546	1-1/2"	1.740"	800	50
17547	2"	2.197"	800	50

Rigid Strut Clamp



- Secures Rigid/IMC Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17514	1/2"	0.840"	400	100
17515	3/4"	1.050"	600	100
17516	1"	1.315"	600	100
17517	1-1/4"	1.660"	600	50
17518	1-1/2"	1.900"	800	50
17519	2"	2.375"	800	50

Universal Strut Clamp



- Secures Rigid/IMC & EMT Conduit To Strut
- Zinc Electroplate Finish

CAT. NO.	PIPE SIZE	O.D.	DESIGN LOAD (LBS)	BOX QTY
17532	1/2"	0.773"	400	100
17533	3/4"	0.986"	600	100
17534	1"	1.239"	600	100
17535	1-1/4"	1.585"	600	50
17536	1-1/2"	1.820"	800	50
17537	2"	2.286"	800	50
17520	2-1/2"	2.875"	800	50
17521	3"	3.500"	800	25
17522	3-1/2"	4.000"	1000	25
17523	4"	4.500"	1000	25
17524	5"	5.562"	1000	25
17525	6"	6.625"	1000	25
17526	8"	8.625"	1000	25

Post Base Single Channel for 1-5/8" Strut



- Secures Strut Assembly to Floor or other Surface
- Galvanized Steel

CAT. NO.	BASE	MOUNTING HOLES	BOX QTY
17450	4" X 6"	2	5
17452	6" X 6"	4	5
17454	6" X 6"	4	5

Channel Nut Regular Spring



- For 1-3/8" & 1-5/8" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17430	1/4" - 20	0.25"	100
17438	3/8" - 16	0.37"	100
17442	1/2" - 13	0.50"	100

Channel Nut - Short Spring



- For 13/16" & 1" channel
- Zinc Electroplate Finish

CAT. NO.	THREAD	THICKNESS	BOX QTY
17412	1/4" - 20	0.25"	100
17420	3/8" - 16	0.37"	100

Strut to Beam Clamp with Square U-Bolt



- Design load 1,200 lbs. when used in pairs
- Zinc Electroplate Finish

CAT. NO.	DESCRIPTION	BOX QTY
17462	FOR 13/16" & 1-5/8" CHANNEL	25
17464	FOR 2-7/16" & 3-1/4" CHANNEL	25

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

3 Hole Corner Plate

CAT. NO.	BOX QTY
17632	25



2 Hole Cross Corner Angle

CAT. NO.	BOX QTY
17630	50



2 Hole Open Corner Angle

CAT. NO.	BOX QTY
17638	50



Spring Steel Cable Clips



- Cable Clip for 14/2 Z thru 12/2 MC, AC, or BX
- Supports cable from #12 to #8 wire in horizontal or vertical position
- OD's from 0.433" to 0.535"
- NOTE: These products are designed for positioning only
- No load rating



CABLE SIZE	BOX QTY
18026	100

Beam Clamps

- Fast installation; fits beam flange up to 1/2"
- Used with 1/4" and 3/8" threaded rod, "S" hooks, conduit hangers, electrical box, & #10-24 or 1/4"-20 bridle rings
- Tapping 1/4"-20 bottom and back
- Also #10-24 tapping on back



Static Load Limit: 100 lbs

CAT. NO.	ACCOMMODATES		BOX QTY
	FLANGE	DROP ROD	
18016	UP TO 1/2" THICK	1/4" - 3/8"	100

Square Washer



CAT. NO.	BOLT SIZE	HOLE SIZE	BOX QTY
17612	1/4"	5/16"	100
17616	3/8"	7/16"	100
17618	1/2"	9/16"	100

2 Hole Corner Angle

CAT. NO.	BOX QTY
17628	50



3 Hole Cross Corner Angle

CAT. NO.	BOX QTY
17633	50




4 Hole 3 Way Corner Angle

CAT. NO.	BOX QTY
17634	25



Plastic White End Caps

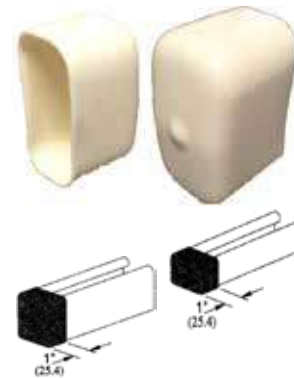

CAT. NO.	CHANNEL USED WITH	BOX QTY
17682	13/16"	100
17684	1-5/8"	100

Images and Specifications may not be representative of all products listed.
 For more information on The Morris Products Line visit: www.morrisproducts.com

Flange Mount Conduit Assembly Bottom Mount - Posi-Lock



- Suspends conduit from bottom of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 75 lbs

CAT. NO.	FLANGE THICKNESS	FITS CONDUIT	BOX QTY
18200	1/8" TO 1/4"	3/8"	100
18050	1/8" TO 1/4"	1/2" & 3/4"	100
18202	1/8" TO 1/4"	1"	100

Flange Mount Conduit Assembly Side Mount - Posi-Lock



- Suspends conduit from side of beam
- Will pivot 360°
- Installs with hammer only

Static Load Limit: 25 lbs

CAT. NO.	FLANGE THICKNESS	FITS CONDUIT	BOX QTY
18230	1/8" TO 1/4"	3/8"	100
18231	1/8" TO 1/4"	1/2" & 3/4"	100
18232	1/8" TO 1/4"	1"	100
18240	5/16" TO 1/2"	1/2" & 3/4"	100
18241	5/16" TO 1/2"	1"	100

Beam Clamp to Conduit Hanger Assembly



18140

- Spring Steel Beam Clamp with Pre-Installed Conduit Hanger
- Positive Locking Conduit Hanger

**Static Load limit:
100 lbs Vertical
25 lbs Horizontal**

CAT. NO.	ORIENTATION	FITS CONDUIT	BOX QTY
18130	BOTTOM MOUNT	1/2" & 3/4"	100
18140	SIDE MOUNT	1/2" & 3/4"	100

Spring Steel Beam Clamps 1/4"-20 X 3/8" Stud



- Can be used to suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 3/4"
- Beam clamp with 1/4"-20 x 3/8" staked stud used to suspend box from bottom of beam

Static Load Limit: 75 lbs

CAT. NO.	FLANGE THICKNESS	BOX QTY
18123	1/8" - 1/4"	100
18124	5/16" - 1/2"	100

Spring Steel Beam Clamps Universal



- Can be used on Bulb Tees & Beams
- Clearance for 1/4" Bolt in Tab

Static Load Limit: 200 lbs

CAT. NO.	FLANGE THICKNESS	BOX QTY
18018	1/8" TO 1/4"	100
18020	5/16" TO 1/2"	100
18152	9/16" TO 3/4"	100

Z Purlin Rod Hanger Assembly



- Installed without power tools
- Compensates for angle of purlin

Static Load Limit: 100 lbs

CAT. NO.	FOR USE WITH	BOX QTY
18160	1/4" THREADED ROD	100
18161	3/8" THREADED ROD	100

Z Purlin Flange Hangers



18180

- Fits 1/16" to 1/4" thick Z Purlin or vertical flanges
- Clearance for 1/4" bolt
- Accommodates tooling for floor installations
- Can be used with S-hooks, perforate strap & wire

**Static Load Limit:
18180 - 100lbs
18181 - 160lbs**

CAT. NO.	FLANGE THICKNESS	FOR USE WITH	BOX QTY
18180	1/16" TO 1/4"	FOR USE WITH ANGLED Z PURLIN	100
18181	1/16" TO 1/4"	VERTICAL FLANGE	100

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



CP-22 Pumps



- 1/2 Gallon Tank Capacity
- Continuous Duty Limit: 140F
- Not Suitable for Over 160F at Inlet
- 1.6 Gallons a Minute
- 22' Lift Height

CAT. NO.	DESCRIPTION	BOX QTY
ULTRACP-22	CONDENSATE PUMP - 120V	6
ULTRACP-22T	CONDENSATE PUMP - 120V W/20' 3/8" TUBE	6
ULTRACP-22-230	CONDENSATE PUMP - 230V	6
ULTRACP-22T-230	CONDENSATE PUMP - 230V W/20' 3/8" TUBE	6



CP-22 Low Profile Pumps

- Reduced Height for Restricted Spaces
- LED Indicators Confirm Pump Status
- Built-in Safety Overflow Switch
- Handles Condensate up to 160° F
- 60 Hz
- 22' Lift

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CP-22LPT	CONDENSATE PUMP - 115V - LOW PROFILE	1
CP-22LP	CONDENSATE PUMP - 120V - LOW PROFILE	1
CP-22LP-230	CONDENSATE PUMP - 230V - LOW PROFILE	6



General Purpose Pumps

- Flow Rate @ Zero Head: 1.2 gallons per minute
- Rated for 120 VAC
- 16' Lift
- Continuous Duty Limit: 140F

CAT. NO.	DESCRIPTION	BOX QTY
PROCP-16	CONDENSATE PUMP 16' LIFT 230V	6



Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

ClearVue™ Mini Ductless System Pump



- Featuring super quiet operation
- Designed for ductless system installations
- Variable Speed and Lift
- Floatless Sensor™



CAT. NO.	DESCRIPTION	BOX QTY
CVMINI	CLEARVUE MINI - DUCTLESS SYSTEM PUMP	6

Internal Condensate Pump

QUIETMINI-I is a compact ultra quiet piston pump (19 dBA) designed for internal installation in minisplits. With a built-in safety overflow switch, built-in check valve to prevent backflow and anti-vibration mounts, these pumps offer easy installation and low maintenance. Universal voltage - 115 - 230V 50/60Hz.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QUIETMINI-I	INTERNAL DUCTLESS CONDENSATE PUMP	10

Undermount Condensate Pump



The QUIETMINI-M Undermount Condensate Pump installs under wall-mounted air conditioners and provides an ultra-quiet running utilizing ultra-quiet diaphragm technology (UQT) within a sleek design. With easy installation and hassle-free maintenance, these quiet pumps are perfect for locations sensitive to noise, like hotels, theaters and meeting rooms. Universal voltage - 115 - 230V 50/60Hz.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
QUIETMINI-M	UNDERMOUNT DUCTLESS CONDENSATE PUMP	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times



- Turns Off Equipment with as Few as 1-2 Drops of Water Detection
- LED Indicators
- Connect Multiple Switches to Expand Protection Area
- Flexible Placement Options
- 4 Wire Installation
- Test Reset Buttons
- 250V Rated

CAT. NO.	DESCRIPTION	BOX QTY
WS-1	WET SWITCH FLOOD DETECTOR	12



- Condensate Overflow Protection
- Clip-On Pan Switch
- Magnetic Reed Switch Operated

CAT. NO.	DESCRIPTION	BOX QTY
CS-3	CONDENSATE SWITCH - CLIP	10



- Detects Rising Water Levels in Drain Pipes
- Shuts Off System, Preventing Water Damage
- Magnetic Reed Switch Operated
- Durable Plastic Construction

CAT. NO.	DESCRIPTION	BOX QTY
CS-1	CONDENSATE SWITCH - TEE	10



Safety Overflow Condensate Float Switch

- Easy to use
- Simple to install
- Large over-clamping Fitting
- Separate float/probe assembly swivels
- Swivel action allows the installer to position the float switch for best operation
- Probe features an inlet grill
- Two wire connection for easy hook up to a thermostat

Wet Switch Flood Detector



Condensate Pan Switch



Pipe Mounted Tee Switch



CAT. NO.	DESCRIPTION	BOX QTY
CC-1	CONDENSATE FLOAT SWITCH	12

Ductless Smooth Drain Line



230-DL16-S is a unique non-kinking drain line for mini-split units, designed specifically with a smooth internal surface. The 16mm / 5/8" Smooth Drain Line resists blockages, improving condensate flow, within mini-split installations. The non-insulated drain hose is available in 98'

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DL16-S	16MM / 5/8" SMOOTH DRAIN LINE	1

Mini-Split Condensate Drain Line



A unique drain line for mini-split units, this large diameter drain line is typical for mini-split installations. Available in 160' or 20' lengths with cut marks every 3.28'. Accommodates 5/8" and 3/4" connections.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DL16	MINI-SPLIT DRAIN LINE, 5/8" ID, 160'	1
230-DL16-20	MINI-SPLIT DRAIN LINE, 5/8" ID, 20'	1

Condensate Drain Pans



230-DPPM



230-DPPL

When a mini-split system operates in heat pump mode, dripping condensation from the outdoor coil can create a slip or ice hazard. Condensate drain pans bolt onto the condenser mounting brackets, controlling the condensate flow while the drain line is plumbed nearby. Includes mounting hardware and drain pan outlet.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DPPL	POLY CONDENSATE DRAIN PAN (LARGE)	1
230-DPPM	POLY CONDENSATE DRAIN PAN (MEDIUM)	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Mini-Split Drain Adapters

Mini-Split fan units — either ceiling cassettes or wall cassettes — typically have a unique, stepped design drain line fitting. These adapters convert this metric fitting to standard drain line tubing sizes.



230-DLFY



230-DLF16

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DLF16	16MM MINI-SPLIT DRAIN LINE ADAPTER	
230-DLF18	18MM MINI-SPLIT DRAIN LINE ADAPTER	
230-DLF20	20MM MINI-SPLIT DRAIN LINE ADAPTER	
230-DLF25	25MM MINI-SPLIT DRAIN LINE ADAPTER	
230-DLF32	32MM MINI-SPLIT DRAIN LINE ADAPTER	
230-DLFY	MINI-SPLIT DRAIN LINE Y	

Asurity[®] Pro-Treat[®] Condensate Drain Pan Treatment

Asurity[®] PROTREAT-217 Condensate Drain Pan Treatment controls odors and eliminates drain pan overflows that cause water damage. 200 economy tablet jar.

(Dosage: 3 tablets per 3 tons per month).



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PROTREAT-217	PRO-TREAT [®] 217 ECONOMY TABLETS	12

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech[®] products please visit www.diversitech.com

SpeediChannel®

SpeediChannel® is an innovative channel system used to cover air conditioning Linesets. The two-part system has a base and a cover. The base is fastened to a wall or ceiling, then a clever little plastic clip (SpeediClip®) snaps into a channel already molded into the base. The cover then simply snaps on top of the base.

The SpeediChannel® system is available in three widths – 3", 4", and 6". Each piece of SpeediChannel® is 6-1/2' long. A complete line of couplings, elbows, and tees are available for the SpeediChannel® system.

Manufactured from rigid PVC, the SpeediChannel® system is a natural color that is a very close match to the typical mini split condensing unit case. The SpeediChannel® system can be painted as desired to match any wall color. The PVC used in the SpeediChannel® system is resistant to UV light, and is UL rated.

SpeediChannel® Installation Kits



The SpeediChannel® installation kit by DiversiTech® provides a simple mix of the basic fittings used in a typical installation job. Included in the kit is one coupling, one wall penetration, one inside elbow, one long radius flat bend, and one pack of 11" cable ties.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-IKC3	3" INSTALLATION KIT NATURAL	1
230-IKC3BK	3" INSTALLATION KIT, BLACK	1
230-IKC3W	3" INSTALLATION KIT WHT	1
230-IKC4	4" INSTALLATION KIT NATURAL	1
230-IKC4BK	4" INSTALLATION KIT, BLACK	1
230-IKC4W	4" INSTALLATION KIT WHT	1

SpeediChannel® Lineset Covers



The SpeediChannel® color lineset cover channel by DiversiTech® is 6-1/2' long and includes a pack of SpeediClips™. It's made of UV resistant PVC material to resist the elements and provide lasting protection.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-D3A	3" LINESSET COVER NATURAL	6
230-D3B	3" LINESSET COVER BROWN	6
230-D3BK	3" LINESSET COVER BLACK	6
230-D3W	3" LINESSET COVER WHITE	6
230-D4A	4" LINESSET COVER NATURAL	6
230-D4B	4" LINESSET COVER BROWN	6
230-D4BK	4" LINESSET COVER BLACK	6
230-D4W	4" LINESSET COVER WHITE	6
230-D6	6" LINESSET COVER NATURAL	6
230-D6BK	6" LINESSET COVER BLACK	6
230-D6W	6" LINE SET COVER WHITE	6

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

SpeediChannel® Flex Hose Kit

The SpeediChannel® flexible hose kit protects the lineset from the condensing unit to the wall. It also provides a quick and easy connection between two lengths of channel over or around obstacles. Included in the kit is (1) 39" flexible hose, (2) duct connectors, (1) end cap, and (1) stainless steel clamp.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-FH3-KIT	3" FLEX HOSE KIT NATURAL	10
230-FH3W-KIT	3" FLEX HOSE KIT WHITE	10
230-FH4-KIT	4" FLEX HOSE KIT NATURAL	10
230-FH4W-KIT	4" FLEX HOSE KIT WHITE	10

SpeediChannel® Caps

The SpeediChannel® cap by DiversiTech® is used to cap the end of a channel. It's made of UV resistant PVC material to resist the elements and provide lasting protection.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DC3	3" CAP NATURAL	10
230-DC3BK	3" CAP BLACK	10
230-DC3W	3" CAP WHITE	10
230-DC4	4" CAP NATURAL	10
230-DC4BK	4" CAP BLACK	10
230-DC4W	4" CAP WHITE	10
230-DC6	6" CAP NATURAL	10
230-DC6W	6" CAP WHITE	10

SpeediChannel® Duct End

The SpeediChannel® duct end by DiversiTech® is used to terminate a run of channel to a small opening just large enough for the lineset and condensate drain line to pass through.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DE3	3" DUCT END NATURAL	10
230-DE3B	3" DUCT END BROWN	10
230-DE3BK	3" DUCT END BLACK	10
230-DE3W	3" DUCT END WHITE	10
230-DE4	4" DUCT END NATURAL	10
230-DE4B	4" DUCT END BROWN	10
230-DE4BK	4" DUCT END BLACK	10
230-DE4W	4" DUCT END WHITE	10
230-DE6	6" DUCT END NATURAL	10
230-DE6W	6" DUCT END WHITE	10

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

SpeediChannel® 90° Inside Elbow



The SpeediChannel® 90° inside elbow by DiversiTech® is used to route the lineset around an inside corner. Each elbow is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-EB3	3" 90° INSIDE ELBOW NATURAL	10
230-EB3B	3" 90° INSIDE ELBOW BROWN	10
230-EB3BK	3" 90° INSIDE ELBOW BLACK	10
230-EB3W	3" 90° INSIDE ELBOW WHITE	10
230-EB4	4" 90° INSIDE ELBOW NATURAL	10
230-EB4B	4" 90° INSIDE ELBOW BROWN	10
230-EB4BK	4" 90° INSIDE ELBOW BLACK	10
230-EB4W	4" 90° INSIDE ELBOW WHITE	10
230-EB6	6" 90° INSIDE ELBOW NATURAL	10
230-EB6BK	6" 90° INSIDE ELBOW BLACK	10
230-EB6W	6" 90° INSIDE ELBOW WHITE	10

SpeediChannel® 90° Outside Elbow



The SpeediChannel® 90° outside elbow by DiversiTech® is used to route the lineset around an inside corner. Each elbow is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-EIN3	3" 90° OUTSIDE ELBOW NATURAL	10
230-EIN3B	3" 90° OUTSIDE ELBOW BROWN	10
230-EIN3BK	3" 90° OUTSIDE ELBOW BLACK	10
230-EIN3W	3" 90° OUTSIDE ELBOW WHITE	10
230-EIN4	4" 90° OUTSIDE ELBOW NATURAL	10
230-EIN4B	4" 90° OUTSIDE ELBOW BROWN	10
230-EIN4BK	4" 90° OUTSIDE ELBOW BLACK	10
230-EIN4W	4" 90° OUTSIDE ELBOW WHITE	10
230-EIN6	6" 90° OUTSIDE ELBOW NATURAL	10
230-EIN6BK	6" 90° OUTSIDE ELBOW BLACK	10
230-EIN6W	6" 90° OUTSIDE ELBOW WHITE	10

SpeediChannel® Adjustable Flat Bend



The SpeediChannel® adjustable flat bend by DiversiTech® bends flex from 45° to 90° and makes it easy to route the lineset around an obstacle. Each adjustable bend is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-AFB3	3" ADJUSTABLE FLAT BEND NATURAL	10
230-AFB3W	3" ADJUSTABLE FLAT BEND WHITE	10
230-AFB4	4" ADJUSTABLE FLAT BEND NATURAL	10
230-AFB4W	4" ADJUSTABLE FLAT BEND WHITE	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

SpeediChannel® 90° Flat Bend

The SpeediChannel® 90° flat bend by DiversiTech® is used to route the lineset around an obstacle. Each bend is individually packed and includes stainless steel screws.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-FB3	3" 90° FLAT BEND NATURAL	10
230-FB3B	3" 90° FLAT BEND BROWN	10
230-FB3BK	3" 90° FLAT BEND BLACK	10
230-FB3W	3" 90° FLAT BEND WHITE	10
230-FB4	4" 90° FLAT BEND NATURAL	10
230-FB4B	4" 90° FLAT BEND BROWN	10
230-FB4BK	4" 90° FLAT BEND BLACK	10
230-FB4W	4" 90° FLAT BEND WHITE	10
230-FB6	6" 90° FLAT BEND NATURAL	10
230-FB6BK	6" 90° FLAT BEND BLACK	10
230-FB6W	6" 90° FLAT BEND WHITE	10

SpeediChannel® 45° Flat Bend

The SpeediChannel® 45° flat bend by DiversiTech® is used to route the lineset around an obstacle. Each bend is individually packed and includes stainless steel screws.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-FB453	3" 45° FLAT BEND NATURAL	10
230-FB453B	3" 45° FLAT BEND BROWN	10
230-FB453BK	3" 45° FLAT BEND BLACK	10
230-FB453W	3" 45° FLAT BEND WHITE	10
230-FB454	4" 45° FLAT BEND NATURAL	10
230-FB454B	4" 45° FLAT BEND BROWN	10
230-FB454BK	4" 45° FLAT BEND BLACK	10
230-FB454W	4" 45° FLAT BEND WHITE	10
230-FB456	6" 45° FLAT BEND NATURAL	10
230-FB456W	6" 45° FLAT BEND WHITE	10

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

SpeediChannel® 90° Long Radius Bend



The SpeediChannel® 90° long radius bend by DiversiTech® is used to route the lineset around an obstacle. The long radius of the elbow allows a gentle bending radius on the copper line set. Each elbow is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-LFB3	3" 90° LONG BEND NATURAL	10
230-LFB3B	3" 90° LONG BEND BROWN	10
230-LFB3BK	3" 90° LONG BEND BLACK	10
230-LFB3W	3" 90° LONG BEND WHITE	10
230-LFB4	4" 90° LONG BEND NATURAL	10
230-LFB4B	4" 90° LONG BEND BROWN	10
230-LFB4BK	4" 90° LONG BEND BLACK	10
230-LFB4W	4" 90° LONG BEND WHITE	10
230-LFB6	6" 90° LONG BEND NATURAL	10
230-LFB6W	6" 90° LONG BEND WHITE	10

SpeediChannel® T-Joint



The SpeediChannel® T-joint by DiversiTech® is used for creating a tee connection between three pieces of equal sized channel. The tee can be combined with the reducing coupling to join channels of different sizes. Each tee is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-TJ4	4" T-JOINT NATURAL	10
230-TJ4B	4" T-JOINT BROWN	10
230-TJ4BK	4" T-JOINT BLACK	10
230-TJ4W	4" T-JOINT WHITE	10
230-TJ6	6" T-JOINT NATURAL	10
230-TJ6W	6" T-JOINT WHITE	10

SpeediChannel® Reducer Coupling



The SpeediChannel® reducer coupling by DiversiTech® is used for joining two different pieces of channel. Each coupling is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-TC34	3"X4" REDUCING COUPLING NATURAL	10
230-TC34W	3"X4" REDUCING COUPLING WHITE	10
230-TC46	4"X6" REDUCING COUPLING NATURAL	10
230-TC46W	4"X6" REDUCING COUPLING WHITE	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

SpeediChannel[®] Union Coupling

The SpeediChannel[®] union coupling by DiversiTech[®] is used for joining two pieces of channel of the same size. Each coupling is individually packed and includes stainless steel screws.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-CP3	3" UNION COUPLING NATURAL	10
230-CP3B	3" UNION COUPLING BROWN	10
230-CP3BK	3" UNION COUPLING BLACK	10
230-CP3W	3" UNION COUPLING WHITE	10
230-CP4	4" UNION COUPLING NATURAL	10
230-CP4B	4" UNION COUPLING BROWN	10
230-CP4BK	4" UNION COUPLING BLACK	10
230-CP4W	4" UNION COUPLING WHITE	10
230-CP6	6" UNION COUPLING NATURAL	10
230-CP6BK	6" UNION COUPLING BLACK	10
230-CP6W	6" UNION COUPLING WHITE	10

SpeediChannel[®] Wall Penetration Cover

The SpeediChannel[®] wall penetration cover by DiversiTech[®] is used to transition from the channel to a through wall penetration. The wall sleeve creates a clean hole through the wall and the lineset is covered by the wall cover.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-WC3	3" WALL PENETRATION COVER NATURAL	10
230-WC3B	3" WALL PENETRATION COVER BROWN	10
230-WC3BK	3" WALL PENETRATION COVER BLACK	10
230-WC3W	3" WALL PENETRATION COVER WHITE	10
230-WC4	4" WALL PENETRATION COVER NATURAL	10
230-WC4B	4" WALL PENETRATION COVER BROWN	10
230-WC4BK	4" WALL PENETRATION COVER BLACK	10
230-WC4W	4" WALL PENETRATION COVER WHITE	10
230-WC6	6" WALL PENETRATION COVER NATURAL	10
230-WC6BK	6" WALL PENETRATION COVER BLACK	10
230-WC6W	6" WALL PENETRATION COVER WHITE	10

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

SpeediChannel® Soffit Fitting



The SpeediChannel® soffit fitting by DiversiTech® is ideal for outdoor applications where the lineset runs up an exterior wall and enters the house vertically through the soffit. Its large, flat surface area easily covers the rough opening cut in the soffit. The two-part soffit fitting easily snaps onto the channel for a clean installation.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-SF3	3" SOFFIT FITTING NATURAL	10
230-SF3BK	3" SOFFIT FITTING BLACK	10
230-SF3W	3" SOFFIT FITTING WHITE	10
230-SF4	4" SOFFIT FITTING NATURAL	10
230-SF4BK	4" SOFFIT FITTING BLACK	10
230-SF4W	4" SOFFIT FITTING WHITE	10

SpeediChannel® Wall Escutcheon



The SpeediChannel® wall escutcheon by DiversiTech® is used to cover a rough opening in a wall or ceiling penetration. The hole in the escutcheon is centered to allow for a free standing channel to penetrate through a wall or ceiling. The two-part wall escutcheon easily snaps onto the channel.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-WR3	3" WALL ESCUTCHEON	10
230-WR3W	3" WALL ESCUTCHEON WHT	10
230-WR4	4" WALL ESCUTCHEON	10
230-WR4W	4" WALL ESCUTCHEON WHT	10
230-WR6	6" WALL ESCUTCHEON	10
230-WR6W	6" WALL ESCUTCHEON WHT	10

SpeediChannel® Flat Wall Escutcheon



The SpeediChannel® flat wall escutcheon by DiversiTech® is typically used to cover a rough opening in a soffit, wall, or ceiling penetration. One side of the escutcheon is flat to allow for a channel run going along a wall and penetrating through an adjacent wall or ceiling. This is the most common type of wall penetration.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-FR3	3" FLAT WALL ESCUTCHEON NATURAL	10
230-FR3W	3" FLAT WALL ESCUTCHEON WHITE	10
230-FR4	4" FLAT WALL ESCUTCHEON NATURAL	10
230-FR4W	4" FLAT WALL ESCUTCHEON WHITE	10
230-FR6	6" FLAT WALL ESCUTCHEON NATURAL	10
230-FR6W	6" FLAT WALL ESCUTCHEON WHITE	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

SpeediChannel® Flex Joint

The SpeediChannel® flex joint by DiversiTech® is a flexible accordion style piece used to route a lineset around virtually any type of obstacle. Each joint is 20 in. long and can be combined together for longer flex runs.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-FJ3	3" FLEX JOINT NATURAL	10
230-FJ3BK	3" FLEX JOINT, BLACK	10
230-FJ3W	3" FLEX JOINT WHITE	10
230-FJ4	4" FLEX JOINT NATURAL	10
230-FJ4BK	4" FLEX JOINT, BLACK	10
230-FJ4W	4" FLEX JOINT WHITE	10
230-FJ6	6" FLEX JOINT NATURAL	10
230-FJ6BK	6" FLEX JOINT, BLACK	10
230-FJ6W	6" FLEX JOINT, WHITE	10

SpeediChannel® Wall Sleeve

The SpeediChannel® wall sleeve is used to transition from the channel through a wall penetration. The wall sleeve creates a clean hole through the wall and the lineset is covered by the wall cover.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-WS3	2-7/8" WALL SLEEVE WHITE	10

SpeediClip™

The SpeediClip™ by DiversiTech® is used to hold the lineset securely in the channel. The clip slides into place on a railing molding into the inside of the channel allowing for single person installation.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-DCLIP-10	SPEEDICLIP™ PK OF	1
230-DCLIP	SPEEDICLIP™ PK OF50	1

Lineset Cover Cutter



The 230-CUTTER is designed to easily cut lineset covers that protect linesets and insulations in HVAC applications. The 230-CUTTER has a ratcheting cutting blade that makes cutting lineset covers easy and clean. It has cutting capacity for various duct sizes, ranging from 1.38" x 1.18" up to 3.54" x 2.55".

SpeediChannel® Bulk Screw

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-SCREW	SPEEDICHANNEL® BULK SCREW	1

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
230-CUTTER	LINESET CUTTER	6

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

EasyGuard[®]

The EasyGuard[®] Lineset Cover system is designed to protect linesets and insulation and meet local code requirements. It is quick and simple to install and ideal for both new and retro-fit installations. Available in 3" and 4" sizes. System works with SpeediClip™ (23D-DCLIP) to keep linesets in place. Paintable.

EasyGuard[®] Installation Kits



The EasyGuard[®] installation kit provides a simple mix of the basic fittings used in a typical installation job. Kit includes: (3) 4 ft long channel duct, (2) union couplings, (1) wall penetration cover, (1) duct end, (1) 90° elbow, and (2) pack of clips & cable ties

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-IKC3W	3" FIT/CHANNEL KIT WHITE	1
EG-IKC4W	4" FIT/CHANNEL KIT WHITE	1


EasyGuard[®] Lineset Covers



The EasyGuard[®] lineset cover channel is 6-1/2' long. It's made of UV resistant PVC material to resist the elements and provide lasting protection.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-D3W	3" LINESET COVER WHITE	8
EG-D4W	4" LINESET COVER WHITE	4

EasyGuard[®] Union Coupling



The EasyGuard[®] coupling is used for joining two pieces of channel. Each coupling is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-CP3W	3" UNION COUPLING WHITE	6
EG-CP4W	4" UNION COUPLING WHITE	6

EasyGuard[®] Duct End



The EasyGuard[®] duct end is used to terminate a run of channel to a small opening large enough for the lineset and condensate drain line to pass through.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-DE3W	3" DUCT END WHITE	6
EG-DE4W	4" DUCT END WHITE	6

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

EasyGuard® 90° Inside Elbow

The EasyGuard® 90° inside elbow is used to route linesets around an inside corner. Each elbow is individually packed and includes stainless steel screws.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-EB3W	3" 90° INSIDE ELBOW WHITE	6
EG-EB4W	4" 90° INSIDE ELBOW WHITE	6

EasyGuard® 90° Outside Elbow

The EasyGuard® 90° outside elbow is used to route linesets around an outside corner. Each elbow is individually packed and includes stainless steel screws.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-EIN3W	3" 90° OUTSIDE ELBOW WHITE	6
EG-EIN4W	4" 90° OUTSIDE ELBOW WHITE	6

EasyGuard® Flat Bend

The EasyGuard® white 90° flat bend is used to route linesets around obstacles. Each bend is individually packed and includes stainless steel screws.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-FB3W	3" 90° FLAT BEND WHITE	6
EG-FB4W	4" 90° FLAT BEND WHITE	6

EasyGuard® Flex Hose Kit

The EasyGuard® flex hose connection kit protects the lineset from the condensing unit to the wall. It also provides a quick connection between two lengths of channel over or around obstacles. The kit includes everything needed for a clean and professional installation.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-FH3W	3" FLEX HOSE KIT WHITE	1
EG-FH4W	4" FLEX HOSE KIT WHITE	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

EasyGuard[®] Soffit Fitting



The EasyGuard[®] soffit fitting is ideal for outdoor applications where the lineset runs up an exterior wall and enters the house vertically through the soffit. The large, flat surface area covers the rough opening cut in the soffit. It easily snaps onto the channel for a clean installation.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-SF3W	3" SOFFIT FITTING WHITE	6
EG-SF4W	4" SOFFIT FITTING WHITE	6

Easy Guard[®] Reducer Coupling



The EasyGuard[®] reducer coupling is used for joining two different sized pieces of channel. Each coupling is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-TC34W	3" X 4" REDUCER WHITE	6

EasyGuard[®] T-Joint



The EasyGuard[®] t-joint is used for creating a tee connection between three pieces of channel with all channel being the same size. The tee can be combined with the reducing coupling to join channel of different sizes. Each tee is individually packed and includes stainless steel screws.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-TJ3W	3" T-JOINT WHITE	6
EG-TJ4W	4" T-JOINT WHITE	6

EasyGuard[®] Wall Covers



The EasyGuard[®] wall cover is used to transition through a wall penetration. The wall sleeve creates a clean hole through the wall and the lineset is covered by the wall cover. Each wall cover is individually packed and includes stainless steel screws to attach the wall cover to the base.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EG-WC3W	3" WALL COVER WHITE	6
EG-WC4W	4" WALL COVER WHITE	6

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Mini-Split Linesets

DiversiTech® Linesets are individually packaged in sturdy corrugated cardboard, designed and tested for individual parcel shipment. Linesets are designed for air conditioning and refrigeration systems. The copper tube is refrigeration-grade tubing to ASTM B280. The suction line is pre-insulated with Armaflex AP pipe insulation. This insulation is a black flexible elastomeric thermal insulation. The expanded closed-cell structure makes it an efficient insulation. They are manufactured without the use of CFC's, HFC's or HCFC's. AP Armaflex contains Microban antimicrobial product protection for added defense against mold on the insulation. DiversiTech® mini-split linesets are similar to standard linesets but come with additional insulation on the liquid line and flared line ends. Copper tubing complies with ASTM B280 for Seamless Copper Tube for ACR.



CAT. NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	ORDER MULTIPLE
D40620250B3B6	25'	1/2"	3/8"	1/4"	1
D40620350B3B6	35'	1/2"	3/8"	1/4"	1
D40620500B3B6	50'	1/2"	3/8"	1/4"	1
D40820250B3B6	25'	1/2"	1/2"	1/4"	1
D40820350B3B6	35'	1/2"	1/2"	1/4"	1
D40820500B3B6	50'	1/2"	1/2"	1/4"	1
D41020250B3B6	25'	1/2"	5/8"	1/4"	1
D41020350B3B6	35'	1/2"	5/8"	1/4"	1
D41020500B3B6	50'	1/2"	5/8"	1/4"	1
D61020250B3B6	25'	1/2"	5/8"	3/8"	1
D61020350B3B6	35'	1/2"	5/8"	3/8"	1
D61020500B3B6	50'	1/2"	5/8"	3/8"	1

Lineset Box

The Lineset Box™ LSB10-W rough-in box is for new construction lineset protection for all types of HVAC installations. It's easy to install and provides superior protection of refrigerant linesets and condensate drain lines. It provides a clean termination point for new construction projects and reserves the bay for the HVAC system installation. It also protects the lineset from damage during construction such as kinks that can drastically increase HVAC installation time.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
LSB10-W	LINESET BOX WHITE	10
LSB10-BL	LINSET BOX BLACK	10

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

DiversiTech® Tear-Resistant Mini-Split Linesets

Designed for mini-split air conditioning systems, DiversiTech offers a new line of tear-resistant linesets that simplify installation and save technician time with no field-applied coating required. A durable polymeric jacket minimizes installation damage and easily conforms to bends, and an expanded closed-cell structure and unique formulation resists moisture vapor intrusion and UV damage. Refrigeration grade copper tubing conforms to ATSM B280. These Mini-Split Tear-Resistant Linesets are available in a wide range of sizes and lengths. Available with or without fittings.



CAT. NO.	LENGTH	INSULATION WALL	SUCTION LINE	LIQUID LINE	ORDER MULTIPLE
D406K0250B3B6	25'	1/2"	3/8"	1/4"	1
D406K0350B3B6	35'	1/2"	3/8"	1/4"	1
D406K0500B3B6	50'	1/2"	3/8"	1/4"	1
D408K0250B3B6	25'	1/2"	1/2"	1/4"	1
D408K0350B3B6	35'	1/2"	1/2"	1/4"	1
D408K0500B3B6	50'	1/2"	1/2"	1/4"	1
D410K0250B3B6	25'	1/2"	5/8"	1/4"	1
D410K0350B3B6	35'	1/2"	5/8"	1/4"	1
D410K0500B3B6	50'	1/2"	5/8"	1/4"	1
D610K0250B3B6	25'	1/2"	5/8"	3/8"	1
D610K0350B3B6	35'	1/2"	5/8"	3/8"	1
D610K0500B3B6	50'	1/2"	5/8"	3/8"	1
D406L0250B3B6	25'	3/4"	3/8"	1/4"	1
D406L0350B3B6	35'	3/4"	3/8"	1/4"	1
D406L0500B3B6	50'	3/4"	3/8"	1/4"	1
D408L0250B3B6	25'	3/4"	1/2"	1/4"	1
D408L0500B3B6	50'	3/4"	1/2"	1/4"	1
D410L0250B3B6	25'	3/4"	5/8"	1/4"	1
D410L0350B3B6	35'	3/4"	5/8"	1/4"	1
D610L0500B3B6	50'	3/4"	5/8"	3/8"	1
D408M0500B3B6	50'	1"	1/2"	1/4"	1
D610M0350B3B6	35'	1"	5/8"	3/8"	1
D610M0500B3B6	50'	1"	5/8"	3/8"	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times



Single Speed Condenser Fan Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard 48 Frame Motor Casing Size
- Standard Shaft Length, Diameter, and Flats
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- Low Power Consumption
- 70° C Ambient Design


- Electrically Reversible
- Electrically Reversible Continuous Air Over
- Quiet Operation
- Extended Studs
- 30" Leads
- 60 HZ
- Shaft Diameter 1/2"



CAT. NO.	HP	VOLTAGE	SPEED	FLA	CASE QTY
WG840727	1/6	208-230	1075/1	1.3	1
WG840728	1/4	208-230	1075/1	2.2	1
WG840729	1/3	208-230	1075/1	2.8	1
WG840730	1/2	208-230	1075/1	4.2	1
WG840731	3/4	208-230	1075/1	4.5	1
WG840204	1/4	208-230	825/1	1.5	1
WG840205	1/3	208-230	825/1	2.2	1



BALL BEARINGS NOW STANDARD

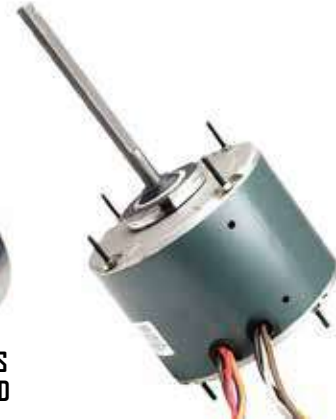

Direct Drive Furnace Blower Motors

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Uses 370V Capacitors
- Standard 48 Frame Motor Casing Size

- 2.5" Diameter Hub Rings included
- Low Power Consumption
- Automatic Thermal Overload Protector
- Continuous Duty, Air Over
- Electrically Reversible

- Class B Insulation
- Speed: 1075/3
- Quiet Operation
- 60 HZ
- Shaft Diameter 1/2"



CAT. NO.	HP	VOLTAGE	SPEED	FLA	CASE QTY
WG840583	1/4	115	1075/3	4.2	1
WG840584	1/4	208-230	1075/3	2.0	1
WG840585	1/3	115	1075/3	5.5	1
WG840586	1/3	208-230	1075/3	2.8	1
WG840587	1/2	115	1075/3	7.5	1
WG840588	1/2	208-230	1075/3	3.6	1
WG840589	3/4	115	1075/3	11.3	1
WG840590	3/4	208-230	1075/3	5.4	1
WG840595	1	115	1075/3	12.6	1
WG840596	1	208-230	1075/3	5.59	1



Multiple Horsepower Condenser Fan Motors

- The Multi-Horsepower motors are specially designed to cover a range of applications
- The condenser fan motors horsepower ranges from 1/2 to 1/5; 1/3 to 1/6 both at 1075 rpm; 1/3 to 1/6 at 825 RPM
- Reversing plugs
- Extended thru bolts
- 36 inch leads
- Designed for 370 Volt capacitors
- Installs with all 48 frame mounting brackets
- Shaft Diameter 1/2"
- 70° C Ambient Design



CAT. NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	CASE QTY
WG840465	CF	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5	-	1
WG840468	CF	208-230	1075/2	1/2-3.0	1/3-2.5	1/4-2.0	1/5-1.3	-	1
WG840469	CF	208-230	825/2	1/3-2.1	1/4-1.7	1/5-1.5	1/6-1.2	-	1

Multiple Horsepower Direct Drive Blower Motors



- Reversing plugs
- Extended thru bolts
- 36 inch leads
- Designed for 370 Volt capacitors
- Installs with all 48 frame mounting brackets
- Shaft Diameter 1/2"

CAT. NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	CASE QTY
WG840463	DDFB	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	1
WG840464	DDFB	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	1
WG840466	DDFB	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	1
WG840467	DDFB	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	1

Utility Fan Motor Kits



- Applications: Evaporators, refrigerators, range hoods, ventilators exhaust fans and unit heaters
- Shaded pole
- Sleeve bearings
- Stud mounting
- Rotation is determined by viewing the shaft end
- Direct Replacements for Delfield, Bohn, Gemline and Nutone
- Assembled with bracket as illustrated
- Includes two prong plug

CAT. NO.	STACK SIZE	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIMENSION	HERTZ	DIRECT REPLACEMENT FOR
6569IM*	5/8"	120	3000	0.64	1	CW	0.181" X 1-5/16"	60	BOHN 5007S, 5018A BOHN 5036F GEMLINE EM691 UPPCO 85

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

Broan - OEM - Motors



- 60 Hertz
- Single phase

CAT. NO.	VOLTAGE	RPM	AMPS	SPEEDS	ROTATION	SHAFT DIAMETER	LENGTH LESS SHAFT	TYPE	BEARINGS	ENCLOSURE	DIRECT REPLACEMENT FOR
69316	120	110	3.40	1	CWSE	1/2" X 3-1/16"	2-1/4"	SP	SLEEVE	OPEN	97009316

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Motor Run Capacitors 370/440 VAC Single Section - Oval



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Approval certifications: UL, cUL, IEC 60252
- Made in USA
- 10 Year Warranty



CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
POCF4A	4	1.50"	2.00"	3.00"	
POCF5A	5	1.25"	2.00"	1.56"	50
POCF7.5A	7.5	1.25"	2.00"	2.19"	50
POCF10A	10	1.25"	2.00"	2.88"	50
POCF12.5A	12.5	1.25"	2.00"	2.88"	50
POCF15A	15	1.25"	2.00"	2.88"	50
POCF20A	20	1.25"	2.00"	2.88"	50
POCF25B	25	1.25"	2.00"	2.88"	50
POCF30A	30	1.25"	2.00"	3.88"	50
POCF35A	35	1.25"	2.00"	3.88"	50
POCF40A	40	1.75"	2.75"	2.91"	50
POCF45A	45	1.75"	2.75"	2.91"	50
POCF50A	50	1.75"	2.75"	2.91"	50
POCF60A	60	1.75"	2.75"	3.91"	50
POCF70A	70	1.75"	2.75"	3.91"	50
POCF80A	80	1.75"	2.75"	3.91"	50

Motor Run Capacitors 370/440 VAC Single Section - Round



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Made in USA
- 10 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
PRCF15A	15	2.10"	3.25"	50
PRCF20A	20	2.25"	3.25"	50
PRCF25A	25	2.25"	4.00"	50
PRCF30A	30	2.10"	4.00"	50
PRCF45A	45	2.25"	4.75"	50
PRCF60A	60	2.25"	4.75"	50
PRCF70A	70	2.25"	6.00"	50
PRCF90A	90	2.75"	4.50"	50

Motor Run Capacitors 370/440 VAC Dual Section - Round



- Manufactured to EIA-456A standards
- Up to 60,000 hours operational life
- Aluminum cans filled with soybean based oil
- UL-801 fault current protection
- RoHS compliant
- Approval certifications: UL, cUL, IEC 60252
- Made in USA
- 10 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
PRCFD255A	25+5	2.00"	2.91"	50
PRCFD305A	30+5	2.00"	2.91"	50
PRCFD3075A	30+7.5	2.00"	2.91"	50
PRCFD355A	35+5	2.00"	3.84"	50
PRCFD3575A	35+7.5	2.00"	3.84"	50
PRCFD405A	40+5	2.00"	3.84"	50
PRCFD4075A	40+7.5	2.00"	3.84"	50
PRCFD455A	45+5	2.00"	3.84"	50
PRCFD4575A	45+7.5	2.00"	3.84"	50
PRCFD505A	50+5	2.00"	3.84"	50
PRCFD5075A	50+7.5	2.00"	3.84"	50
PRCFD555A	55+5	2.75"	2.50"	50
PRCFD5575A	55+7.5	2.50"	2.91"	50
PRCFD605A	60+5	2.50"	2.91"	50
PRCFD6075A	60+7.5	2.50"	2.91"	50
PRCFD705A	70+5	2.625"	4.625"	50
PRCFD7075A	70+7.5	2.50"	4.50"	50
PRCFD7010A	70+10	2.625"	4.625"	50
PRCFD805A	80+5	2.50"	3.91"	50
PRCFD8075A	80+7.5	2.50"	4.625"	50

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

TITAN

Motor Run Capacitors 370/440 VAC Dual Section - Round



- Continuous run
- Dual Capacitance
- Round Metal can
- Designed for continuous run
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TRCFD205	20+5	1.97"	3.74"	50
TRCFD2015	20+15	1.97"	3.94"	50
TRCFD255	25+5	1.97"	3.54"	50
TRCFD2575	25+7.5	1.97"	3.74"	50
TRCFD2515	25+15	1.97"	4.33"	50
TRCFD303	30+3	1.97"	4.33"	50
TRCFD305	30+5	1.97"	3.94"	50
TRCFD3075	30+7.5	1.97"	4.13"	50
TRCFD353	35+3	2.50"	3.74"	50
TRCFD354	35+4	1.97"	4.53"	50
TRCFD355	35+5	1.97"	4.13"	50
TRCFD3575	35+7.5	2.36"	3.54"	50
TRCFD403	40+3	2.50"	3.74"	50
TRCFD405	40+5	2.36"	3.54"	50
TRCFD4075	40+7.5	2.50"	3.74"	50
TRCFD453	45+3	2.50"	3.74"	50
TRCFD455	45+5	2.50"	3.74"	50
TRCFD4575	45+7.5	2.50"	3.74"	50
TRCFD4510	45+10	2.50"	3.74"	50
TRCFD503	50+3	2.50"	3.74"	50
TRCFD505	50+5	2.50"	3.74"	50
TRCFD5075	50+7.5	2.50"	3.74"	50
TRCFD50125	50+12.5	2.50"	3.74"	50
TRCFD553	55+3	2.50"	3.74"	50
TRCFD555	55+5	2.50"	3.74"	50
TRCFD5575	55+7.5	2.50"	3.74"	50
TRCFD603	60+3	2.50"	3.74"	50
TRCFD605	60+5	2.50"	3.74"	50
TRCFD6075	60+7.5	2.50"	3.74"	50
TRCFD6010	60+10	2.50"	3.74"	50
TRCFD705	70+5	2.50"	3.74"	50
TRCFD7075	70+7.5	2.50"	3.74"	50
TRCFD805	*80+5	2.50"	3.74"	50
TRCFD8075	80+7.5	2.50"	3.74"	50
TRCFD8010	80+10	2.50"	3.74"	50

PRO



Motor Run Capacitors 370/440 VAC Single Section - Round



- Continuous run
- Single capacitance
- Round Metal Can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TRCF3	3	1.77"	2.17"	100
TRCF5	5	1.77"	2.17"	100
TRCF6	6	1.77"	2.17"	100
TRCF7.5	7.5	1.77"	2.17"	100
TRCF10	10	1.77"	2.17"	100
TRCF12.5	12.5	1.77"	2.17"	100
TRCF15	15	1.77"	2.56"	100
TRCF17.5	17.5	1.77"	2.76"	100
TRCF20	20	1.77"	2.95"	100
TRCF25	25	1.97"	2.95"	100
TRCF30	30	1.97"	3.35"	100
TRCF35	35	1.97"	3.54"	50
TRCF40	40	1.97"	3.94"	100
TRCF45	45	1.97"	4.33"	50
TRCF50	50	1.97"	4.72"	50
TRCF55	55	1.97"	4.92"	50
TRCF60	60	2.17"	4.53"	50
TRCF70	70	2.17"	4.92"	100
TRCF80	80	2.50"	4.72"	50
TRCF100	110	2.50"	5.31"	50

Motor Run Capacitors 370/440 VAC Single Section - Oval



- Continuous run
- Single capacitance
- Oval Metal Can
- 5 Year Warranty

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
TOCF3	3	1.24"	2.03"	2.17"	100
TOCF4	4	1.24"	2.03"	2.17"	100
TOCF5	5	1.24"	2.03"	2.17"	100
TOCF6	6	1.24"	2.03"	2.56"	100
TOCF7.5	7.5	1.24"	2.03"	2.17"	100
TOCF10	10	1.24"	2.03"	2.56"	100
TOCF12.5	12.5	1.24"	2.03"	2.95"	100
TOCF15	15	1.24"	2.03"	2.95"	100
TOCF17.5	17.5	1.24"	2.03"	3.74"	100
TOCF20	20	1.77"	2.80"	2.68"	100
TOCF25	25	1.77"	2.80"	3.07"	100
TOCF30	30	1.77"	2.80"	3.46"	50
TOCF35	35	1.77"	2.80"	3.86"	50
TOCF40	40	1.77"	2.80"	4.06"	50
TOCF45	45	1.77"	2.80"	4.45"	50
TOCF50	50	1.77"	2.80"	4.84"	50
TOCF60	60	1.80"	3.00"	5.75"	50



Motor Run Capacitors 370/440 VAC Dual Section - Oval

- Continuous run
- Dual capacitance
- Oval Metal can
- 5 Year Warranty



CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
TOCFD154	15+4	1.77"	2.68"	2.68"	50
TOCFD155	15+5	1.77"	2.68"	2.68"	50
TOCFD2015	20+15	1.77"	2.80"	3.86"	50
TOCFD255	25+5	1.77"	2.80"	3.46"	50
TOCFD2575	25+7.5	1.77"	2.80"	3.46"	50
TOCFD2510	25+10	1.77"	2.80"	3.86"	50
TOCFD304	30+4	1.77"	2.80"	3.86"	50
TOCFD305	30+5	1.77"	2.80"	3.86"	50
TOCFD3075	30+7.5	1.77"	2.80"	3.86"	50
TOCFD353	35+3	1.77"	2.80"	4.25"	50

CAT. NO.	UF	DIMENSIONS			CASE QTY
		DEPTH	WIDTH	HEIGHT	
TOCFD354	35+4	1.77"	2.80"	4.25"	50
TOCFD355	35+5	1.77"	2.80"	4.25"	50
TOCFD3575	35+7.5	1.77"	2.80"	4.25"	50
TOCFD405	40+5	1.77"	2.80"	4.65"	50
TOCFD4075	40+7.5	1.87"	3.54"	3.78"	50
TOCFD455	45+5	1.77"	2.80"	5.04"	50
TOCFD505	50+5	1.87"	3.54"	4.37"	50
TOCFD555	55+5	1.87"	3.54"	4.57"	50
TOCFD5510	55+10	1.87"	3.54"	5.16"	50
TOCFD605	60+5	1.87"	3.54"	5.55"	50

Dry AC Motor Run Capacitors 370 VAC

- Commonly used on motors in fans, pumps and blowers
- Constructed with Self-Healing Dielectric Metalized Polypropylene Film
- 1/4 inch blade quick connect terminals; Metal tab mounting bracket
- Capacitance tolerance: +/-5%
- Plastic ABS case
- RoHS compliant
- 2 Blade Quick Connect Terminals
- Operating temperature range: -40°C to 85°C (-40°F to 185°F)



CAT. NO.	HERTZ	UF	DIMENSIONS			CASE QTY
			DEPTH	WIDTH	HEIGHT	
PDC2.2	50/60	2.2	1.50"	1.50"	1.75"	200
PDC4	50/60	4	0.94"	2.00"	2.00"	200
PDC8	50/60	8	1.10"	1.92"	2.20"	200
PDC10	50/60	10	1.25"	2.36"	2.44"	200
PDCFI2.5	50/60	12.5	1.25"	2.36"	2.44"	100



Packard Mini-Split Dry Cell Capacitors

Specifically designed for mini-splits and other equipment with confined space. Constructed with self-healing dielectric metalized polypropylene film.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PMSCF1	1MFD X 450V DRY CELL CAP	1
PMSCF1.5	1.5MFD X 450V DRY CELL CAP	1
PMSCF2	2MFD X 450V DRY CELL CAP	1
PMSCF2.5	2.5MFD X 450V DRY CELL CAP	1
PMSCF3	3MFD X 450V DRY CELL CAP	1
PMSCF3.5	3.5MFD X 450V DRY CELL CAP	1
PMSCF4	4MFD X 450V DRY CELL CAP	1
PMSCF5	5MFD X 450V DRY CELL CAP	1
PMSCF6	6MFD X 450V DRY CELL CAP	1



Images and Specifications may not be representative of all products listed. For the full range of DiversiTech[®] products please visit www.diversitech.com

Motor Start Capacitors 330 VAC



- 50/60 Hertz
- Standard Blade Terminals
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TRMJ21	21-25	1-7/16"	3-3/8"	100
TRMJ25	25-30	1-7/16"	3-3/8"	100
TRMJ30	30-36	1-7/16"	3-3/8"	100
TRMJ36	36-43	1-7/16"	3-3/8"	50
TRMJ43	43-53	1-13/16"	3-3/8"	50
TRMJ56	53-64	1-13/16"	3-3/8"	50
TRMJ64	64-77	1-13/16"	3-3/8"	50
TRMJ72	72-88	1-13/16"	3-3/8"	50
TRMJ88	88-108	2-1/16"	3-3/8"	50
TRMJ108	108-130	2-1/16"	4-3/8"	50
TRMJ108R	108-130	2.15"	4.50"	50
TRMJ124	124-149	2-1/16"	4-3/8"	50
TRMJ130	130-158	2.00"	4.50"	50
TRMJ145	145-174	2.15"	4.60"	50
TRMJ161	161-193	2-1/16"	4-3/8"	50
TRMJ189	189-227	2-1/16"	4-3/8"	50
TRMJ216	216-259	2-9/16"	4-3/8"	25
TRMJ216A	216-259	2.20"	4.50"	50
TRMJ243	243-292	2.25"	3.50"	50
TRMJ270	270-324	2-9/16"	4-3/8"	25
TRMJ270R	270-324	2-3/8"	4-1/2"	25
TRMJ300	300-360	2.72"	4.50"	25

Motor Start Capacitors 110/125 VAC



- Dry Electrolytic Non Polarized Capacitor
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TMJ25	25-30	1-7/16"	2-3/4"	100
TMJ30	30-36	1-7/16"	2-3/4"	100
TMJ36	36-43	1-7/16"	2-3/4"	100
TMJ43	43-53	1-7/16"	2-3/4"	100
TMJ64	64-77	1-7/16"	2-3/4"	100
TMJ72	72-88	1-7/16"	2-3/4"	100
TMJ88	88-108	1-7/16"	2-3/4"	100
TMJ108	108-130	1-7/16"	2-3/4"	100
TMJ124	124-149	1-7/16"	2-3/4"	100
TMJ130	130-156	1-7/16"	2-3/4"	100
TMJ145	145-174	1-7/16"	2-3/4"	100
TMJ161	161-193	1-7/16"	2-3/4"	100
TMJ189	189-227	1-7/16"	2-3/4"	100
TMJ200	200-240	1-7/16"	2-3/4"	100
TMJ216	216-259	1-7/16"	2-3/4"	100
TMJ233	233-280	1-7/16"	2-3/4"	100
TMJ243	243-292	1-7/16"	2-3/4"	100
TMJ270	270-324	1-7/16"	2-3/4"	100
TMJ295	295-354	1-7/16"	2-3/4"	100
TMJ300	300-360	1-7/16"	4-3/8"	100
TMJ324	324-388	1-7/16"	2-3/4"	100
TMJ340	340-408	1-7/16"	3-3/8"	100
TMJ378	378-455	1-7/16"	3-3/8"	25
TMJ378A	378-455	1-13/16"	3-3/8"	50
TMJ400	400-480	1-7/16"	3-3/8"	100
TMJ400A	400-480	1-13/16"	3-3/8"	25
TMJ430	430-516	1-7/16"	3-3/8"	100
TMJ430A	430-516	1-13/16"	3-3/8"	25
TMJ460	460-552	1-7/16"	3-3/8"	100
TMJ460A	460-552	1-13/16"	3-3/8"	50
TMJ540	540-648	1-13/16"	3-3/8"	25
TMJ540A	540-648	1-13/16"	3-3/8"	50
TMJ590	590-708	1-13/16"	4-3/8"	50
TMJ590A	590-708	1-13/16"	3-3/8"	50
TMJ645	645-774	1-13/16"	4-3/8"	50
TMJ708	708-850	1-13/16"	4-3/8"	50
TMJ708A	708-850	2.20"	4.50"	50
TMJ708B	708-850	1-13/16"	3-3/8"	50
TMJ800	800-960	1.90"	3.50"	50
TMJ829	829-995	1-13/16"	4-3/8"	50
TMJ829A	829-995	2.10"	4.50"	50
TMJ860	860-1032	2.00"	3.50"	50
TMJ1000	1000-1200	2-1/16"	4-3/8"	50

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

- Dry Electrolytic Non Polarized Capacitor
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DEPTH	HEIGHT	
TSMJ108	108-130	1.50"	2.90"	100
TSMJ161	161-193	1.50"	3.50"	100
TSMJ189	189-227	1.50"	3.50"	100
TSMJ216	216-259	1.80"	3.50"	50
TSMJ243	243-292	2.00"	3.50"	50
TSMJ270	270-324	2"	3.50"	50
TSMJ540	540-648	1.80"	3.50"	50
TSMJ710A	710-850	2.20"	4.60"	50
TSMJ810A	810-972	2.00"	4.50"	50



- Dry Electrolytic Non Polarized Capacitor
- -40 to 70 Degrees Celsius Rating
- Rated for 3 Second Start
- 20 Starts per Hour

CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TTMJ21	21-25	1-7/16"	2-3/4"	100
TTMJ25	25-30	1-7/16"	2-3/4"	100
TTMJ30	30-36	1-7/16"	2-3/4"	100
TTMJ36	36-43	1-7/16"	2-3/4"	100
TTMJ43	43-53	1-7/16"	2-3/4"	50
TTMJ53	53-64	1-7/16"	3-3/8"	100
TTMJ59	59-71	2.00"	3.00"	50
TTMJ64	64-77	1-7/16"	2-3/4"	100
TTMJ72	72-88	1-13/16"	3-3/8"	50
TTMJ88	88-108	1-13/16"	3-3/8"	50
TTMJ105	105-126	2-1/8"	3-3/8"	50
TTMJ108	108-130	1-13/16"	3-3/8"	50
TTMJ124	124-149	1-13/16"	4-3/8"	50
TTMJ145	145-174	1-13/16"	3-3/8"	50
TTMJ145A	145-174	2.20"	3.50"	50

Motor Start Capacitors 165 VAC



Motor Start Capacitors 220/250 VAC



CAT. NO.	UF	DIMENSIONS		CASE QTY
		DIAMETER	HEIGHT	
TTMJ161	161-193	2.04"	3.38"	50
TTMJ189	189-227	2-1/16"	4-3/8"	50
TTMJ216	216-259	2-1/16"	3-3/8"	50
TTMJ216A	216-259	2-1/16"	4-3/8"	50
TTMJ233	233-280	2.20"	3.50"	50
TTMJ233A	233-280	2.04"	4.37"	50
TTMJ243	243-292	2-1/16"	3-3/8"	50
TTMJ270	270-324	2-1/16"	3-3/8"	50
TTMJ270A	270-324	2.25"	4.50"	50
TTMJ320	320-384	2-1/16"	4-3/8"	50
TTMJ378	378-455	2-9/16"	4-3/8"	50
TTMJ400	400-480	2-1/16"	4-3/8"	50
TTMJ400A	400-480	2.75"	4.50"	50
TTMJ430	430-516	2.60"	4.50"	50

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

RK5 Dual Element Fuses – 250V



- Provides motor overload, ground fault and short-circuit protection
- Class RK5; 250 VAC
- Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current (8 seconds for fuses 30A or less)
- Interrupting Rating 200,000 Amps RMS.Sym.

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLNR001T	1 AMP	10	10
FLNR002T	2 AMP	10	10
FLNR003T	3 AMP	10	10
FLNR03.2T	3.2 AMP	10	10
FLNR005T	5 AMP	10	10
FLNR006T	6 AMP	10	10
FLNR6.25T	6.25 AMP	10	10
FLNR008T	8 AMP	10	10
FLNR010T	10 AMP	10	10
FLNR012T	12 AMP	10	10
FLNR015T	15 AMP	10	10
FLNR020T	20 AMP	10	10
FLNR025T	25 AMP	10	10
FLNR030T	30 AMP	10	10
FLNR035T	35 AMP	10	10
FLNR040T	40 AMP	10	10
FLNR045T	45 AMP	10	10
FLNR050T	50 AMP	10	10
FLNR060T	60 AMP	10	10
FLNR070V	70 AMP	5	5
FLNR080V	80 AMP	5	5
FLNR090V	90 AMP	5	5
FLNR100V	100 AMP	5	5
FLNR125X	125 AMP	EA	1
FLNR150X	150 AMP	EA	1
FLNR0175X	175 AMP	EA	1
FLNR200X	200 AMP	EA	1

RK5 Time Delay Fuses – 600V



- Class RK5; 600 VAC
- Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current (8 seconds for fuses 30A or less)
- Interrupting Rating 200,000 Amps. RMS.Sym.

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLSR01.5T	1.5 AMP	10	10
FLSR005T	5 AMP	10	10
FLSR006T	6 AMP	10	10
FLSR010T	10 AMP	10	10
FLSR012T	12 AMP	10	10
FLSR015T	15 AMP	10	10
FLSR020T	20 AMP	10	10
FLSR025T	25 AMP	10	10
FLSR030T	30 AMP	10	10
FLSR035T	35 AMP	10	10
FLSR040T	40 AMP	10	10
FLSR045T	45 AMP	10	10
FLSR050T	50 AMP	10	10
FLSR060T	60 AMP	10	10
FLSR070V	70 AMP	5	5
FLSR080V	80 AMP	5	5
FLSR090V	90 AMP	5	5
FLSR100V	100 AMP	5	5
FLSR125X	125 AMP	1	1
FLSR150X	150 AMP	1	1
FLSR175X	175 AMP	1	1
FLSR200X	200 AMP	1	1
FLSR400X	400 AMP	1	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times



Class G Time Delay Fuses

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
SLC002T	3 AMP	10	10
SLC003T	3 AMP	10	10
SLC005T	5 AMP	10	10
SLC006T	6 AMP	10	10
SLC010T	10 AMP	10	10
SLC015T	15 AMP	10	10
SLC020T	20 AMP	10	10
SLC025T	25 AMP	10	10
SLC030T	30 AMP	10	10
SLC035T	35 AMP	10	10
SLC040T	40 AMP	10	10
SLC060T	60 AMP	10	10

- General purpose for use in 120/208 and 277/480 circuits. Ideal for fluorescent fixture protection
- Light inductive loads including motors, solenoids, etc. (For additional delay, refer to Edison EDCC or JDL)
- Branch circuit rated for 480 VAC
- 100,000 RMS Sym Amps
- Compact size features varying length rejection feature
- Time-delay of 12 sec. min. at 200% for amp sizes 6 through 60



Class J Time Delay Fuses - 600V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
JTDO10T	10 AMP	10	10
JTDO15T	15 AMP	10	10
JTDO20T	20 AMP	10	10
JTDO25T	25 AMP	10	10
JTDO30T	30 AMP	10	10
JTDO35T	35 AMP	10	10
JTDO40T	40 AMP	10	10
JTDO45T	45 AMP	10	10
JTDO50T	50 AMP	10	10
JTDO60T	60 AMP	10	10
JTDO70V	70 AMP	5	5
JTDO80V	80 AMP	5	5
JTD100T	100 AMP	5	5

- Dual-Element, Time-Delay - 10 seconds (minimum) at 500% rated current
- True dual-element fuses with a minimum 10 second time-delay at 500% overload
- High interrupting rating to safely interrupt overcurrents up to 300kA
- High degree of current limitation due to the fast speed-of-response to short-circuits
- Reduces let-through thermal and magnetic forces in order to protect low withstand rated components
- Proper sizing provides "No Damage" Type "2" coordinated protection for NEMA and IEC motor control in accordance with IEC Standard 947-4-1



Class CC Fast Acting Fuses - 600V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLKRO01T	1 AMP	10	10
KLKRO02T	2 AMP	10	10
KLKRO03T	3 AMP	10	10
KLKRO04T	4 AMP	10	10
KLKRO05T	5 AMP	10	10
KLKRO06T	6 AMP	10	10
KLKRO08T	8 AMP	10	10
KLKRO10T	10 AMP	10	10
KLKRO15T	15 AMP	10	10
KLKRO20T	20 AMP	10	10
KLKRO25T	25 AMP	10	10
KLKRO30T	30 AMP	10	10

- Fast-acting fuse
- Rejection type; for both standard holders or those which reject other type fuses



Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Class CC Fuses - 600V - Branch Circuits



- A superior all-purpose, space-saving control/branch circuit fuse that meet most protection requirements up to 30 amps
- Can be used where either a time-delay or a fast-acting fuse is needed
- Maximum 200kA interrupting rating for available fault current in today's large capacity systems
- Time-delay to avoid unwanted fuse openings from surge currents
- Superior Motor Protection for small horsepower motor circuits.
- For high inrush time-delay applications

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
CCMR.250TXP	0.25 AMP	10	10
CCMR.500TXP	0.50 AMP	10	10
CCMR.600TXP	0.60 AMP	10	10
CCMR.800TXP	0.80 AMP	10	10
CCMR001TXP	1 AMP	10	10
CCMR1.25TXP	1.25 AMP	10	10
CCMR002TXP	2 AMP	10	10
CCMR2.25TXP	2.25 AMP	10	10
CCMR003TXP	3 AMP	10	10
CCMR004TXP	4 AMP	10	10
CCMR005TXP	5 AMP	10	10
CCMR006TXP	6 AMP	10	10
CCMR6.25TXP	6.25 AMP	10	10
CCMR007TXP	7 AMP	10	10
CCMR075TXP	75 AMP	10	10
CCMR008TXP	8 AMP	10	10
CCMR010TXP	10 AMP	10	10
CCMR012TXP	12 AMP	10	10
CCMR015TXP	15 AMP	10	10
CCMR020TXP	20 AMP	10	10
CCMR025TXP	25 AMP	10	10
CCMR030TXP	30 AMP	10	10
CCMR035T	35 AMP	10	10
CCMR040T	40 AMP	10	10
CCMR050TXP	50 AMP	10	10

Class CC Time Delay Fuses - 600V - Control Circuits



- For control circuit transformer protection
- For high inrush time-delay applications

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLDR.200TXP	0.20 AMP	10	10
KLDR.500TXP	0.50 AMP	10	10
KLDR.800TXP	0.80 AMP	10	10
KLDR001TXP	1 AMP	10	10
KLDR002TXP	2 AMP	10	10
KLDR003TXP	3 AMP	10	10
KLDR004TXP	4 AMP	10	10
KLDR005TXP	5 AMP	10	10
KLDR006TXP	6 AMP	10	10
KLDR007TXP	7 AMP	10	10
KLDR008TXP	8 AMP	10	10
KLDR010TXP	10 AMP	10	10
KLDR012TXP	12 AMP	10	10
KLDR015TXP	15 AMP	10	10
KLDR020TXP	20 AMP	10	10
KLDR025TXP	25 AMP	10	10
KLDR030TXP	30 AMP	10	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times



Class K5 - One Time Fuses - 250V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
NLN010	10 AMP	10	10
NLN012	12 AMP	10	10
NLN015	15 AMP	10	10
NLN020	20 AMP	10	10
NLN025	25 AMP	10	10
NLN030	30 AMP	10	10
NLN035	35 AMP	10	10
NLN040	40 AMP	10	10
NLN045	45 AMP	10	10
NLN050	50 AMP	10	10
NLN060	60 AMP	5	5
NLN070	70 AMP	5	5
NLN080	80 AMP	5	5
NLN090	90 AMP	5	5
NLN100	100 AMP	5	5

- Economical
- 50kA Interrupting Rating
- Non-Indicating
- For General Purpose Use



Class K5 - One Time Fuses - 600V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
NLS010T	10 AMP	10	10
NLS015T	15 AMP	10	10
NLS020T	20 AMP	10	10
NLS030T	30 AMP	10	10

- Economical
- 50kA Interrupting Rating
- Non-Indicating
- For General Purpose Use



Class T - Fast Acting Fuses - 300V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
JLLN100V	100 AMP	10	1
JLLN200P	200 AMP	10	1

- Fast Acting
- The Most Compact Fuses Available with Ratings Above 30 Amps
- Current Limiting Design Reduces Damage Caused by Heating and Magnetic Effects.
- Provides Protection of Individual Electric Services and Motors



Class T - Fast Acting Fuses - 600V

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
JLLS010T	10 AMP	10	10
JLLS015T	15 AMP	10	10
JLLS020T	20 AMP	10	10
JLLS025T	25 AMP	10	10
JLLS030T	30 AMP	10	10
JLLS035T	35 AMP	10	10
JLLS040T	40 AMP	10	10
JLLS045T	45 AMP	10	10
JLLS050T	50 AMP	10	10
JLLS060T	60 AMP	10	10
JLLS080T	80 AMP	5	5
JLLS600X	600 AMP	1	1

- Fast Acting
- Compact
- More Space Efficient than 3-Pole Class T Fuses
- Current Limiting Design Reduces Damage Caused by Heating and Magnetic Effects.
- Used for Variable Speed Drives, Power Conversion, Compact Main Switches.



Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Midget Fast Acting Fuses - 600V



- Use with street lighting holders, HID lighting, control circuits, electronic equipment protection
- Compact dimensions
- Interrupting Rating: 100kA RMS Amps
- Fast-acting design responds quickly to both overloads and short-circuit current



- 10x35mm
- Fast Acting
- Ensures Reliable Overcurrent Protection
- Used for Street Lighting, Meeting, Electronic Circuits



- 10x38mm Size
- Fast Acting
- Ensures Quality Backup Overcurrent Protection
- Used for Solar, Combiner Boxes, Inverters, Power Supplies

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLK002	2 AMP	10	10
KLK003	3 AMP	10	10
KLK03.5T	3.5 AMP	10	10
KLK010	10 AMP	10	10
KLK015	15 AMP	10	10

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
BLS001T	1 AMP	10	10
BLS002T	2 AMP	10	10
BLS003T	3 AMP	10	10
BLS005T	5 AMP	10	10

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
KLKD.500T	0.50 AMP	10	10
KLKD01.5T	1.5 AMP	10	10
KLKD005T	5 AMP	10	10
KLKD010T	10 AMP	10	10
KLKD015T	15 AMP	10	10
KLKD020T	20 AMP	10	10
KLKD030T	30 AMP	10	10

Midget Time Delay Fuses - 500V



- Supplemental protection of transformers, solenoids, and other high inrush circuits
- Interrupting Rating: 10kA RMS Amps
- Compact dimensions
- Fiber tube construction
- Time-delay allows harmless inductive surges to pass without needless fuse opening

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLQ001T	1 AMP	10	10
FLQ002T	2 AMP	10	10
FLQ003T	3 AMP	10	10
FLQ004T	4 AMP	10	10
FLQ005T	5 AMP	10	10
FLQ007T	7 AMP	10	10
FLQ010T	10 AMP	10	10
FLQ015T	15 AMP	10	10
FLQ020T	20 AMP	10	10
FLQ025T	25 AMP	10	10
FLQ030T	30 AMP	10	10

Midget Time Delay Fuses - 250V



- Supplemental protection of small motors, transformers, solenoids, and other high inrush power electronic circuits
- Compact dimensions
- Fiber tube construction
- Interrupting Rating: 10kA RMS Amps @125V
- Dual-element construction allows harmless inductive surges to pass without opening

CAT. NO.	AMPERAGE	BOX QTY	ORDER MULTIPLE
FLM001T	1 AMP	10	10
FLM002T	2 AMP	10	10
FLM003T	3 AMP	10	10
FLM005T	5 AMP	10	10
FLM010T	10 AMP	10	10
FLM015T	15 AMP	10	10
FLM020T	20 AMP	10	10
FLM025T	25 AMP	10	10
FLM030T	30 AMP	10	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times



Box Cover Units



620-608

- Maximum Amps: 15
- Maximum AC voltage of 125
- Designed for use with the Type T plug fuses

CAT. NO.	DESCRIPTION	BOX QTY
620-6081	PLUG FUSE BASE ONLY (ESOU)	50
620-6082	RECEPTACLE/FUSE COMBO (ESRU)	60
620-6083	SWITCH/FUSE COMBO SQUARE (ESSY)	50

- For fusing all control circuits up to 30 amp
- Features rigid plastic protective covering.
- Used on AC and DC circuits.

CAT. NO.	DESCRIPTION	CASE QTY
FH-1	IN-LINE FUSE HOLDER	100



Fuse Pullers



626-38071



626-38073

CAT. NO.	DESCRIPTION	CASE QTY
626-38071	FOR FUSE SIZES 1/4" TO 1/2"	1
626-38073	FOR FUSE SIZES 1" TO 1-3/4"	1



Blade (Auto) Fuses 32V



CAT. NO.	AMPERAGE	ORDER MULTIPLE
AT0003V	3 AMP	5
AT0004V	4 AMP	5
AT0005V	5 AMP	5
AT007.5V	7.5 AMP	5
AT0010V	10 AMP	5
AT015V	15 AMP	5
AT0020V	20 AMP	5
AT0030V	30 AMP	5

In-Line Fuse Holder



Fuse Adapters



626-38632



626-38636

- Fuse adapters are used to retrofit fuses into existing installations
- Class H/S
- UL & CSA Listed

CAT. NO.	DESCRIPTION	BOX QTY	ORDER MULTIPLE
626-38632	60 TO 30 REDUCER FOR CLASS H, 250V	10	1
626-38636	60 TO 30 REDUCER FOR CLASS H, 600V	10	1
626-ESA15	15 AMP TYPE S FUSES	4	4

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Fuseblocks - Class CC



- DIN Rail Mountable
- Space Saving Design
- Designed to Help to Prevent Insertion of Incorrect Fuses
- Made with High Strength Materials

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
L60030C2C	2 POLE BOX LUG CLASS CC, 600V	1

Fuseblocks - Class R



- DIN Rail Mountable
- Space Saving Design
- Designed to Help to Prevent Insertion of Incorrect Fuses
- Made with High Strength Materials

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
250V		
LFR250302C	2 POLE CLASS R 250V 30A	1
LFR250303C	3 POLE CLASS R 250V 30A	1
LFR250603CID	3 POLE CLASS R 250V 60A	1
600V		
LFR600302CID	2 POLE CLASS R 600V 30A	1
LFR600303CID	3 POLE CLASS R 600V 30A	1
LFR600603CID	3 POLE CLASS R 600V 60A	1
LFR601003CID	3 POLE CLASS R 600V 100A	1

Power Distribution Block



- Designed for HVAC and Elevator Systems
- Offer a Safe Way of Splicing Cables

CAT. NO.	POLES	ORDER MULTIPLE
LDI440IZ	1	1
LFD25703Z	3	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Mini-Split Installation Kits



FIG. 1

FIG. 2

- Kits Include: Disconnect, Surge Protection, Liquid Tight Whip, Drain Line Fitting, & Wall Sleeves
- 60 Amp Fused and Non-Fused Disconnects
- Side Opening Disconnects
- 180° Access with Wide Opening Door
- Disconnect is NEMA Type 3R Rated for Rain and Sleet Resistance
- Heavy Duty Metal Shell
- Pre-Wired Whip comes with Fittings Pre-Installed

CAT. NO.	FIG.	DISCONNECT TYPE	DISCONNECT AMPS	FUSIBLE	WHIP SIZE
MSK003-6	1	DDS-60U	60	NO	3/4" X 6'
MSK003F-6	2	DDS-60	60	YES	3/4" X 6'
MSK012-6	1	DDS-60U	60	NO	1/2" X 6'

Universal Round Hot Surface Igniter Kit

- More Durable than Carbon
- Universal



CAT. NO.	VOLTAGE	MATERIAL	CASE QTY
IG100N	120	SILICON NITRIDE	40
IG80V	80	SILICON NITRIDE	40

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Liquid Tight Flexible Conduit



- Type B Non-metallic liquidtight conduit
- For outside, inside and industrial uses
- Motor & Controls Installations
- HVAC Applications
- Power Distribution to Equipment
- Machine Tool Applications
- Transformer Terminations
- Outdoor lighting Applications
- Joins with metallic or non-metallic connectors
- 176° (80°C) Rated
- Non-conductive and non-corrosive
- Lightweight for easy handling, transportation, and installation
- Resistant to oil, acid, ozone, and alkaline
- Crush, abrasion, and strain resistant
- Smooth interior ideal for pulling cable
- Easy to cut into lengths, no jagged edges
- Maintains internal I.D. even in tight radius bends
- UL Listed for use as indicated in Article 351 of the 1987 NEC and Section 12-1300 of the 2002 Canadian Electrical Code, Part I
- UL Listed for outdoor use
- UV resistant

CAT. NO.	DESCRIPTION	CASE QTY
750-12100	1/2" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-12100BOX	1/2" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL IN BOX	1
750-121000*	1/2" X 1000' LIQUID TITE CONDUIT - NON-METALLIC, 1000' PER ROLL	1
750-34100	3/4" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-34800*	3/4" X 800' LIQUID TITE CONDUIT - NON-METALLIC, 800' PER ROLL	1
750-10100	1" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-10500*	1" X 500' LIQUID TITE CONDUIT - NON-METALLIC 500' PER ROLL	1
750-125100	1-1/4" X 100' LIQUID TITE CONDUIT - NON-METALLIC, 100' PER ROLL	1
750-1550	1-1/2" X 50' LIQUID TITE CONDUIT - NON-METALLIC, 50' PER ROLL	1
750-2050*	2" X 50' LIQUID TITE CONDUIT - NON-METALLIC, 50' PER ROLL	1

***Must Ship LTL Freight; \$750 Order to qualify for freight allowed**

DiversiWhips



- Liquid tight flexible conduit system
- A labor saving convenience kit for A/C unit hookup
- Also use for heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting
- Three distinct wire colors for ease of hook up
- One (1) straight and one (1) 90° metallic or non-metallic connector
- 90° connector is removable for straight connections.
- (Second straight connector not included.)
- Bagged for Pegboard Display Hanging

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
6-12-4	1/2 X 4' #10 THHN WIRE - METALLIC CONNECTORS	1
6-12-6	1/2 X 6' #10 THHN WIRE - METALLIC CONNECTORS	1
6-34-4	3/4 X 4' #8 THHN WIRE - METALLIC CONNECTORS	6
6-34-6	3/4 X 6' #8 THHN WIRE - METALLIC CONNECTORS	1
6-34-8	3/4" X 8' #8 THHN WIRE - METALLIC CONNECTORS	3
6-12-4NM	1/2 X 4' #10 THHN WIRE - NON-METALLIC CONNECTORS	1
6-12-6NM	1/2 X 6' #10 THHN WIRE - NON-METALLIC CONNECTORS	1
6-34-4NM	3/4 X 4' #8 THHN WIRE - NON-METALLIC CONNECTORS	1
6-34-6NM	3/4 X 6' #8 THHN WIRE - NON-METALLIC CONNECTORS	1
6-34-8NM	3/4" X 8' #8 THHN WIRE - NON-METALLIC CONNECTORS	3

DiversiWhips Pallet Packs



- DiversiWhips are now available in a convenient, bulk packaged pallet pack at a discounted price
- (1) straight and (1) 90° non-metallic connector

CAT. NO.	DESCRIPTION	CASE QTY
B6-12-4NM*	1/2 X 4' #10 THHN WIRE - NON-METALLIC CONNECTORS	90
B6-12-6NM*	1/2 X 6' #10 THHN WIRE - NON-METALLIC CONNECTORS	60
B6-34-6NM*	3/4 X 6' #8 THHN WIRE - NON-METALLIC CONNECTORS	45

***Must Ship LTL Freight; \$750 Order to qualify for freight allowed**



Liquid Tight Connectors - Straight - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15240	3/8"	1.46"	1.20"	0.48"	25	250
15241	1/2"	1.46"	1.20"	0.56"	25	250
15242	3/4"	1.46"	1.46"	0.71"	15	150
15243	1"	1.87"	1.69"	0.94"	8	80
15244	1-1/4"	2.06"	2.17"	1.24"	5	50
15245	1-1/2"	2.07"	2.44"	1.45"	4	40
15246	2"	2.01"	2.87"	1.86"	2	20
15247	2-1/2"	3.33"	3.39"	2.22"	-	12
15248	3"	3.50"	4.09"	2.76"	-	12
15249	3-1/2"	4.05"	4.90"	3.05"	-	6
15250	4"	4.09"	5.04"	3.62"	-	6



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



Liquid Tight Connectors - Straight - Insulated - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15251	3/8"	1.52"	1.20"	0.48"	25	250
15252	1/2"	1.52"	1.20"	0.56"	25	250
15253	3/4"	1.52"	1.46"	0.71"	15	150
15254	1"	1.93"	1.69"	0.94"	8	80
15255	1-1/4"	2.08"	2.17"	1.24"	5	50
15256	1-1/2"	2.15"	2.44"	1.45"	4	40
15257	2"	2.08"	2.87"	1.86"	2	20
15258	2-1/2"	3.41"	3.39"	2.22"	-	10
15259	3"	3.58"	4.09"	2.76"	-	10
15260	3-1/2"	4.07"	4.86"	3.33"	-	6
15261	4"	4.17"	5.04"	3.62"	-	6



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut



90° Liquid Tight Connectors - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15280	3/8"	0.48"	1.26"	2.04"	15	150
15281	1/2"	0.56"	1.26"	2.10"	15	150
15282	3/4"	0.71"	1.52"	2.36"	10	100
15283	1"	0.94"	1.77"	2.93"	5	50
15284	1-1/4"	1.24"	2.20"	3.34"	4	40
15285	1-1/2"	1.45"	2.46"	3.74"	2	20
15286	2"	1.86"	2.93"	4.21"	1	10
15287	2-1/2"	2.22"	3.54"	5.31"	-	6
15288	3"	2.76"	4.25"	6.47"	-	4
15289	3-1/2"	3.54"	4.86"	6.47"	-	3
15290	4"	3.62"	5.24"	6.90"	-	3




- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KD using the Sealing Washer and Locknut

90° Liquid Tight Connectors - Insulated Throat - Zinc Die Cast




CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15291	3/8"	0.48"	1.26"	2.09"	15	150
15292	1/2"	0.56"	1.26"	2.15"	15	150
15293	3/4"	0.71"	1.52"	2.69"	10	100
15294	1"	0.94"	1.77"	2.98"	5	50
15295	1-1/4"	1.24"	2.20"	3.40"	4	40
15296	1-1/2"	1.45"	2.46"	3.80"	2	20
15297	2"	1.86"	2.93"	4.27"	1	10
15298	2-1/2"	2.22"	3.54"	5.39"	-	6
15299	3"	2.76"	4.25"	6.13"	-	4
15300	3-1/2"	3.33"	4.86"	6.55"	-	3
15301	4"	3.62"	5.24"	6.98"	-	3

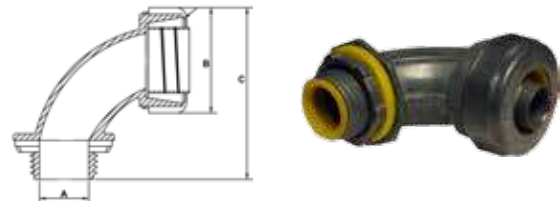

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided


Liquid Tight Connectors - Straight - Insulated Throat - Malleable Iron



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15160	3/8"	1.01"	0.24"	1.19"	25	250
15161	1/2"	0.91"	0.55"	1.30"	25	250
15162	3/4"	0.98"	0.59"	1.50"	10	100
15163	1"	1.14"	0.63"	1.81"	5	50
15164	1-1/4"	1.22"	0.67"	2.20"	5	50
15165	1-1/2"	1.30"	0.43"	2.44"	10	50
15166	2"	1.50"	0.73"	2.95"	5	25


Liquid Tight Connectors - 90° - Insulated Throat - Malleable Iron



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15160	3/8"	1.01"	0.24"	1.19"	25	250	
15181	1/2"	1.42"	0.55"	1.30"	1.76"	10	100
15182	3/4"	1.73"	0.59"	1.50"	2.01"	10	100
15183	1"	2.01"	0.65"	1.81"	2.13"	5	50
15184	1-1/4"	2.30"	0.67"	2.20"	2.32"	-	10
15185	1-1/2"	2.62"	0.71"	2.44"	2.60"	-	10
15186	2"	2.99"	0.73"	2.95"	3.03"	-	5


Liquid Tight Connectors - 45° - Insulated Throat - Malleable Iron



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
15220	3/8"	1.39"	0.49"	1.03"	1.18"	15	150
15221	1/2"	1.89"	0.55"	1.30"	1.34"	10	100
15222	3/4"	1.97"	0.59"	1.50"	1.57"	10	100
15223	1"	2.60"	0.65"	1.81"	1.81"	5	50
15224	1-1/4"	2.76"	0.67"	2.20"	2.09"	-	10
15225	1-1/2"	3.11"	0.71"	2.44"	2.36"	-	10
15226	2"	3.66"	0.73"	2.95"	2.64"	-	5

Liquid Tight Connectors - Straight - Insulated Throat - Steel



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
15200	3/8"	0.98"	0.19"	1.72"	20	200
15201	1/2"	0.91"	0.47"	1.12"	25	250
15202	3/4"	1.02"	0.53"	1.37"	10	100
15203	1"	1.12"	0.65"	1.70"	5	50
15204	1-1/4"	1.26"	0.67"	2.07"	5	50
15205	1-1/2"	1.46"	0.69"	2.30"	10	50
15206	2"	1.50"	0.73"	2.80"	5	25

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Liquid Tight Connectors

- For use with metallic and non metallic liquid tight conduit, Type B
- Provides smooth connection
- No sharp edges to damage wire
- Wire easily pulled through

CAT. NO.	DESCRIPTION	BOX QTY	OUTER BOX
750-NMLT50	1/2" NON-METALLIC STRAIGHT CONNECTOR	25	600
750-NMLT75	3/4" NON-METALLIC STRAIGHT CONNECTOR	10	480
750-NMLT9050	1/2" NON-METALLIC 90° ELBOW CONNECTOR	10	480
750-NMLT9075	3/4" NON-METALLIC 90° ELBOW CONNECTOR	10	240



STRAIGHT



90°



Single Piece Liquid Tight Fittings

- Conduit threads onto ferrule and up inside the outer body
- Inside taper squeezes down on conduit for superior liquid tight seal
- Cut portion of conduit does not show, giving a more finished appearance
- Easy to use at a lower cost than regular liquid tight fittings

CAT. NO.	DESCRIPTION	INNER BOX	OUTER BOX
750-SLTC50	1/2" STRAIGHT SCREW-ON FITTING	25	600
750-SLTC9050	1/2" 90° SCREW-ON FITTING	25	600
750-SLTC75	3/4" STRAIGHT SCREW-ON FITTING	25	600
750-SLTC9075	3/4" 90° SCREW-ON FITTING	25	600



STRAIGHT




90°



Non-Metallic Liquid Tight Connectors - Straight

- Terminate and Seal Non-Metallic Liquid-tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
21813	1/2"	1.18"	0.55"	1.42"	25	150
21814	3/4"	1.20"	0.64"	1.69"	10	100
21815	1"	1.23"	0.72"	2.02"	5	50
21816	1-1/4"	2.44"	0.76"	2.40"	5	50
21817	1-1/2"	2.70"	0.80"	2.67"	4	40
21818	2"	2.99"	0.85"	3.28"	2	20



Non-Metallic Liquid Tight Connectors - 90°

- Terminate and Seal Non-Metallic liquid-tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
21823	1/2"	2.84"	0.50"	2.03"	25	150
21824	3/4"	3.25"	0.50"	2.33"	10	100
21825	1"	3.54"	0.60"	2.95"	5	50
21826	1-1/4"	4.75"	0.76"	5.20"	3	30
21827	1-1/2"	4.75"	0.80"	5.20"	2	20
21828	2"	5.42"	0.86"	5.80"	1	10



Disconnect - Molded Case



- 60A non-fusible molded case disconnect switch is housed in a lightweight, NEMA 3R case
- Single Phase, 2 wire, 240 VAC; or split phase, 3 wire 240 VAC
- Molded Case Switch with color coded On/Off Indicators
- #3 TO #14 Line, Load & Ground terminals
- Features a side opening door with more than 180° access full dead front, and a locking tab
- 1/2", 3/4" & 1" KOs on 4 sides

CAT. NO.	DESCRIPTION	CASE QTY
DDS-60SW	60A NON FUSIBLE DISCONNECT SWITCH	10

Disconnect with Surge Protection



- NEMA Type 3R
- Pre-installed surge protector
- Automatic reset to handle multiple surge events
- Includes: DiversiTech DDS-60U & Ditek DTK-120/240CM
- Automatic reset to handle multiple surge events
- Highly visible diagnostic LED
- 3 Year \$7,500 Residential Connected Equipment Warranty

CAT. NO.	HINGE TYPE	FUSIBLE	AMPS	CASE QTY
DDS-30-SURGE	SIDE	YES	30	6
DDS-60-SURGE	SIDE	YES	60	6
DDS-60U-SURGE	SIDE	NO	60	6

Disconnects Non-Metallic Case



- New Designed A/C Non-Metallic Disconnect
- Single Phase
- Rear Entry Knockouts
- Nema 3R Enclosure
- Rain Proof



CAT. NO.	HINGE TYPE	FUSIBLE	PHASE	AMPS	ORDER MULTIPLE
PD-NM-30F	SIDE	YES		30	6
PD-NM-60F	SIDE	YES		60	
PD-NM-60NF	SIDE	NO		60	

Disconnect with Built-in GFCI Outlet



- Weather and Tamper resistant 20A GFCI receptacles
- Compact design to save space
- NEMA 3R Enclosure allowing cord exit
- Lockable top opening design

CAT. NO.	HINGE TYPE	FUSIBLE	AMPS	CASE QTY
DDS-60U-GFCI-20A	TOP	NO	60	6



Disconnects - Metal Case

- Fused models designed with fuses in pull out handle for easy replacement
- Fused models have indicator lights for blown fuses
- The line, load, and ground terminals are aligned for ease of wiring
- Side open door opens more than 180° for maximum access and has a full dead front
- Rain tight and sleet resistant
- The UL Listed number is 1RFB, NEMA Type 3R and the US Patent is 6,630,637



CAT. NO.	DESCRIPTION	CASE QTY
DDS-30	30A FUSIBLE DISCONNECT SWITCH	10
DDS-60	60A FUSIBLE DISCONNECT SWITCH	10
DDS-60U	60A NON-FUSIBLE DISCONNECT SWITCH	10



Low Profile Disconnects Metal Case

- Non-Fusible pull out disconnect switch
- Side opening door with a full dead front
- Rain tight and sleet resistant
- Available with pre-installed 6' 1/2" NM whip
- NEMA Type 3R



CAT. NO.	DESCRIPTION	CASE QTY
EDS-60U	60A NON-FUSIBLE DISCONNECT SWITCH	10
EDS-12-6NM	DISCONNECT AND WHIP COMBO KIT	3



Top Opening Disconnects

- Newly designed A/C Metal Disconnect
- Single Phase
- Easy Wire Hook Up
- Rear Entry Knockouts
- Full Dead Front
- Heavy Gage Steel
- Rain Proof



CAT. NO.	HINGE TYPE	FUSIBLE	PHASE	AMPS	CASE QTY
PD30F	TOP	YES	I	30	6
PD60F	TOP	YES	I	60	6
PD60NF	TOP	NO	I	60	6

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

3 Pole Switch for Mini-Splits



Three-pole, 30 Amp, 600 Volt rated disconnect switch provides safe, reliable manual ON/OFF switching control for mini-splits and HVAC systems. This switch meets the local code requirements of breaking both the power lines (L1 and L2) and the communication line of the mini-split's indoor unit for service.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
755-303SW	3 POLE SWITCH FOR MINI-SPLITS	1

GFCI 125V



- Offering Includes: Tamper Resistant Gamp; Tamper/Weather Resistant
- Self-Testing
- Green LED Indicator Light
- Ultra-Compact Design

CAT. NO.	TYPE	COLOR	OUTLET TYPE	BOX QTY
15A				
GFI-15TR-W	TAMPER RESISTANT	WHITE	5-15R	10
GFI-15TR-A	TAMPER RESISTANT	ALMOND	5-15R	10
GFI-15TR-I	TAMPER RESISTANT	IVORY	5-15R	10
GFI-15TWR-W	TAMPER AND WEATHER RESISTANT	WHITE	5-15R	10
20A				
GFI-20TR-W	TAMPER RESISTANT	WHITE	5-20R	10
GFI-20TR-A	TAMPER RESISTANT	ALMOND	5-20R	10
GFI-20TR-I	TAMPER RESISTANT	IVORY	5-20R	10
GFI-20TWR-W	TAMPER AND WEATHER RESISTANT	WHITE	5-20R	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

TITAN MAX[®]

Auxiliary Contact Blocks with Quick Connect



CAT. NO.	TYPE	CASE QTY
TMXINC	SPST NC	100
TMXINO	SPST NO	100
TMX2NO	DPST NO	100
TMXINC-INO	DPST INC + INO	100

Auxiliary Contacts



CAT. NO.	TYPE	ORDER MULTIPLE
TMX7590NC	NORMALLY CLOSED	
TMX7590NO	NORMALLY OPEN	

Microswitch Blocks



CAT. NO.	TYPE	ORDER MULTIPLE
TMXSPDT1	SPDT AT LEFT POSITION	
TMXSPDT2	SPDT AT RIGHT POSITION	
TMX2SPDT	DPDT	

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

Definite Purpose Contactors One Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C130A	30	24	50
C130B	30	120	50
C130C	30	208/240	50
C140A	40	24	50
C140B	40	120	50
C140C	40	208/240	50

Definite Purpose Contactors Three Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C325B	25	120	25
C330A	30	24	25
C330B	30	120	25
C330C	30	208/240	25
C330E	30	277	25
C340A	40	24	25
C340B	40	120	25
C340C	40	208/240	25
C340E	40	277	25
C350A	50	24	24
C350B	50	120	24
C350C	50	208/240	24
C360A	60	24	24
C360B	60	120	24
C360C	60	208/240	24
C375A	75	24	12
C375B	75	120	12
C375C	75	208/240	12
C390A	90	24	12
C390B	90	120	12
C390C	90	208/240	12

Definite Purpose Contactors Two Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C220A	20	24	50
C220B	20	120	50
C220C	20	208/240	50
C225A	25	24	50
C225B	25	120	50
C225C	25	208/240	50
C230A	30	24	50
C230B	30	120	50
C230C	30	208/240	50
C240A	40	24	50
C240B	40	120	50
C240C	40	208/240	50

Definite Purpose Contactors Four Pole



- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Includes Lugs, Spade Terminals, and Covers
- Meets The ARI 780/790 Standard

CAT. NO.	FL AMPS	COIL VAC	CASE QTY
C430A	30	24	25
C430B	30	120	25
C430C	30	208/240	25
C440A	40	24	25
C440B	40	120	25
C440C	40	208/240	25

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

TITAN MAX[®]

Definite Purpose Contactors One Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX130A2	30	24	50
TMX130B2	30	120	50
TMX130C2	30	208/240	50
TMX140A2	40	24	50
TMX140B2	40	120	50
TMX140C2	40	208/240	50

Definite Purpose Contactors Three Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX330A2	30	24	25
TMX330B2	30	120	24
TMX330C2	30	208/240	25
TMX340A2	40	24	25
TMX340B2	40	120	25
TMX340C2	40	208/240	25
TMX350A2	50	24	24
TMX350B2	50	120	24
TMX350C2	50	208/240	24
TMX360A2	60	24	24
TMX360B2	60	120	24
TMX360C2	60	208/240	25
TMX375A2	75	24	25
TMX375B2	75	120	25
TMX375C2	75	208/240	12
TMX390A2	90	24	12
TMX390B2	90	120	12
TMX390C2	90	208/240	12

Definite Purpose Contactors Two Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX225A2	25	24	50
TMX225B2	25	120	50
TMX225C2	25	208/240	50
TMX230A2	30	24	50
TMX230B2	30	120	50
TMX230C2	30	208/240	50
TMX240A2	40	24	50
TMX240B2	40	120	50
TMX240C2	40	208/240	50

Definite Purpose Contactors Four Pole

- Long Electrical Life; Tested to 250,000 Cycles
- Universal Metal Mounting Plate
- 50/60 Hertz
- Meets The ARI 780/790 Standard



CAT. NO.	FL AMPS	COIL VAC	CASE QTY
TMX430A2	30	24	25
TMX430B2	30	120	25
TMX430C2	30	208/240	25
TMX440A2	40	24	25
TMX440B2	40	120	25
TMX440C2	40	208/240	25

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech[®] products please visit www.diversitech.com

HEAVY DUTY Relays



- 1/4" Quick Connect Terminals
- Quiet & reliable operations
- Used for Solenoids, Fan Motors, & other applications



CAT. NO.	DESCRIPTION	AMPS	125 VOLTS	250 VOLTS	COIL VOLTAGE	CASE QTY
PR360	SPST-NO	18	12/60	8/48	24 VAC	150
PR362	SPST-NO	18	12/60	8/48	120 VAC	150
PR370	SPDT	18	12/60	8/48	24 VAC	150
PR372	SPDT	18	12/60	8/48	120 VAC	150
PR374	SPDT	18	12/60	8/48	240 VAC	150
PR380	SPST NO + NC	18	12/60	8/48	24 VAC	150
PR382	SPST NO + NC	18	12/60	8/48	120 VAC	150
PR384	SPST NO + NC	18	12/60	8/48	240 VAC	150

General Purpose Relays



- SPST & SPDT Fan Relays
- 1/4" Quick Connect Terminals
- Quiet & reliable operations



CAT. NO.	DESCRIPTION	COIL VOLTAGE	AMPS	FLA/LRA@125V	FLA/LRA@250V	ORDER MULTIPLE
PR290Q	SPST-NO	24 VAC	16	-	8/25	1
PR291Q	SPST-NO	120 VAC	16	-	8/25	1
PR292Q	SPST-NO	240 VAC	16	-	8/25	1
PR293Q	SPDT	24 VAC	16	-	8/25	1
PR294Q	SPDT	120 VAC	16	-	8/25	1
PR295Q	SPDT	240 VAC	16	-	8/25	1

General Purpose Switching Relays



- Switching Relays
- 1/4" Quick Connect Terminals
- Quiet & reliable operations



CAT. NO.	COIL VOLTAGE	DESCRIPTION	TERMINALS 1-2-3	TERMINALS 4-5-6	CASE QTY
PR340	24	DPDT	POWER	POWER	100
PR341	110/120	DPDT	POWER	POWER	100
PR342	208/240	DPDT	POWER	POWER	100

Potential Relays

TITAN ICE™



- Applications:
 - Central air conditioner compressors
 - Submersible pump motors
 - Motors generally over 1/3 HP with start capacitors
- Universal replacements for thousands of GE 3ARR3 model relays and many other OEM's
- Proven performance for 40 years
- Contact rating: 35 amps max, break only
- Endurance up to 500,000 operations depending on load
- Screw type terminals #8-32 thread
- Six (6) quick connect terminals and screws included with each relay
- Quiet & reliable operations

CAT. NO.	INDUSTRY #	CONTINUOUS COIL VOLTAGE	PICK UP MINIMUM	PICK UP MAXIMUM	DROP-OUT MAXIMUM
TR68	19007	500V	322V	348V	138V
TR551	19551	332V	243V	271V	91V

Class II Transformers



Packard transformers replace models with equal or lower VA rating



CAT. NO.	PRIMARY VOLTAGE	VA RATING	SECONDARY RATING	MOUNTING TYPE	TERMINAL TYPE	DIRECT REPLACEMENT FOR	CASE QTY
PF42420	120/208/240	20	24	FOOT	WIRE LEAD	JARD 2031F UET 114	30
PMI2040	120	40	24	PLATE	WIRE LEAD/TERM	UNIVERSAL REPLACEMENT	18
PF12440	120	40	24	FOOT	WIRE LEAD	JARD 4011F	30
PF32440	120/208/240	40	24/12/2.5	FOOT	WIRE LEAD	JARD 4032F UET 101	30
PF40310EM	120/208/240	40	24	FOOT	TERMINALS	JARD 40310EM RHEEM 46-101905-01	18
PF22440	208/240	40	24	FOOT	WIRE LEAD	JARD 4021F	30
PF27440	277	40	24	FOOT	WIRE LEAD	JARD 40271F	30
PM43448	120/208/240	48	24/12/2.5	MULTI	WIRE LEAD	UNIVERSAL REPLACEMENT	18
PF12450	120	50	24	FOOT	WIRE LEAD	RHEEM 46-102856-02	30
PF42450	120/208/240/480	50	24	FOOT	WIRE LEAD	JARD 5041C	12
PF52475	120/208/240/480	75	24	FOOT	WIRE LEAD	JARD 7541C UET 179R	12
PM10048P	208/240/480	100	24/120	MULTI	WIRE LEAD	JARD 10048P	12

Sequencers

- Full-load rated auxiliary contacts
- Standard operating ambient between -50°F (-45.5°C) and 165°F (73.8°C)
- Shock and vibration resistant
- Solid state
- Quick-connect terminals
- Mounts in any position



CAT. NO.	NO. OF TIMINGS	NO. OF SWITCHES	SWITCH CONFIG. (NORMALLY OPEN)	DELAY ON TIME	DELAY OFF TIME	ORDER MULTIPLE
HS24A341	1	1	SPST	1-20	40-110	1
HS24A342	1	1	SPST	30-90	1-30	1
HS24A343	1	2	DPST	1-20, 1-20	40-110, 40-110	1
HS24A344	1	2	DPST	30-90, 30-90	1-30, 1-30	1
HS24A345	2	3	DPST-SPST	1-110, 1-110, 1-110	1-110, 1-110, 1-110	1
HS24A346	2	4	2-DPDT	1-110 * 4	1-110 * 4	1
HS24A3414	4	5	2-DPDT-SPST	1-160 * 5	1-160 * 5	1

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Adjustable Delay on Break Timer



- Universal voltage operation
- Higher 1.5 amp power rating
- Simple 2-wire hookup
- Knob-adjustable time delays

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
ICM206	ADJUSTABLE DELAY ON BREAK	1

Adjustable Delay on Make Timer



ICM102F



ICM102

- Universal voltage operation
- Higher 1.5 amp power rating
- Simple 2-wire hookup
- Knob-adjustable time delays

CAT. NO.	DESCRIPTION	CASE QTY
ICM102	ADJUSTABLE DELAY ON MAKE	10
ICM102F	ADJUSTABLE DELAY ON MAKE W/WIRE LEADS	10

DITEK Kool Guard Voltage Monitoring/Surge Protection



DTK-KG2 Kool Guard Series Intelligent Voltage Monitoring is specifically designed to protect HVAC equipment from harmful undervoltage and overvoltage events that can damage sensitive electronics and mechanical components within the system. The DTK-KG2 also incorporates DITEK's state-of-the-art surge protection design to shield the equipment from damaging transient voltage surges and spikes. The standard UL Type 4X polycarbonate enclosure allows the unit to be easily installed in harsh outdoor environments.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
DTK-KG2	KOOL GUARD VOLTAGE MONITORING	1

DITEK Whole Home Surge Protection



DITEK's DTK-120/240HD is designed to protect 120/240V split phase AC power systems. This device incorporates individually fused components for maximum performance and protection in the most demanding environments. Its compact size makes it an excellent choice for residential electrical panel protection.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
DTK-120-240HD	DITEK WHOLE HOME SERIES SURGE PROTECTOR	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

3 Phase Surge Protectors

DITEK's CMXPLUS Series of durable, cost-effective surge protective devices are ideal for a variety of industrial equipment.

- Universal voltage operation
- 75,000 Amp Total Surge Current Rating
- Diagnostic LED indicates system power and SPD function
- Automatically resets to handle multiple surge events



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
DTK-2403CMXPLUS	240V	
DTK-4803CMXPLUS	480V DITEK WHOLE HOME SERIES SURGE PROTECTOR	
DTK-6003CMXPLUS	600V	

Circuit Breaker Surge Protector

Ditek DTK-120/240BKI Circuit Breaker Surge Protective Device. Designed to fit a variety of residential load centers with 1" breaker spacing. This SPD is specifically designed for 120/240V split phase systems and incorporates the latest thermally-protected MOV technology.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
DTK-120-240BKI	240V	

Single Phase Surge Protectors

The Packard PSP72KA Surge Protective Device provides durable, cost-effective protection and is suitable for use in a variety of locations. This compact, parallel-mount SPD is suitable for 120/240V systems, and is an excellent choice for effective, performance driven surge protection.



CAT. NO.	SERVICE WIRING	SURGE CURRENT RATING	MCOV	UL 1449, 3RD ED. V.P.R.	SHORT CIRCUIT CURRENT RATING	UL1449, 3RD ED. IN RATING	DIRECT REPLACEMENT FOR
PSP72KA	SPLIT ϕ (2W + G), 120/240VAC	50,000A	150/320V	700V L-G, 1,200V L-L	10,000A	10,000A	SMC60 SMCI50

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

175 Piece Terminal Kit With Crimp Tool



- High impact reusable plastic box
- 22 - 10 AWG Crimp Tool
- Assortment of ring and spade terminals, butt connectors, male and female disconnects

CAT NO.	KITS/CASE
10815	5

CONTAINS THE FOLLOWING:

QTY	CAT. NO.	ITEM DESCRIPTION
4	10014	RING TERMINAL 22 - 16 #8
4	10034	RING TERMINAL 16 - 14 #8
5	10036	RING TERMINAL 16 - 14 #10
4	10062	RING TERMINAL 12 - 10 #8
6	10064	RING TERMINAL 12 - 10 #10
4	10066	RING TERMINAL 12 - 10 1/4"
4	10112	SPADE TERMINAL 22 - 16 #6
4	10114	SPADE TERMINAL 22 - 16 #8
4	10116	SPADE TERMINAL 22 - 16 #10
4	10132	SPADE TERMINAL 16 - 14 #6
7	10134	SPADE TERMINAL 16 - 14 #8
6	10136	SPADE TERMINAL 16 - 14 #10
8	10162	SPADE TERMINAL 12 - 10 #8
15	10164	SPADE TERMINAL 12 - 10 #10
4	10166	SPADE TERMINAL 12 - 10 1/4"

QTY	CAT. NO.	ITEM DESCRIPTION
10	10182	BUTT CONNECTOR 22 - 18
10	10184	BUTT CONNECTOR 16 - 14
8	10186	BUTT CONNECTOR 12 - 10
4	10214	VINYL MALE DISCONNECT 22 - 16 0.25"
4	10224	VINYL MALE DISCONNECT 16 - 14 0.25"
4	10232	VINYL MALE DISCONNECT 12 - 10 0.25"
5	10314	VINYL FEM DISCONNECT 22 - 18 0.25"
4	10322	VINYL FEM DISCONNECT 16 - 14 0.187"
10	10324	VINYL FEM DISCONNECT 16 - 14 0.25"
12	10332	VINYL FEM DISCONNECT 12 - 10 0.25"
4	10411	NYL FULL INS FEM DISCON 22 - 18 0.25"
5	10412	NYL FULL INS FEM DISCON 16 - 14 0.25"
4	10414	NYL FULL INS FEM DISCON 12 - 10 0.25"
4	10415	NYL FULL INS MALE DISCON 22 - 18 0.25"
4	10416	NYL FULL INS MALE DISCON 16 - 14 0.25"

200 Piece Terminal Kit with Controlled Cycle Crimp Tool



- High impact steel tray
- Ergonomic controlled cycle crimp tool
- Assortment of ring and spade terminals, butt connectors, male and female disconnects

CAT NO.	KITS/CASE
10817	5

CONTAINS THE FOLLOWING:

QTY	CAT. NO.	ITEM DESCRIPTION
4	10012	RING TERMINAL 22 - 16 #6
4	10014	RING TERMINAL 22 - 16 #8
4	10016	RING TERMINAL 22 - 16 #10
4	10032	RING TERMINAL 16 - 14 #6
4	10034	RING TERMINAL 16 - 14 #8
5	10036	RING TERMINAL 16 - 14 #10
4	10062	RING TERMINAL 12 - 10 #8
6	10064	RING TERMINAL 12 - 10 #10
4	10066	RING TERMINAL 12 - 10 1/4"
4	10068	RING TERMINAL 12 - 10 5/16"
4	10112	SPADE TERMINAL 22 - 16 #6
4	10114	SPADE TERMINAL 22 - 16 #8
4	10116	SPADE TERMINAL 22 - 16 #10
4	10132	SPADE TERMINAL 16 - 14 #6
8	10134	SPADE TERMINAL 16 - 14 #8
7	10136	SPADE TERMINAL 16 - 14 #10
9	10162	SPADE TERMINAL 12 - 10 #8

QTY	CAT. NO.	ITEM DESCRIPTION
16	10164	SPADE TERMINAL 12 - 10 #10
4	10166	SPADE TERMINAL 12 - 10 1/4"
11	10182	BUTT CONNECTOR 22 - 18
11	10184	BUTT CONNECTOR 16 - 14
9	10186	BUTT CONNECTOR 12 - 10
4	10214	VINYL MALE DISCONNECT 22 - 16 0.25"
4	10224	VINYL MALE DISCONNECT 16 - 14 0.25"
4	10232	VINYL MALE DISCONNECT 12 - 10 0.25"
5	10314	VINYL FEM DISCONNECT 22 - 18 0.25"
4	10322	VINYL FEM DISCONNECT 16 - 14 0.187"
11	10324	VINYL FEM DISCONNECT 16 - 14 0.250"
13	10332	VINYL FEM DISCONNECT 12 - 10 0.250"
4	10411	NYL FULL INS FEM DISCON 22 - 18 0.250"
5	10412	NYL FULL INS FEM DISCON 16 - 14 0.250"
4	10414	NYL FULL INS FEM DISCON 12 - 10 0.250"
4	10415	NYL FULL INS MALE DISCON 22 - 18 0.250"
4	10416	NYL FULL INS MALE DISCON 16 - 14 0.250"

500 Piece Terminal Kit with Controlled Cycle Crimp Tool




- High impact steel tray
- Ergonomic controlled cycle crimp tool
- Assortment of ring and spade terminals, butt connectors, male and female disconnects

CAT NO.	KITS/CASE
10818	5

CONTAINS THE FOLLOWING:

QTY	CAT. NO.	ITEM DESCRIPTION
8	10012	RING TERMINAL 22 - 16 #6
10	10014	RING TERMINAL 22 - 16 #8
8	10016	RING TERMINAL 22 - 16 #10
8	10032	RING TERMINAL 16 - 14 #6
10	10034	RING TERMINAL 16 - 14 #8
14	10036	RING TERMINAL 16 - 14 #10
10	10062	RING TERMINAL 12 - 10 #8
16	10064	RING TERMINAL 12 - 10 #10
10	10066	RING TERMINAL 12 - 10 1/4"
8	10068	RING TERMINAL 12 - 10 5/16"
10	10112	SPADE TERMINAL 22 - 16 #6
10	10114	SPADE TERMINAL 22 - 16 #8
10	10116	SPADE TERMINAL 22 - 16 #10
10	10132	SPADE TERMINAL 16 - 14 #6
21	10134	SPADE TERMINAL 16 - 14 #8
18	10136	SPADE TERMINAL 16 - 14 #10
23	10162	SPADE TERMINAL 12 - 10 #8


QTY	CAT. NO.	ITEM DESCRIPTION
40	10164	SPADE TERMINAL 12 - 10 #10
8	10166	SPADE TERMINAL 12 - 10 1/4"
28	10182	BUTT CONNECTOR 22 - 18
30	10184	BUTT CONNECTOR 16 - 14
23	10186	BUTT CONNECTOR 12 - 10
8	10214	VINYL MALE DISCONNECT 22 - 16 0.25"
10	10224	VINYL MALE DISCONNECT 16 - 14 0.25"
10	10232	VINYL MALE DISCONNECT 12 - 10 0.25"
14	10314	VINYL FEM DISCONNECT 22 - 18 0.25"
10	10322	VINYL FEM DISCONNECT 16 - 14 0.187"
28	10324	VINYL FEM DISCONNECT 16 - 14 0.25"
35	10332	VINYL FEM DISCONNECT 12 - 10 0.25"
10	10411	NYL FULL INS FEM DISCON 22 - 18 0.25"
14	10412	NYL FULL INS FEM DISCON 16 - 14 0.25"
10	10414	NYL FULL INS FEM DISCON 12 - 10 0.25"
8	10415	NYL FULL INS MALE DISCON 22 - 18 0.25"
10	10416	NYL FULL INS MALE DISCON 16 - 14 0.25"



Screw-On Wire Connectors



CAT. NO.	COLOR	WIRE COMBINATIONS	MAX VOLTS	DIMENSIONS					BOX/BAG QTY	CASE QTY
				A	B	C	D	E		
23071	GRAY	MAX: 1 #14 & 1 #20 MIN: 2 #22	300V	0.150"	0.264"	0.339"	0.228"	0.598"	100	15,000
23072	BLUE	MAX: 3 #16 MIN: 2 #22	300V	0.161"	0.276"	0.386"	0.232"	0.693"	100	15,000
23073	ORANGE	MAX: 4 #16 & 1 #20 MIN: 1 #18 & 1 #22	600V	0.197"	0.390"	0.480"	0.307"	0.862"	100	10,000
23074	YELLOW	MAX: 1 #18 & 4 #14 MIN: 1 #18 & 1 #14	600V	0.236"	0.441"	0.551"	0.311"	0.937"	100	6,000
23076	RED	MAX: 3 #14 & 4 #16 MIN: 1 #10 & 1 #20	600V 1000V FIXTURES & SIGNS	0.276"	0.504"	0.630"	0.350"	1.047"	100	3600



Wing Connectors



CAT. NO.	COLOR	WIRE COMBINATIONS	DIMENSIONS					BOX QTY	CASE QTY
			A	B	C	D	E		
23084	YELLOW	MAX: 4 #16 & 2 #18 MIN: 2 #18	0.252"	0.386"	0.717"	0.354"	1.016"	100	10,000
23085	TAN	MAX: 3 #12 & 3 #18 MIN: 2 #18	0.283"	0.457"	0.72"	0.362"	1.142"	100	10,000
23086	RED	MAX: 2 #12 & 4 #14 MIN: 1 #16 & 1 #14	0.354"	0.531"	0.906"	0.378"	1.252"	100	8,000
23088	GRAY	MAX: 3 #10 MIN: 3 #14 & 1 #18	0.394"	0.587"	1.00"	0.394"	1.311"	50	5,000
23090	BLUE	MAX: 1 #8 & 3 #10 MIN: 2 #10 & 1 #12	0.472"	0.74"	1.26"	0.516"	1.575"	50	4,000



Combo Handy Pack Wire & Winged Connectors

Different sizes of connectors in a Handy Pack

23512 Contains the following:

QTY	PRODUCT NUMBER	DESCRIPTION
90 CONNECTORS	23073	ORANGE WIRE CONNECTOR
60 CONNECTORS	23074	YELLOW WIRE CONNECTOR
40 CONNECTORS	23076	RED WIRE CONNECTOR
40 CONNECTORS	23085	TAN TWISTED WING CONNECTOR



CAT. NO.	HANDY PACKS PER CASE
23512	16

23514 Contains the following:

QTY	PRODUCT NUMBER	DESCRIPTION
90 CONNECTORS	23073	ORANGE WIRE CONNECTOR
50 CONNECTORS	23084	YELLOW TWISTED WING CONNECTOR
40 CONNECTORS	23085	TAN TWISTED WING CONNECTOR
30 CONNECTORS	23086	RED TWISTED WING CONNECTOR

CAT. NO.	HANDY PACKS PER CASE
23514	16

Images and Specifications may not be representative of all products listed. For more information on The Morris Products Line visit: www.morrisproducts.com

Staples



- Non-Insulated
- Made of Steel
- Used for Armored & NM Cable
- Sharp Tips

CAT. NO.	CABLE RANGE & TYPES	DIMENSIONS		BOX QTY	CASE QTY
		W	D		
19556	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	100	2,520
19555	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	500	800
19554	14-2, 12-2 NM & BX CABLE	1/2"	1-1/16"	-	5,000/PAIL
19553	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	100	1,800
19552	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	500	400
19551	14-3, 12-3, 10-3 NM & BX CABLE	9/16"	1-1/8"	-	5,000/PAIL

High Temperature Wire 400°F (204°C), 600V



- 7 strand tin coated copper wire
- Silicone rubber insulation
- Braided fiberglass jacket
- Use on the front of all gas furnaces with spark ignition
- Used on all heat producing food preparation equipment



CAT. NO.	DESCRIPTION	CASE QTY
WHTB10-50	10 GAUGE, BLACK, 50'	1
WHTB12-50	12 GAUGE, BLACK, 50'	1
WHTB14-50	14 GAUGE, BLACK, 50'	1
WHTR14-50	14 GAUGE, RED, 50'	1
WHTW14-50	14 GAUGE, WHITE, 50'	1

Thermostat Wire

- Class 2 thermostat wire for indoor wiring
- Soft drawn bare copper wire
- Semi rigid PVC insulation
- PVC overall jacket
- Packaged on aluminum spool



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
620-18-2	18 AWG, 2 CONDUCTORS - 500' SPOOL	1
620-18-3	18 AWG, 3 CONDUCTORS - 500' SPOOL	4
620-18-4	18 AWG, 4 CONDUCTORS - 250' SPOOL	1
620-18-5	18 AWG, 5 CONDUCTORS - 250' SPOOL	4
620-18-6	18 AWG, 6 CONDUCTORS - 250' SPOOL	1
620-18-7	18 AWG 7 CONDUCTORS - 250' SPOOL	4
620-18-8	18 AWG 8 CONDUCTORS - 250' SPOOL	4
620-18-10	18 AWG 10 CONDUCTORS - 250' SPOOL	1
620-20-3	20 AWG 3 CONDUCTORS - 500' SPOOL	4
620-20-8	20 AWG 8 CONDUCTORS - 250' SPOOL	4

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Standard PTC Relay and Hard Start Capacitors

- Wired with "Piggy-Back" terminals for easy installation on run capacitors
- Designed for 115 volt thru 277 volt systems
- Mounts easily with either screw or clip
- Increases compressor starting torque for faster recycling
- For all permanent split capacitor, single phase air conditioning and heat pump systems



CAT. NO.	OPERATING VOLTAGE (VAC)	RECOMMENDED RANGE	INCREASE IN TORQUE %	CASE QTY
TQS5	115-277	1/2HP TO 10HP	300%	20
TQS6	115-277	1/2HP TO 10HP	500%	25
TQS8	115-277	1/2HP TO 10HP	600%	25

TorQstart 3-N-1 Kit

- Combination relay, overload, and capacitor
- Pre-wired for easy installation
- Extra-long compressor leads for mounting flexibility
- All models adapt to 115-volt compressors with external overload protector



CAT. NO.	COMPRESSOR SIZES	VOLTS	ORDER MULTIPLE
TQS21	1/2HP	115	1
TQS41	1/4HP AND 1/3HP	115	1
TQS81	1/12HP THRU 1/5HP	115	1

SoftStartHome Soft Starts

The SoftStartHome SSH6T soft start is designed for residential AC systems up to 6 tons. Soft starts ramp up power to reduce inrush of current to components and reduce power demand on start up. This reduces the stress on components and can allow systems to be supported by backup power.

- Reduces startup power demand by up to 70%
- Quiet AC Startup
- Compatible with 115-240VAC systems



CAT. NO.	DESCRIPTION	MAXIMUM SURGE	WORKING CURRENT	CASE QTY
SSH3T	SOFT STARTER FOR 3-TON A/C UNIT	120 AMPS	18 AMPS	10
SSH6T	SOFT STARTER FOR 6-TON A/C UNIT	130 AMPS	42 AMPS	10

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Emergency Metal Switch Plates



UTILITY



1 GANG



EMERGENCY

- Red with silk screened white letters

CAT. NO.	TYPE	BOX QTY	CASE QTY
UTILITY			
83490	OIL	25	100
83495	GAS	25	100
83500	EMERGENCY	25	100
1 GANG			
83491	OIL	25	100
83496	GAS	25	100
83501	EMERGENCY	25	100
4" RAISED			
83492	OIL	50	100
83503	GAS	50	100
83502	EMERGENCY	50	100

Single Gang Weatherproof Boxes



36090



36090



37130

CAT. NO.	CUBIC INCH CAPACITY	NO. OF OUTLET HOLES	OUTLET HOLE DIA.	NO. OF CLOSURE PLUGS	DIMENSIONS			FINISH	BOX QTY
					L	W	D		
36090	18.3	3	1/2"	2	4-1/2"	2-3/4"	2"	GRAY	40
36030	23.8	4	1/2"	2	4-1/2"	2-3/4"	2-5/8"	GRAY	50
ONE GANG WEATHERPROOF COVER									
37130								GRAY	50

Two Gang Weatherproof Boxes



36290



37250

CAT. NO.	CUBIC INCH CAPACITY	NO. OF OUTLET HOLES	OUTLET HOLE DIA.	NO. OF CLOSURE PLUGS	DIMENSIONS			FINISH	BOX QTY
					L	W	D		
TWO GANG WEATHERPROOF BOX									
36290	30.5	6	1/2"	2	4-1/2"	4-1/2"	2-3/16"	GRAY	40
TWO GANG WEATHERPROOF COVER									
37250	-	-	-	-	-	-	-	GRAY	50



Heavy Duty Toggle Switches - 3 Pole

- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F



70301



70303

CAT. NO.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTORLOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70301	3PST	ON-OFF	SCREW	6	18A 125VAC 10A 250VAC	18A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.32" X 1.09" X 1.11"	1	10
70303	3PDT	ON-OFF-ON	SCREW	9	18A 125VAC 10A 250VAC	18A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.32" X 1.09" X 1.11"	1	10



Heavy Duty Toggle Switches - 4 Pole



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTORLOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70304	1	4PST	ON-OFF	SCREW	8	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.43" X 1.40" X 1.07"	1	10
70305	2	4PDT	ON-ON	SCREW	12	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.43" X 1.40" X 1.07"	1	10
70306	3	4PDT	ON-OFF-ON	SCREW	12	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.43" X 1.40" X 1.07"	1	10



Medium Duty Toggle Switches

- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Insulation Resistance: 500V



FIG. 1



FIG. 2



FIG. 3



FIG. 4

CAT. NO.	FIG.	TYPE	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70050	1	TOGGLE WITH ON/OFF FACEPLATE WIRE LEAD	SPST	ON-OFF	6" WIRE LEADS	N/A	8A 125VAC 4A 250VAC 1/3HP 125V	0.98" X 0.62" X 0.62"	1	10
70060	2	TOGGLE WITH ON/OFF FACEPLATE	SPST	ON-OFF	SCREWS	2	6A 125VAC 3A 240VAC	0.69" X 0.57" X 0.40"	1	10
70062	3	TOGGLE SWITCH	SPST	ON-OFF	QUICK CONNECT SPADE	1	21A 12VDC	0.69" X 0.55" X 0.45"	1	10
70061	4	SHORT BALL BAT TOGGLE SWITCH WITH ON/OFF PLATE	SPST	ON-OFF	6" WIRE LEADS	N/A	6A 125VAC 3A 250VAC	0.69" X 0.55" X 0.34"	1	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Heavy Duty Toggle Switches - 1 Pole



- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F



CAT. NO.	FIG.	TYPE	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
SINGLE POLE SINGLE THROW											
70070	1	TOGGLE SWITCH WITH ON/OFF PLATE	SPST	ON-OFF	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70071	2	TOGGLE SWITCH WITH ON/OFF PLATE	SPST	ON-OFF	QUICK CONNECT SPADE	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70072	3	TOGGLE SWITCH IP55 RATED WATERPROOF "O" RING ON/OFF PLATE	SPST	ON-OFF	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70073	4	TOGGLE SWITCH WITH ON/OFF PLATE & BOOT	SPST	ON-OFF	6" WIRE LEADS	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.18" X 0.68" X 0.75"	1	10
SINGLE POLE DOUBLE THROW											
70080	5	TOGGLE SWITCH	SPDT	ON-OFF-ON	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70081	6	TOGGLE SWITCH	SPDT	ON-OFF-ON	QUICK CONNECT SPADE	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70090	7	TOGGLE SWITCH	SPDT	ON-ON	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10
70091	8	TOGGLE SWITCH	SPDT	ON-ON	QUICK CONNECT SPADE	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.67"	1	10

Heavy Duty Toggle Switches - 2 Pole



- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F



CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
DOUBLE POLE SINGLE THROW										
70100	1	DPST	ON-OFF	SCREW	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250V	1.30" X 0.76" X 0.80"	1	10
70101	2	DPST	ON-OFF	QUICK CONNECT SPADE	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250V	1.30" X 0.76" X 0.80"	1	10
DOUBLE POLE DOUBLE THROW										
70110	3	DPDT	ON-OFF-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
70111	4	DPDT	ON-OFF-ON	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
70130	5	DPDT	ON-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
70131	6	DPDT	ON-ON	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Non-Metallic Toggle Switches



- Double Insulated with Internal O-Ring for Moisture and Dust Resistance
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Insulation Resistance: 500V
- () = Momentary

CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70120	1	SPST	ON-OFF	SCREW	2	20A 125VAC 10A 277VAC	1.37" X 0.76" X 0.94"	1	10
70125	2	SPDT	MOMENTARY (ON)-OFF-(ON)	QUICK CONNECT SPADE	3	20A 125VAC 10A 277VAC	1.37" X 0.76" X 0.94"	1	10
70127	3	DPDT	MOMENTARY (ON)-OFF-(ON)	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	1.37" X 0.76" X 0.94"	1	10



Heavy Duty Momentary Contact Toggle Switches

- Motor Control & Tool Applications
- Solid Brass or Nickel Plated Bushings
- 1/2" Mounting Hole
- Dielectric Strength: 1500V
- Mechanical Life Cycles: 100,000
- 32°F to 185°F
- () = Momentary

CAT. NO.	FIG.	POLES	FUNCTION	TERMINAL TYPE	NO. OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
SINGLE POLE SINGLE THROW										
70250	1	SPST	MOMENTARY (ON)-OFF	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.57" X 0.61"	1	10
70252	1	SPST	MOMENTARY ON-(OFF)	SCREW	2	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.57" X 0.61"	1	10
DOUBLE POLE SINGLE THROW										
70260	2	DPST	MOMENTARY ON-(OFF)	SCREW	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2HP 125/250VAC	1.30" X 0.76" X 0.80"	1	10
70262	2	DPST	MOMENTARY (ON)-OFF	SCREW	4	20A 125VAC 10A 277VAC	20A 125VAC 10A 277VAC 1-1/2HP 125-250VAC	1.30" X 0.76" X 0.80"	1	10
SINGLE POLE DOUBLE THROW										
70270	3	SPDT	MOMENTARY ON-OFF-(ON)	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4HP 125-250VAC	1.13" X 0.63" X 0.70"	1	10
70280	3	SPDT	MOMENTARY (ON)-OFF-(ON)	SCREW	3	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 3/4 HP 125-250VAC	1.13" X 0.63" X 0.70"	1	10
DOUBLE POLE DOUBLE THROW										
70290	4	DPDT	(ON)-OFF-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.32" X 0.75" X 0.86"	1	10
70299	5	DPDT	MOMENTARY (ON)-OFF-(ON)	QUICK CONNECT SPADE	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.30" X 0.76" X 0.86"	1	10
70300	6	DPDT	MOMENTARY (ON)-OFF-(ON)	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.30" X 0.76" X 0.86"	1	10
70135	6	DPDT	MOMENTARY (ON)-ON	SCREW	6	20A 125VAC 10A 277VAC	20A 125VAC 10A 250VAC 1-1/2 HP 125-250VAC	1.30" X 0.76" X 0.86"	1	10



RUBBER COVER AND NUT For Toggle Switches

- Protects switches from moisture, dirt, salt & spray
- Built-in nut base
- Fits Standard Toggles



RUBBER COVER For Push Button Switches

- Clear Cover
- Protects switches from moisture, dirt, salt & spray
- Fits Standard Push Switch



Accessories

- TOGGLE SWITCH INDICATOR PLATE**
- Accessory to indicate On-Off
 - Fits Standard Toggle Switch

CAT. NO.	BAG QTY
70240	10
70241	100

CAT. NO.	BAG QTY
70243	10

CAT. NO.	BAG QTY
70246	100

Rocker Switches



- Nylon 6/6 Frame & Actuator
- Contact Resistance: 50 milliohm
- Insulation Resistance: 100 milliohm
- Dielectric Strength: 1500V
- Insulation Resistance: 100 milliohm
- Operating Temp: -4°F to 185°F
- () = Momentary

CAT. NO.	FIG.	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO OF TERMINALS	STANDARD LOAD RATING	MOTOR LOAD RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
ROCKER SWITCH											
70171	1	ON-OFF	BLACK	SPST	QUICK CONNECT SPADE	2	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70172	1	ON-OFF	BLACK	DPST	QUICK CONNECT SPADE	4	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70173	1	ON-OFF-ON	BLACK	SPDT	QUICK CONNECT SPADE	3	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70174	1	ON-OFF-ON	BLACK	DPDT	QUICK CONNECT SPADE	6	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70175	1	(ON)-OFF-(ON)	BLACK	DPDT	QUICK CONNECT SPADE	6	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
LIGHTED ROCKER SWITCH											
70176	2	ON-OFF	BLACK/ RED LIGHT	DPST	QUICK CONNECT SPADE	4	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
70177	3	ON-OFF	BLACK/ AMBER LIGHT	DPST	QUICK CONNECT SPADE	4	20A 125VAC 10A 250VAC 21A 14VDC	16A 125VAC 10A 277VAC 3/4 HP	1.82" X 0.98" X 1.11"	1	10
APPLIANCE ROCKER SWITCH											
70180	4	ON-OFF	BLACK	SPST	QUICK CONNECT SPADE	2	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
70181	5	ON-OFF-ON PRINTED DOT	BLACK	SPDT	QUICK CONNECT SPADE	3	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
70182	6	ON-ON	BLACK	SPDT	QUICK CONNECT SPADE	3	20A 125VAC 16A 250VAC	20A 125VAC 16A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
LIGHTED APPLIANCE ROCKER SWITCH											
70190	7	ON-OFF	RED	SPST	QUICK CONNECT SPADE	3	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
DUAL COLOR ROCKER SWITCH											
70191	8	ON-OFF	RED/ BLACK	SPST	QUICK CONNECT SPADE	2	20A 125VAC 16A 250VAC	20A 125VAC 16A 250VAC 1/3HP 125VAC 1/2HP 250VAC	1.24" X 0.73" X 0.77"	1	10
MINIATURE LIGHTED ROCKER SWITCH											
70192	9	ON-OFF	RED	SPST	QUICK CONNECT SPADE	3	16A 125VAC 10A 250VAC	16A 125VAC 10A 250VAC 1/3HP 125VAC 1/2HP 250VAC	0.83" X 0.59" X 0.50"	1	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



- Rotary Canopy Type Switches
- Household Appliances, Fixtures & Lamps

Rotary Switches



CAT. NO.	FIG.	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO. OF TERMINALS	RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70220	1	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.97" X 0.8" X 0.37"	1	10
70222	2	ON-OFF	BLACK	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.96" X 0.79" X 0.36"	1	10
70230	3	OFF-ON(A)-ON(B)-ON(A+B)	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.86" X 1.03" X 0.34"	1	10
70422	4	ON-OFF	BLACK	SPST	6" LEADS	N/A	3 AMPS 125VAC 1.5 AMPS 250VAC	0.60" DIA X 0.73" HT	1	10



- Momentary Contact
- Maintained Contact
- Appliances, Fixtures
- () = Momentary

Push Buttons



CAT. NO.	FIG.	TYPE	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO. OF TERMINALS	RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70140	1	MOMENTARY CONTACT PUSH	(ON)-OFF	BLACK	SPST	SCREW	2	6 AMPS 120VAC 3 AMPS 240VAC	0.88" X 0.54" X 0.35"	1	10
70150	2	MOMENTARY CONTACT PUSH	ON-(OFF)	RED	SPST	SCREW	2	3 AMPS 120VAC 1.5 AMPS 240VAC	0.88" X 0.54" X 0.35"	1	10
70160	3	MAINTAINED CONTACT PUSH	ON-OFF	BLACK PLASTIC	SPST	6" LEADS	N/A	8 AMPS 125VAC 4 AMPS 250VAC 1/3HP 125VAC	0.98" X 0.60" X 1.61"	1	10
70161	4	MAINTAINED CONTACT PUSH	ON-OFF	NICKEL	SPST	6" LEADS	N/A	8 AMPS 125VAC 4 AMPS 250VAC 1/3HP 125VAC	0.98" X 0.63" X 0.69"	1	10
70200	5	MAINTAINED CONTACT PUSH	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.97" X 0.80" X 0.36"	1	10
70210	6	MAINTAINED CONTACT PUSH	ON-OFF	NICKEL	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.97" X 0.80" X 0.36"	1	10
70165	7	MINIATURE PUSH BUTTON	ON-OFF	BLACK	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	0.73" X 0.54" X 0.93"	1	10



- Use for ceiling fixtures, lamps & fans
- Wire leads #18 AWG, 6" stripped wire
- Push-in connectors for #18 AWG wire
- 13/32" diameter mounting hole

Pull Chains



CAT. NO.	FIG.	FUNCTION	COLOR	POLES	TERMINAL TYPE	NO. OF TERMINALS	RATING	DIMENSIONS L" X W" X H"	BAG QTY	MASTER BAG
70010	1	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 0.825" X 0.625"	1	10
70011	1	ON-OFF	BRASS	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 0.825" X 0.625"	100	---
70020	1	ON-OFF	NICKEL	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 0.825" X 0.625"	1	10
70023	2	ALL ANGLE OFF-ON	NICKEL	SPST	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	2.52" X 1.50" X 0.50"	1	10
70045	3	2-SPEED OFF-ON-ON	BRASS	SPDT	PUSH IN	3	6 AMPS 125VAC 3 AMPS 250VAC	1.71" X 1.23" X 0.72"	1	10
70025	4	OFF-ON(A)-ON(B)-ON(A+B)	BRASS	SPTT	6" LEADS	N/A	6 AMPS 125VAC 3 AMPS 250VAC	1.25" X 1.00" X 0.625"	1	10
70040	5	OFF-ON(A)-ON(B)-ON(A+B)	BRASS	SPTT	PUSH IN	4	6 AMPS 125VAC 3 AMPS 250VAC	1.50" X 1.25" X 0.75"	1	10

Rectangular Indicator Pilot Lamp




- 250VAC Incandescent
- Insulation Resistance: 100 milliohm
- Dielectric Strength: 3000VAC
- Lamp Life Expectancy: > 10,000 Hrs
- -13°F to 185°F
- Nylon 6/6 Housing with Polycarbonate Lens
- Brass Terminals

CAT. NO.	COLOR	RATING	TERMINATION	BAG QTY
70310	GREEN	250VAC	SPADE	10
70311	RED	250VAC	SPADE	10
70312	AMBER	250VAC	SPADE	10

Round Indicator Pilot Lamp



INCANDESCENT



- Incandescent
- Insulation Resistance: 100 milliohm
- Dielectric Strength: 3000VAC
- Lamp Life Expectancy: > 10,000 Hrs
- -13°F to 185°F
- Nylon 6/6 Housing with Polycarbonate Lens
- Brass Terminals
- 0.47" Shaft Diameter

CAT. NO.	COLOR	RATING	TERMINATION	BAG QTY
70320	GREEN	250VAC	QUICK CONNECT	10
70321	RED	250VAC	QUICK CONNECT	10
70322	AMBER	250VAC	QUICK CONNECT	10
70325	AMBER	125VAC	6" WIRE LEADS	10
70326	GREEN	24VDC	6" WIRE LEADS	10
70327	RED	24VDC	6" WIRE LEADS	10
70328	AMBER	24VDC	6" WIRE LEADS	10

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Mini-Split Installation Tools Kit

hilmor®

The hilmor® HVAC/R Mini-Split Installation Tools Kit includes the tools you need to install a typical mini-split system. Tools to help you install with no sweat. Tools to help you flare connections without needing a third arm, setting proper torque with the digital adjustable torque wrench, hex key sets, the most useful 9 in 1 tool on the marketplace, and a manifold set with hoses to handle superheat and subcool calculations. All with the goal of helping you get in, get out and get on to the next install job.

INCLUDED WITH KIT:

ITEM	DESCRIPTION
A2L 1937685	ORBITAL FLARE KIT WITH TC AND DT
1839053	HVAC MULTI-TOOL 9 IN 1
1839048	HEX KEY FOLDING SET 5/16" TO 5/32"
1891472	HEX KEY FOLDING SET METRIC
1839080	BACKPACK BAG
1963826	DIGITAL ADJUSTABLE JAW TORQUE WRENCH KIT
A2L 1947967	VALVE CORE REMOVAL TOOL 1/4"
A2L MSA-3IF	MINI-SPLIT BRASS ADAPTOR
A2L 42I-CC	IMPERIAL BRASS 4-VALVE MANIFOLD



ITEM	DESCRIPTION	ORDER MULTIPLE
MSITK-DD	MINI-SPLIT INSTALLATION TOOLS KIT	1

Valve Core Removal Tool

hilmor®

Valve Core Removal Tools are designed to make work more efficient, but there's nothing efficient about losing tools or equipment. The hilmor® Valve Core Removal Tool has a built-in rare-earth magnet on the back of the plunger for convenient jobsite storage. After removing the core for evacuation or change-out, the plunger and valve core can be stored on the side of the unit. The tool comes in both 1/4" and 5/16" sizes.



TECHNICAL SPECIFICATIONS

CONNECTION SIZES	1/4" OR 5/16"
VACUUM LEVEL TESTED TO	20 MICRONS
MAX WORKING PRESSURE	800 PSI
BURST PRESSURE	4,000 PSI
OPERATING TEMPERATURE	-20° TO +180°F
VALVE TYPE	DOUBLE O-RING BALL VALVE

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1947967	1/4" VALVE CORE REMOVAL TOOL	1
1947968	5/16" VALVE CORE REMOVAL TOOL	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Compact Swage Tool Kit **hilmar**

TOOLS

Swage Tool Kit



CSCBFOAM

(All other products sold separately, case not included.)

The hilmar[®] Compact Swage Tool is taking swaging to the next level. It has the power to swage 2-1/8" tubing and the control to swage 1/4" tubing without a crack. With its small, pistol-shape design, it can fit in the smallest of spaces. This proprietary design can reduce on-the-job fatigue with its easy setup and one-handed operation made possible by an innovative hydraulic mechanism and release button. It's even equipped for multiple sizes.

TECHNICAL SPECIFICATIONS

TUBE MATERIALS	SOFT - COPPER, STEEL, ALUMINUM, BRASS
HEADS INCLUDED	3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8"
DEBURRING TOOL	PENCIL TYPE INCLUDED
CARRYING CASE	INCLUDED
OPTIONAL HEADS	1839023 1-3/8", 1839024 1-5/8", 1964043 2-1/8"

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1839015	COMPACT SWAGE TOOL KIT	1
CSCBFOAM	FOAM STORAGE TRAY	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

The hilmor® Orbital Flare was designed to produce quality flares – again and again. It has an off-center mounted cone that spins on an axis to make sure it uniformly shapes the tube. Plus, it's equipped with the kind of features you need – a spring-loaded block to firmly grip the tube, a tube-stop arrow for precise height and positioning (goodbye, nickel), and ball detents for easy flaring yoke alignment. It even has a clutch mechanism that stops the flaring when the job is done to eliminate cracking the tube.



TECHNICAL SPECIFICATIONS

TUBE MATERIALS	SOFT - COPPER, STEEL, ALUMINUM, BRASS
TUBING SIZES (O.D.)	3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"
FLARE TYPE	45°

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1838952	ORBITAL FLARE	1

Large Flare/Swage

The 1838948 single step flare with 45° angle and Tee handle style driver includes a wing nut die block and swage tool. Includes 4 different flare heads (3/4"; 5/8"; 7/8"; 1-1/8"). Can be used on soft - copper, steel, aluminum, brass.



TECHNICAL SPECIFICATIONS

TUBE MATERIALS	SOFT - COPPER, STEEL, ALUMINUM, BRASS
HEADS INCLUDED	3/4", 7/8", 1-1/8"
FLARE TYPE	45°

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1838948	LARGE FLARE/SWAGE	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Digital Adjustable Torque Wrench



The hilmar® Digital Adjustable Torque Wrench reduces the risk of refrigerant leaks from over or under tightening a flare nut on a mini-split. The digital screen for torque accuracy, 9 memory settings of common torque values, and light and sound indicators when desired torque is achieved, increases repeatability of proper torque time and time again.

TECHNICAL SPECIFICATIONS

JAW SIZE	1/4" TO 1-1/16"
JAW SIZE	5MM TO 30MM
ACCURACY	+/- 3%
MEASUREMENT INCREMENTS	0.1 (N-M, FT-LB)
TORQUE RANGE	5 - 95 (FT-LBS)
	60 - 1,195 (IN-LBS)
	69 - 1,378 (KG-CM)
OPERATION MODES	TRACK, PEAK
	MEMORY SETTINGS

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1963826	DIGITAL ADJUSTABLE TORQUE WRENCH	1

Reversible Magnetic Nut Drivers



hilmar® Reversible Magnetic Nut Drivers incorporate a high performance socket design that drives the fastener from the flats, not the corners, minimizing slip-page. It features a tapered socket design for improved access in tight spaces and uses a 1/4" magnetic hex shaft, where metal shavings and debris are easily wiped off. The socket quickly changes between 1/4" and 5/16" sizes, and is available in 3 standard lengths of 2-3/4", 4" and 6". The sockets are forged from 6150 Alloy Steel and hardened above 48 HRC for improved strength and durability making it the ultimate switchbit. Meets or exceeds ASME B107.110 Standards.

TECHNICAL SPECIFICATIONS

SOCKET SIZES	1/4" X 5/16"
SOCKET FORGINGS	6150 STEEL
SOCKET HARNDNESS	> HRC 48

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1937881	3-PACK 2-3/4" REVERSIBLE MAGNETIC NUT DRIVER	1
1937882	3-PACK 4" REVERSIBLE MAGNETIC NUT DRIVER	1
1937883	3-PACK 6" REVERSIBLE MAGNETIC NUT DRIVER	1
1937887	30-PACK 2-3/4" REVERSIBLE MAGNETIC NUT DRIVER	30
1937888	30-PACK 4" REVERSIBLE MAGNETIC NUT DRIVER	30
1937889	30-PACK 6" REVERSIBLE MAGNETIC NUT DRIVER	30

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Tube Cutters



This cutter can talk the talk without walking the walk. hilmor's® Large Diameter Tubing Cutters feature a four-roller tracking system to keep the tube from threading. All the while, a shock-resistant steel wheel cuts through the tube like a knife through butter.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1885384	TUBE CUTTER, 1/8 - 1-3/8IN	1
1885385	TUBE CUTTER, 1/8 - 1-3/4IN	1

Lineset Cleaner Kit hilmor®



**HLCFOAM
FOAM STORAGE TRAY**
(All other products sold separately, case not included.)



Foam Pigs

The hilmor® Lineset Cleaner uses a pressurized source to launch the carefully selected specialized foam puck into the lineset that effectively wipes the pipe clean of all contaminants and remaining refrigerants.

TECHNICAL SPECIFICATIONS

NOZZLE SIZES	3/8", 1/2", 5/8", 3/4", 7/8"
PRESSURE INLET	1/4" SAE MALE
MAX PSI	70
EXPANSION PACKS	HLN014 1/4" NOZZLE, 5 FOAM PIGS HLN118 1-1/18" NOZZLE, 5 FOAM PIGS

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
HLC007	LINESET CLEANER KIT	1
HLCFOAM	FOAM STORAGE TRAY	1
ACCESSORIES		
HLP038	10-PACK 3/8" FOAM PIGS	1
HLP012	10-PACK 1/2" FOAM PIGS	1
HLP058	10-PACK 5/8" FOAM PIGS	1
HLP034	10-PACK 3/4" FOAM PIGS	1
HLP078	10-PACK 7/8" FOAM PIGS	1
HLP099	10-PACK 2 OF EA. SIZE FOAM PIGS	1
HLP1450	50-PACK 1/4" FOAM PIGS	1
HLP3850	50-PACK 3/8" FOAM PIGS	1
HLP5850	50-PACK 5/8" FOAM PIGS	1
HLP3450	50-PACK 3/4" FOAM PIGS	1
HLP7850	50-PACK 7/8" FOAM PIGS	1

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Wireless Vacuum Gauge

hilmor®



Easy positioning. Easier readings that can withstand daily transportation and jobsite abuse. 80 hour battery life for Remote Sensor and Handheld. Measured with LED backlight turned off

TECHNICAL SPECIFICATIONS

ACCURACY	+/- 5% OF READING +/- 10 MICRONS
RESOLUTION	5 TO 2,000 MICRONS - 1 MICRON 2,001 TO 5,000 - 100 MICRONS 5,001 TO 10,000 - 250 MICRONS 10,001 TO ATM - 1,000 MICRONS
UNITS	MICRON, MTORR, TORR, MMHG, MBAR, KPA AND PA
WIRELESS RANGE	33' (10 METERS) UNOBSTRUCTED
OPERATING TEMPERATURE	-4°F TO 122°F (-20°C TO 50°C)
OPERATING HUMIDITY	UP TO 75% RELATIVE HUMIDITY
REFRESH RATE	0.5 SECONDS
BATTERY LIFE	80 HOURS (WITHOUT BACKLIGHT)

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1950217	WIRELESS VACUUM GAUGE	1

Compact Vacuum Gauge

hilmor®



The hilmor® Compact Vacuum Gauge is an all-in-one micron gauge that is durably constructed for everyday use and abuse. An easy to read backlit display provides readings and the two button operation simplifies field use.

TECHNICAL SPECIFICATIONS

ACCURACY	+/- 10% OF READING +/- 10 MICRONS
RESOLUTION	1 TO 2,000 MICRONS - 1 MICRON 2,001 TO 20,000 - 100 MICRONS 20,001 TO 100,000 - 1000 MICRONS 100,001 TO 300,000 - 10,000 MICRONS
OPERATING TEMP	10°F TO 122°F (-12°C TO 50°C)
OPERATING HUMIDITY	UP TO 75% RELATIVE HUMIDITY
REFRESH RATE	0.5 SECONDS
BATTERY LIFE	50 HOURS (WITHOUT BACKLIGHT)
PROTECTIVE CASE	INCLUDED

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CVG1200	COMPACT VACUUM GAUGE	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Battery Powered Vacuum Pump

hilmor[®]



The hilmor[®] BVP2CFM is designed and engineered to be A2L compliant and is powered by a rechargeable 18v 9Ah Lithium-Ion battery. Oil changes have never been easier; the front of the pump is sloped downwards, creating a natural path for oil to drain faster. This vacuum pump has been designed and retooled to make evacuation as easy as possible. Includes Pump, Battery, Charger and Charger Cords for the US, EU and AUS markets.

INCLUDED WITH PUMP

ITEM	DESCRIPTION
H18VB	BATTERY FOR HILMOR 18V 9AH LI-ION VACUUM PUMP
HBC18V	BATTERY CHARGER FOR HILMOR 18V 9AH LI-ION VACUUM PUMP
HBPVA-1	HILMOR BATTERY POWERED VACUUM PUMP BATTERY ADAPTER

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
BVP2CFM	BATTERY POWERED VACUUM PUMP	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech[®] products please visit www.diversitech.com

Compact Bender Kits



CSCBFOAM
FOAM STORAGE TRAY
 (All other products sold separately, case not included.)



Small in size. Big on advantages. The hilmor[®] Compact Bender will help you get the job done right from start to finish. Small-space capabilities, one-handed operation and precise bends – you get it all. A universal crossbar and color-coded mandrels provide simple setup and easy size identification. An advanced mandrel design and quick-release mechanism allow for an easy tube release. You can count on precise bends of 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8" tubing up to 90°. Includes storage case.

TECHNICAL SPECIFICATIONS

TUBE MATERIALS	SOFT - COPPER, STEEL, ALUMINUM, BRASS
MANDREL SIZES	1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8"
REVERSE BENDING ATTACHMENT	DELUXE MODEL ONLY
BENDING MECHANISM	RATCHETING
TUBE RELEASE TYPE	QUICK RELEASE TRIGGER
CARRYING CASE	INCLUDED

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1839032	COMPACT BENDER KIT	1
1926598	DELUXE COMPACT BENDER KIT	1
CSCBFOAM	FOAM STORAGE TRAY	1

EasyBend[®] Lineset Bender Kit



EasyBend[®] Lineset Bender Kit is the simplest way to bend copper lineset without even removing the insulation. The EasyBend[®] works on soft copper linesets 1/4", 3/8", 1/2" and 5/8". This internal pipe bending tool allows for kink-free bending.

TECHNICAL SPECIFICATIONS

TUBING TYPE	SOFT COPPER ONLY
SIZES INCLUDED	1/4", 3/8", 1/2", 5/8"
BENDER LENGTH	13'

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EB-1000	EASYBEND [®] LINESSET BENDER KIT	15

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

SPIN® Tools - The Original Flaring and Swaging Bits

The high-temperature, leakage-free **Flaring and Swaging** method, designed from the ground up for HVAC systems.



SPIN® Flaring and Swaging bits deliver the best flares and swages in seconds! Gives you consistent sizes on flares and swages, every time. Using an innovative technology, SPIN® tools are designed to quickly flare or swage virtually any copper or aluminum tube. Perfect for mini-splits and ductless A/C copper and aluminum tubes, it keeps the tubing thickness for high pressure refrigerant fluids such as R410A, R22, etc. Available in sets from 4 up to 6 pieces for HVAC/R applications; and 3 pieces for plumbing applications.

Swaging

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
INDIVIDUAL BITS		
S1014	1/4" SWAGING BIT	1
S1038	3/8" SWAGING BIT	1
S1012	1/2" SWAGING BIT	1
S1058	5/8" SWAGING BIT	1
S1034	3/4" SWAGING BIT	1
S1078	7/8" SWAGING BIT	1
SWAGING SETS		
S5000	5-PC SWAGING SET 1/4" - 3/4"	8
S6000	6-PC SWAGING SET 1/4" - 7/8"	8
P3000	3-PC PLUMBING SET 1/2", 3/4", 1"	50



Flaring

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
INDIVIDUAL BITS		
S1014	1/4" SWAGING BIT	1
S1038	3/8" SWAGING BIT	1
S1012	1/2" SWAGING BIT	1
S1058	5/8" SWAGING BIT	1
S1034	3/4" SWAGING BIT	1
S1078	7/8" SWAGING BIT	1
FLARING SETS		
F4000	4-PC FLARING SET 1/4" - 5/8"	8
F5000	5-PC FLARING SET 1/4" - 3/4"	8
F6000	6-PC FLARING SET 1/4" - 7/8"	8



Flaring/Plumbing

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
INDIVIDUAL BITS		
P1012	1/2" FLARING/PLUMBING BIT	1
P1034	3/4" FLARING/PLUMBING BIT	1
P1100	1" FLARING/PLUMBING BIT	1
PLUMBING SET		
P3000	3 PC PLUMBING SET	50



P3000

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

A2L Brass Manifold Kit

hilmor®



The hilmor® 2-Valve Basic Manifold with 60" Hoses provides all the features you've come to expect from a standard manifold, and then some. It has a durable design, improved accessibility and smart functionality. The 3-1/8" gauges have been optimized for greater readability with improved graphics, high-contrast color and glow-in-the-dark functionality. Sold with hilmor® 60" hoses.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
1932651	BRASS BASIC MANIFOLD R454B, R32, R410A, PSI, F, 3X60 HOSES	1

INCLUDED WITH KIT:

ITEM	DESCRIPTION
1839064	A2L GAUGE 80MM R454B, R32, R410A PSI, OF LOW
1839085	A2L GAUGE 80MM R454B, R32, R410A PSI, OF HIGH
A2L-LH	1/4 F SAE X 1/4 M LH FLARE A2L
1839160	60" HOSE - 3/8" VACUUM 1/4" & 3/8" ENDS

Manifold Gauge



CAT. NO.	DESCRIPTION	CASE QTY
MG-1	MANIFOLD GAUGE AND HOSE SET	10

DiversiTech's MG-1 Manifold Gauge provides the technician with a precision diagnostic and monitoring analog gauge set complete with hoses.

- The Manifold Gauge and Hose Set includes:
 - 2 valve brass manifold
 - 5' long high pressure hose set
- For use with the following refrigerants:
 - R-410A
 - R-22
 - R-407C
- Detailed gauge readings in PSI °F

Multi Color Test Leads



- Easy to use multi-colored test leads
- 5 colors (white, red, black, yellow, green)
- 2 connections each for easy testing on the job
- Wire is 18 gauge
- 18" long

CAT. NO.	DESCRIPTION	CASE QTY
CT800	MULTI COLOR TEST LEADS	150

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Map-Pro and Propane Gas



- Map-Pro and Propane Gas are tanks that can be used to weld products

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
525-MTI	MAP-PRO GAS - 14 OZ.	12
525-PTI	PROPANE GAS - 14.1 OZ.	12

Portable Hand Torch



- Self igniting hand torch eliminates the need for a flint lighter.
- Lightweight and portable.
- Can be operated with Propane or MAP-Pro™ (Propylene).
- Features trigger lock with instant safety release.
- Full size comfort grip.
- 360° swivel tip.
- Operates in any position, even upside down.
- Includes swirl combustion tip end.

CAT. NO.	DESCRIPTION	CASE QTY
525-TORCH	PORTABLE HAND TORCH	25

The SWOOSH® Drain Gun®



GG-1



SG-1

- Each unit comes equipped with a tapered fitting to work on 3/8" - 3/4" drain openings
- Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
THE SWOOSH® DRAIN GUN®		
GG-1	DRAIN GUN® FOR A/C CONDENSATE LINES	1
GGC-12	SWOOSH® CO2 CARTRIDGES, PACK OF 12	1
SWOOSH® BIG SHOT™		
SG-1	DRAIN GUN® FOR A/C CONDENSATE LINES	1
SGC-12	SWOOSH® BIG SHOT™ CO2 CARTRIDGES	6

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

CoilJet® Backpack - Battery Powered Coil Cleaner



CJ-BKPK-S3D

CJ-BKPK-SG

CJ-BKPK-SF

TECHNICAL SPECIFICATIONS

OUTPUT PRESSURE	125 PSI (8.5 BAR)
FLOW RATE	0.7 GPM
COIL CAPACITY	UP TO 4" THICK
CAPACITY WATER	2.5 GAL.
CAPACITY CHEMICALS	3 BOTTLES, 16 OUNCES (473 ML) EACH
MOTOR	0.2 HP
BATTERY	12V, 12AH

The Next Generation of Portable Coil Cleaners

The CoilJet® CJ-BKPK is the next revolutionary step in rechargeable portable HVAC coil cleaners with the ability to clean, degrease and deodorize all in one portable unit.

Optional Equipment

Customize your coil cleaning needs with over 20 wands, extensions and accessories.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CJ-BKPK	COILJET® BACKPACK COIL CLEANER	1
CLEANERS		
CJ-BKPK-S3D	SPEEDY3D™	1
CJ-BKPK-SG	SPEEDYGREEN™	1
CJ-BKPK-SF	SPEEDYFRESH™	1
CJ-BKPK-3NI	SPEEDY3D™, SPEEDYGREEN™, SPEEDYFRESH™ 3PK	4

CoilJet® CJ-125 HVAC Coil Cleaner System



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CJ-125	COILJET PORTABLE COIL CLEANER	1

No Water, No Power, No Problem

Ideal for cleaning coils in locations where water and power may be inaccessible, such as rooftops and attics.

Optional Equipment

Customize your coil cleaning needs with 20+ wands, extensions & nozzles.

TECHNICAL SPECIFICATIONS

OUTPUT PRESSURE	125 PSI (8.5 BAR)
FLOW RATE	0.7 GPM
CHEMICAL RATIO RANGE	30:1 - 4:1
COIL CAPACITY	UPTO 4" THICK
CAPACITY WATER	3.375 GAL.
CAPACITY CHEMICALS	0.4375 GAL.
MOTOR	0.2 HP
BATTERY	12V, 15AH

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

CoilJet® CJ-200E Electric Portable Coil Cleaner



Portable & Powerful Coil Cleaning

CoilJet 200E offers more pressure, continuous water supply and 110V convenience.

Optional Equipment

Customize your coil cleaning needs with over 20 wands, extensions and nozzles.

TECHNICAL SPECIFICATIONS

OUTPUT PRESSURE	220 PSI (15.1 BAR)
FLOW RATE	0.5 GPM
CHEMICAL RATIO RANGE	30:1 - 4:1
COIL CAPACITY	UP TO 4" THICK
CAPACITY WATER	3.375 GAL.
CAPACITY CHEMICALS	0.4375 GAL.
MOTOR	0.2 HP
INPUT POWER	115V, 60HZ, 1.5A
POWER CORD LENGTH	15'



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CJ-200E	COILJET PORTABLE COIL CLEANER	1

CoilShot® Condenser Cleaner Tool



The Future of Coil Cleaning

The unit connects directly to a garden hose and uses a single premeasured tablet to apply foaming coil cleaner directly to coils.

Optional Equipment

For added cleaning performance, use CoilShot® condenser cleaner with the optional 3' wand.

TECHNICAL SPECIFICATIONS

OUTPUT PRESSURE	UP TO 70 PSI
FLOW RATE	UP TO 3 GPM



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
SC-CS-100	COILSHOT® CONDENSER CLEANING TOOL	1
ACCESSORIES		
SC-CS-TABS	COILSHOT® TABLETS	
SC-CS-WAND	COILSHOT® WAND	

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Mini-Split Cleaning Assessor Kit



The SpeedClean[®] CJ-MSB-ACC-KIT Mini-Split Cleaning Assessor Kit. The kit includes a 24" wand with 90° spray head, a 12" flexible wand with 0° spray and 25° fan-spray nozzle. Mini-Split Bib Assessor Kit completely covers every aspect of the mini-split cleaning experience, designed for easier access and cleaning of the blower wheel and hard-to-reach dirt and debris. Works with the CoilJet Coil Cleaning System

CAT. NO.	DESCRIPTION	CASE QTY
CJ-MSB-ACC-KIT	MINI SPLIT ACCESSORY KIT	1

Mini-Split Bib[®] Kit 360



Clean In-Place Solution

The Mini-Split Bib Kit 360 is the most complete way to clean ductless mini-split coils, blower wheels and more. This kit allows you to safely and quickly clean virtually any mini-split system the correct way using pressurized water on coils, blower wheels, and more. The patented technology keeps water away from walls, ceilings, and other surroundings and directs it into the 5 gallon bucket for disposal, so it's clean and safe all around.

Included Equipment

Adhesive wrap, brackets, support rib, deflector plates, one piece 360 bib with 8 ft drain and a 5 gallon bucket.

TECHNICAL SPECIFICATIONS

FITS DUCTLESS FANS UP TO	44" WIDE
DRAIN LINE LENGTH	8'
BIB MATERIAL THICKNESS	4 MIL
DIMENSIONS	36" X 16"
WEIGHT	1.5 LBS

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
MSB-360-KIT	MINI-SPLIT BIB KIT 360	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Mini-Split Bib® Kit

Clean In-Place Solution

The fastest way to clean ductless mini-split coils, fans, and more. Safely clean virtually any mini-split system 30" to 44" the correct way- using pressurized water on the coils and fans. This patented technology keeps water away from walls and other surroundings while directing it into the 5 gallon bucket for disposal.

Included Equipment

Adhesive wrap, brackets, support rib, deflector plates, bib with 8 ft drain and a 5 gallon bucket.



TECHNICAL SPECIFICATIONS

FITS DUCTLESS FANS UP TO:	44" WIDE
DRAIN LINE LENGTH	8'
BIB MATERIAL THICKNESS	4 MIL
DIMENSIONS	36" X 16"
WEIGHT	1.5 LBS

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
MSB-KIT	MINI-SPLIT BIB KIT	1

Mini-Split Bib® Kit XL

Clean In-Place Solution

The MSB-KIT-XL Mini-Split Bib Kit for coils/ductless fan units between 45"-60" This kit is a fast way to clean larger commercial ductless mini-split coils, blower wheels and more. The patented technology fits ductless units and keeps water away from walls and other surroundings and directs it into the 5 gallon bucket for disposal, so it's clean and safe all around.

Included Equipment

Bib, adjustable mounting brackets, 1 roll of protective tape, 3 deflector plates and 5 gallon bucket.



TECHNICAL SPECIFICATIONS

FITS DUCT FAN UNITS	44" - 66" WIDE
DRAIN LINE LENGTH	8'
BIB MATERIAL THICKNESS	4 MIL
DIMENSIONS	52" X 16"
WEIGHT	1.5 LBS

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
MSB-KIT-XL	XL MINI-SPLIT BIB KIT	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Nylon Cable Ties



- Made from UL approved Nylon 6/6
- Normal service temperature range: -40° to 185°F (-40°C to 85°C)
- Flammability Rating: UL94V-2

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAXIMUM BUNDLE DIAMETER	BAG QTY	MASTER BAG QTY
20054	50	8"	0.179"	2.17"	100	1,000
20126	50	8"	0.181"	2.05"	1,000	-
20056	50	11"	0.187"	3.19"	100	1,000
20128	50	11"	0.189"	3.03"	1,000	-
20058	50	14-1/2"	0.187"	4.02"	100	1,000
20130	50	14-1/2"	0.189"	4.13"	1,000	-
20060	50	17"	0.187"	4.92"	100	100

Ultraviolet Black Nylon Cable Ties



- Carbonate 'A' added for greater resistance to Ultra Violet in outdoor usage
- Made from UL approved Nylon 6/6
- Normal service temperature range: -40°F to 185°F (-40°C to 85°C)
- Flammability Rating: UL94V-2

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAXIMUM BUNDLE DIAMETER	BAG QTY	MASTER BAG QTY
20236	40	8"	0.125"	2.17"	100	1,000
20254	50	8"	0.179"	2.17"	100	1,000
20166	50	8"	0.181"	2.05"	1,000	-
20256	50	11"	0.187"	3.19"	100	1,000
20168	50	11"	0.189"	3.03"	1,000	-
20258	50	14-1/2"	0.187"	4.02"	100	1,000
20170	50	14-1/2"	0.189"	4.13"	1,000	-
20260	50	17"	0.187"	4.92"	100	100
20282	175	17-3/4"	0.312"	5.24"	100	100
20285	175	24"	0.351"	7.28"	100	100
20286	175	30"	0.351"	9.29"	100	100
20287	175	36"	0.351"	10.63"	100	100
20289	175	48"	0.351"	14.96"	100	100
20292	250	11"	0.50"	3.19"	100	100
20294	250	21"	0.50"	6.54"	100	100
20298	250	40"	0.50"	12.48"	100	100

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com



Air Handling Cable Ties For Plenum Areas


- Meets UL 2043 for use in air handling spaces
- Generates low smoke & offers low heat release
- Burgundy Color
- 50 Lb. Tensile strength
- UL 62275 Listed Type 21 AH-2 for use in Air Handling Spaces (Plenums)



CAT. NO.	TENSILE STRENGTH (LBS.)	DIMENSIONS		MAX BUNDLE DIA.	BAG QTY	CASE QTY
		LENGTH	WIDTH			
20982	50	7.5"	0.19"	2"	100	5,000
20984	50	11"	0.19"	3"	100	5,000
20986	50	14.8"	0.19"	4"	100	5,000

Self-Adhesive Tie Mounts

- Designed to support light weight wire bundles when properly applied on any clean, smooth grease-free surface
- Four-sided design allows ties to be easily inserted from any angle
- For heavy support, mounting hole is provided for screws
- To apply, simply peel off backing paper from sticky mount and apply mount to surface. Cable ties can be inserted to secure wire bundles
- Made from UL approved Nylon 6/6, 94V-2



CAT. NO.	COLOR	MOUNT TYPE	BASE SIZE	CABLE TIE ACCEPTED	BAG QTY	MASTER BAG QTY
20355	NATURAL	(4) #8 SCREW HOLES	1.5" X 1.5"	0.390" WIDE	100	1,000
20359	UV BLACK	(4) #8 SCREW HOLES	1.5" X 1.5"	0.390" WIDE	100	1,000

Saddle Tie Mounts

- Saddle Design provides Maximum Stability to wire bundles
- To apply, simply fix mount with a screw and secure wire bundles with nylon cable ties
- Made from UL approved Nylon 6/6, 94V-2
- #8 Screw Accepted



CAT. NO.	DIMENSIONS			CABLE TIE ACCEPTED	BAG QTY	MASTER BAG QTY
	LENGTH	WIDTH	HEIGHT			
20351	0.748"	0.374"	0.197"	0.195" WIDE (50 LBS)	100	1,000
20358	0.600"	0.370"	0.270"	0.195" WIDE (50 LBS)	100	1,000
20360	1.00"	0.640"	0.420"	0.351" WIDE (120 LBS)	100	1,000
20350	1.18"	0.579"	0.457"	0.195" WIDE (50 LBS)	100	1,000

Images and Specifications may not be representative of all products listed.
For more information on The Morris Products Line visit: www.morrisproducts.com

Hose Clamps



- Stainless steel housings and bands
- The screws are plated steel and have slotted hex heads allowing a socket wrench, nut driver, or screwdriver to be used

CAT. NO.	DESCRIPTION	CASE QTY	ORDER MULTIPLE
B-4H	NO. 4, 7/32" - 5/8" DIA., 3/16" - 5/16" HOSE I.D.	10	10
B-6H	NO. 6, 3/8" - 7/8" DIA., 1/4" - 3/8" HOSE I.D.	10	10
B-8H	NO. 8, 7/16" - 1" DIA., 5/16" - 1/2" HOSE I.D.	10	10
B-10H	NO. 10, 9/16" - 1-1/16" DIA., 3/8" - 5/8" HOSE I.D.	10	10
B-12H	NO. 12, 9/16" - 1-1/4" DIA., 5/8" - 3/4" HOSE I.D.	10	10
B-16H	NO. 16, 11/16" - 1-1/2" DIA., 3/4" - 1" HOSE I.D.	10	10
B-20H	NO. 20, 3/4" - 1-3/4" DIA., 1" - 1-1/4" HOSE I.D.	10	10
B-24H	NO. 24, 1-1/16" - 2" DIA., 1-1/4" - 1-1/2" HOSE I.D.	10	10
B-28H	NO. 28, 1-5/16" - 2-1/4" DIA., 1-1/4" - 1-3/4" HOSE I.D.	10	10
B-32H	NO. 32, 1-9/16" - 2-1/2" DIA., 1-1/2" - 2" HOSE I.D.	10	10
B-36H	NO. 36, 1-13/16" - 2-3/4" DIA., 1-3/4" - 2-1/4" HOSE I.D.	10	10

Compressor Repair Kit Cartridges



- Fits Both Burned and Unburned Terminals
- Connects to Compressor Through Brass Cylinders
- 600 Volt, 65 Strand Machine Wire

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
TLC-3-8	3 WIRE, 8 GAUGE CONNECTION KIT	1
TLC-3-10	3 WIRE, 10 GAUGE CONNECTION KIT	1
TLC-3-12	3 WIRE, 12 GAUGE CONNECTION KIT	1

Concentric Vents



- Requires Only 1 Roof Penetration for High Efficiency Furnaces
- Simplifies Installation
- Conforms to ANSI/ASTM Standards

CAT. NO.	DESCRIPTION	CASE QTY
CVENT-2	2" CONCENTRIC VENT	1
CVENT-3	3" CONCENTRIC VENT	1
CVENT-4	4" CONCENTRIC VENT	1

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

Strapping Hanger Iron



- Galvanized 3/4 in. vent strapping, hanger iron, plumber's tape, pipe hanger tape and many other uses
- 1/4 in. centers for bolts or nails

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
710-A1710	10' ROLLS - 28 GAUGE	1
710-A1650	50' ROLLS - 28 GAUGE	1
710-A16100	100' ROLLS - 28 GAUGE	10

Duct Strap - Woven Polypropylene



- Webbed duct strap possessing high tensile and abrasion resistance
- Can be used for flex duct as it is easy to cut and staple to joists
- Chemical resistant
- Listed to spec 2040

CAT. NO.	DESCRIPTION	CASE QTY
710-100	DUCT STRAP - 1-3/4" X 100 YARDS - BLACK	24
710-102	DUCT STRAP - 3" X 100 YARDS - BLACK	8

Ratchet Strap



- Easy ratcheting permits tie-down of appliances securely
- An innovative latch and a fast release cam reduces socket wear
- Cadmium-plated steel buckle has a positive lock that eliminates release due to vibration
- When closed, the handle locks the latch into the sprocket to prevent inadvertent release
- 16' nylon webbing rated at 3000 PSI tensile
- Vinyl coated end hooks rated at 1200 PSI tensile

CAT. NO.	DESCRIPTION	CASE QTY
HS-192	RATCHET STRAP - 16'	3

Hanging Strap



- Strong, versatile, easy way to secure loose gear safely
- Tie down ladders, tubing, cylinders or almost anything in seconds
- Cannot snap back
- Strong, durable 1" polypropylene webbing
- Reinforced grommet lets you hang it up, tie it up, hook it up or attach it permanently
- Spring loaded adjustable buckle
- Easy to get firm tension with no slipping
- Make an endless length by connecting 2 or more together

CAT. NO.	DESCRIPTION	CASE QTY
HS-30	HANGING STRAP - 31"	24
HS-60	HANGING STRAP - 60"	24

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Sentry™ Refrigerant Locking Caps



RSC-RED-02-E



Updated
4-prong key
fits most
manufacturers

The Sentry™ Refrigerant Locking Caps are a quick and easy way to comply with the IRC and IMC codes requirement that all outdoor access ports on A/C and refrigerant equipment have to be tamper resistant. This cap is anodized in red color for easy identification of R-410 refrigerant. It is designed for 5/16" access ports typically used on mini-splits and European styles of A/C systems. An O-ring seal is also pre-installed to prevent leaks.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
RSC-RED-02-E	5/16" RED 2 PACK	
RSC-RED-04K-E	5/16" RED W/UNIVERSAL KEY 4 PACK	
RSC-RED-10-E	5/16" RED 10 PACK	
RSC-RED-50K-E	5/16" RED WITH 2 UNIVERSAL KEYS 50 PACK	

Brass Adapters



The MSA-3IF brass adaptor is used on mini-split systems that have a 5/16" fitting on the service valve. This adapter includes: valve core, cap with O-ring, 1/4" male flare X 5/16" UNF adapter, 3mil bag. Solid brass construction; 45° bend.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
MSA-3IF	1/4" MALE FLARE WITH 5/16" FEMALE UNF	

Access Fittings



VAX-5



The DiversiTech® VAX-5 5/16" OD extended copper tube is a convenient low-cost port for refrigeration servicing. It can be installed in any position on either high or low side for charging, purging, quick testing, or pressure checking. DiversiTech's access fittings have 1/4" SAE male flare access ports and include a quick seal cap and a stainless and brass special refrigerant valve core.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
VAX-5	AF, 5/16ODX1/4ID, PK OF 3	
VAX-5B	AF, EXTENDED CPR. TUBE, 5/16"	100
VTS-46	AF, S/T, 1/4" ODS, PK OF 3	
VTS-56	AF, S/T, 5/16" OD, PK OF 3	

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

25 Year Acrylic Latex Painter's Caulk

- For both interior and exterior use.
- Forms a tough, paintable resilient bond to all building material surfaces.
- Excellent resistance to water, weathering and moisture vapor.



CAT. NO.	DESCRIPTION	CASE QTY
7-4500	WHITE ACRYLIC LATEX CAULK - 10.1 OZ. CARTRIDGE	12

Foam Sealant - One Component

- One component closed-cell expanding polyurethane foam sealant for lineal caulking applications
- Air-moisture cure
- Tack free in 20 minutes; fully cured in 12 hours
- Paintable
- Use for insulating and sealing around windows, doors, pipes, ducts and vents
- Non-toxic when cured
- Paint to protect from UV exposure
- "R" value 4.7 (1" thickness)
- Foam contains fire retarding chemical and is U.L. Listed but not rated as a firestop product. Environmental concerns have led us to replace CFC's and HCFC's with hydrocarbon material in our one component foam products
- See instructions on each product to ensure safe use and quality results



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
01714M*	FOAM SEALANT - 12 OZ. CAN - YIELDS 275' (3/8" BEAD)	12

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

Black Jack[®] Roof Cement

Black Jack[®] All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
RM-10	BLACK JACK ALL WEATHER ROOF CEMENT - 10 OZ. TUBE	12
RM-1Q	BLACK JACK ALL WEATHER ROOF CEMENT - 1 QUART	6
RM-1G	BLACK JACK ALL WEATHER ROOF CEMENT - 1 GALLON	6

DiversiGum Duct Seal

- Non-hardening
- For plugging openings through foundations or around refrigeration tube entry



CAT. NO.	DESCRIPTION	CASE QTY
6-202-1	DIVERSIGUM DUCT SEAL - 1 LB. SLUG	24

Pro-Air Duct Sealant UL 181 AM-BM Listed

- Water-based fiber-reinforced duct sealant/mastic formulated for indoor/outdoor use
- Meets U.L. Class I rating
- Use on metal heating, ventilating, and A/C duct systems; as well as fiberglass duct board systems and flex duct systems



CAT. NO.	DESCRIPTION	CASE QTY
800-009	PRO-AIR DUCT SEALANT - 1 GALLON PAIL	4

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech[®] products please visit www.diversitech.com

General Purpose Vinyl Electrical Tape



- 3/4" X 60ft X 7Mil
- Used for Protective Jacketing & Bundling/Harnessing
- Resistant to Acids, Alkalis, Chemicals, Oils, Moisture, Sunlight & Corrosion
- Flame Retardant and Weather Resistant
- UL 510 & CSA Approved
- Lead Free
- 600V

COMPARABLE TO 3M 1700

CAT. NO.	COLOR	PACKAGE TYPE	SLEEVE QTY	CASE QTY
60000	BLACK	CELLO	10	100
60010	RED	CELLO	10	100
60020	WHITE	CELLO	10	100
60030	YELLOW	CELLO	10	100
60040	GREEN	CELLO	10	100
60050	BLUE	CELLO	10	100
60060	BROWN	CELLO	10	100
60070	ORANGE	CELLO	10	100
60080	GRAY	CELLO	10	100
60090	VIOLET	CELLO	10	100

Stick-E-Tape



- Self adhesive aluminum tape with temperature range of 40° F to 200° F
- Easily painted
- Excellent vapor barrier
- Effective UV and water shield over urethane foam
- Preferred duct and pipe wrap

CAT. NO.	DESCRIPTION	CASE QTY
50302M*	STICK-E-TAPE - AFT-70I-2 - 2" X 50' ROLL	24

*M SUFFIX IS FOR MORRIS PART NUMBERS. WHEN SEARCHING ON THE DIVERSITECH WEBSITE REMOVE THE M

PTFE Tape



- Made of pure white PTFE
- Non toxic
- For use with chemicals, solvents, oxygen, and on food lines
- Withstands up to 2000 psi of pressure

CAT. NO.	DESCRIPTION	CASE QTY
6-733	TEFLON TAPE - 1/2" X 520"	100

Foam Insulation Tape

- Superior self-adhesive foam tape can be used on hot or cold pipes
- Fits well around valves and fittings.
- Easily cut and molded



CAT. NO.	DESCRIPTION	CASE QTY
6-9718	1/8" X 2" X 30' ROLL - BLACK	12

Flex Duct Tape



- Specially designed to meet new UL1818 FX code for flex duct, for superior performance in extreme environments (35° F to 260° F)
- Higher adhesion and tack than traditional cloth duct tapes
- Conformable, hand tearable foil
- 3 mil thickness
- 2" X 120 yds
- Code identification printed on the tape
- Acrylic adhesive

CAT. NO.	DESCRIPTION	CASE QTY
640-FD2S	SILVER - 2"	24
640-FD3S	SILVER - 3"	16

Aluminum Foil Tape



- Prevents heating and cooling losses
- Blocks odors and moisture
- Use for HVAC and refrigeration systems
- Easy to handle
- 35° F to plus 260° F working temperatures
- 3-5 year shelf life
- Made in USA

CAT. NO.	DESCRIPTION	CASE QTY
640-AF2	2" 50 YDS.	24

Cork Insulation Tape

- Adheres firmly to all metals.
- Use on hot or cold pipes to stop condensation and drips



CAT. NO.	DESCRIPTION	CASE QTY
6-330	1/8" X 2" X 30' ROLL - BLACK	12

Sure-Stick Heavy Duty Adhesive Spray



- Wide web spray adhesive ideal for both temporary or permanent bonding
- Waterproof, transparent and non-staining
- Use for the toughest adhesive applications with leather, cardboard, most plastics, polyethylene sheeting and insulation in HVAC applications
- Cleans with mineral spirits
- Not for use on vinyl

CAT. NO.	DESCRIPTION	CASE QTY
315-20	12 OZ. AEROSOL	12

QD[®] Contact Cleaner

- Suitable for cleaning sensitive electronics and electrical equipment and does not leave any residue.
- Evaporates quickly and safe to use on all plastics.
- More useful where lower flashpoint cleaners are acceptable.
- NSF K2 Registered.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CRC-4CF	QD [®] CONTACT CLEANER - 11 OZ.	12

HF[™] Contact Cleaner

- Petroleum distillate based precision cleaner with a flash point of 205°F.
- Alternative to CFCs when applications require higher flashpoints.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
CRC-4-140	HF [™] CONTACT CLEANER - 11 OZ.	12

White Lithium Grease

- White Lithium Grease has superior lubrication and durability in any weather or temperature.
- Useful as a break in lubricant for bearings.
- General purpose lubricant and corrosion inhibitor for tools, machinery and equipment.



CAT. NO.	SIZE	ORDER MULTIPLE
CRC-9	10 OZ.	12

Ultra Lite 3-36[®] Ultra Thin Non Staining Lubricant

- Ultra thin, non staining lubricant that resists oil, dirt and dust build up.
- Seals out moisture and protects against corrosion.
- Excellent for drying out electrical components.



CAT. NO.	SIZE	ORDER MULTIPLE
CRC-1	11 OZ.	12

WD-40[®]

- Loosens rusted parts.
- Stops squeaks.
- Removes tar, grease and adhesives.
- Displaces moisture.
- Protects metal.
- New Smart Straw can.



CAT. NO.	SIZE	ORDER MULTIPLE
74I-001	WD-40 - 8 OZ.	12
74I-002	WD-40 - 11 OZ.	12

Zinc-It[®] Instant Cold Galvanize[™] Zinc Rich Galvanize Coating

- High-performance zinc coating that electrochemically bonds with ferrous metals to form a galvanic cell.
- Fights rust and corrosion and can be used as a touch-up for damaged galvanized coatings.
- Dries quickly.



CAT. NO.	SIZE	ORDER MULTIPLE
CRC-5	13 OZ.	12

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech[®] products please visit www.diversitech.com

Terry Towels



- 100% cotton
- Minimum of 14" x 17"
- Pre-Washed for absorbency
- Fully-hemmed
- All-white
- Reusable

CAT. NO.	DESCRIPTION	CASE QTY
DTT-10	TERRY TOWELS, PACK OF 10	10
DTT-24	TERRY TOWELS, PACK OF 24	8

Shop Towels



- Heavy duty reusable towels
- For wipe ups of grease, oil water, etc.
- 100% cotton material is pre-shrunk and hemmed
- Each towel measures 13" x 16"

CAT. NO.	DESCRIPTION	CASE QTY
ST-4	SHOP TOWELS, PACK OF 4	64
ST-10	SHOP TOWELS, PACK OF 10	25

WypAll ShopPro X80 Towels



- Engineered to feel like cloth and work even better.
- Absorbs more oil and water faster pound for pound than laundered shop towels
- Heavy duty

CAT. NO.	DESCRIPTION	CASE QTY
5-4104I	WYPALL SHOPPRO X80 TOWELS, PACK OF 160	1

Workhorse[®] Manufactured Rags



- The economical alternative to scrap rags.
- Made from Kimberly-Clark's advanced new material - Hydroknit[®].
- Durable, rag tough construction stands up to any task.
- Can be re-used time and time again.
- Available in white or blue.

CAT. NO.	DESCRIPTION	CASE QTY
5-41455	9-3/4" X 16-3/4" WHITE, PACK OF 100	10
5-4141I	9-3/4" X 16-3/4" BLUE, PACK OF 100	10

Kimberly-Clark Waterless Hand Wipes

- These wipes go wherever hands go to get dirty.
- Full sized 12" x 12" wipes for full sized cleaning.
- Natural cleaning agent is tough on grease, grime, ink, and paint.
- Dual Textured.
- 75 count bucket.



CAT. NO.	SIZE	CASE QTY
5-42272	BUCKET	6

Teri[®] Towels



- Multi-ply tissue reinforced with nylon webbing for added strength on the job.
- Made from 100% recycled paper.
- Size: 9-3/4" x 16-3/4"
- Color: White.
- Comes in a convenient pop up box.
- 118 towels/box.
- 10 boxes/case.

CAT. NO.	DESCRIPTION	CASE QTY
5-34790	TERI REINFORCED TOWELS, PACK OF 118	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Shoe Covers *Fast Orange® Hand Cleaner*

Slip these shoe covers on in seconds to protect carpet, tile, or wood from dirt and scuff marks. Customers will appreciate your professional appearance.



CAT. NO.	DESCRIPTION	CASE QTY
SC-IWP	WATERPROOF SHOE COVERS, PACK OF 50 PAIRS	10

Wasp & Hornet Killer by ENFORCER

- 20-foot jet blast for instant knockdown of wasps, hornets, and yellow jackets.
- Blanketing foam that plugs yellow jacket holes and clings to wasp and hornet nests, preventing their escape.



8-WHI6

8-FWHI6

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
8-WHI6	ENFORCER WASP & HORNET KILLER - 16 OZ. AEROSOL	12
8-FWHI6	ENFORCER WASP & YELLOW JACKET FOAM - 16 OZ. AEROSOL	12

High Heat Spray Paint

- Ultra high temperature coating formulated to resist temperatures up to 1300°F.
- Great for use on boilers, furnaces, steam pipes, chimney collars, compressors and engine manifolds.
- Meets most recent VOC legislation and is currently compliant.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
799-04I	BLACK - 12 OZ.	6

- Three out of five people prefer Fast Orange® over other hand cleaners.
- Biodegradable.
- Waterless.
- Aloe, lanolin, and jojoba.
- Smooth lotion and extra-fine pumice available.
- USDA Approved.



THCO-7



THCO-15

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
HCO-7	7-1/2 FL. OZ. SMOOTH SQUEEZE BOTTLE	12
HCO-15	15 OZ. SMOOTH SQUEEZE BOTTLE	12
HCP-7	7-1/2 FL. OZ. PUMICE SQUEEZE BOTTLE	12
HCP-15	15 OZ. PUMICE SQUEEZE BOTTLE	12

BBJ MMR II Mold & Mildew Remover/Disinfectant

Meets EPA Emerging Pathogen Guidelines. Powerful disinfectant and mold remover. MMR-II is a commercial-grade non-porous surface cleaner and broad-spectrum disinfectant combined in one powerful product. Clean and sanitize in one step. Disinfects, and removes unsightly mold streaks on walls, ceilings, diffusers, and other hard surfaces, and kills mold in HVAC systems.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
620-0I	DISINFECTANT, 32 OZ. SPRAY BOTTLE	12

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech® products please visit www.diversitech.com

Triple-D[®] Universal Coil Cleaner



- Universal coil cleaner that can be used on condensers, evaporators, microchannels, roof-top units, and mini-split applications
- Triple active synergistic highly effective solution is formulated to remove a broad range of soils while degreasing and deodorizing
- Ideal for cleaning most metals
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
TRIPLE-D	1 GALLON CONCENTRATE	4
TRIPLE-D-4X	4X CONCENTRATE	12
TRIPLE-D-1SHOT	4 OZ. CONCENTRATE	14
TRIPLE-D-AER	19 OZ. AEROSOL CAN	12
TRIPLE-D-AER-6	19 OZ. AEROSOL CAN/6 PACK	6
TRIPLE-D-RTU	1 QUART PRE-MIXED SPRAYER	12

Pro-Green[®]



- No rinse, mild alkaline coil cleaner
- Use on air-cooled condensers, evaporators, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications
- NSF approved for use in federally inspected plants

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-GREEN	1 GALLON CONTAINER	4
PRO-GREEN-AER	19OZ AEROSOL	6

Pro-Yellow[®]



- Powerful cleaner
- Ideal for condensers, microchannels, and mini-splits that targets large concentrations of dirt and grime
- Heavy foaming alkaline-based solution
- Debris will be removed from the coil while providing excellent brightening.
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-YELLOW	1 GALLON CONTAINER	4

Pro-Blue[®]



- Heavy foaming alkaline-based solution designed for condensers, microchannels, and mini-splits
- Penetrates dirt and grease removing deposits resulting in clean and brightened coils
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-BLUE	1 GALLON CONTAINER	4
PRO-BLUE-AER	19OZ AEROSOL	6

Pro-Brown[®]



- Heavy duty alkaline cleaner that pulls out deeply embedded dirt removing greasy soils and oxidation while brightening and cleaning coils
- Ideal for air-cooled condensers, microchannels, and mini-splits thanks to its dual action foaming capabilities
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-BROWN	1 GALLON CONTAINER	4

Pro-Red Plus[®]



- Fast acting cleaning solution
- For condensers, microchannels, and mini-splits
- Foams and lifts away stubborn deposits including tarnish and corrosion
- Non-acid formula is as effective as conventional acid cleaners without the use of hydrofluoric acid
- Vigorous foaming action eliminates the need for prolonged soaking, steam cleaning or scrubbing coils without emitting corrosive fumes or rusting ferrous metals
- Biodegradable and NSF approved

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-RED+	1 GALLON CONTAINER	4

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Pro-Kleen[®]

- Unique foaming acid coil cleaner
- Designed to replace hazardous hydrofluoric acid coil cleaners
- Contains a synergistic combination of mineral acids, corrosion inhibitors, biodegradable surfactants, penetrants, and degreasers that emulsify, solubilize and neutralize soils leaving a clean, bright, efficient coil surface
- Easy-rinse formula removes a broad range of soils
- Does not contain dangerous hydrofluoric or bipotassium phosphate



Eco-Coil[™] Environmentally Friendly Coil Cleaner

- Environmentally friendly no rinse non-corrosive cleaner ideal for evaporator and condenser coils, electronic and permanent filters, fan blades, grilles, mini-split and microchannel applications
- Tested to provide the highest level of performance, Eco-Coil not only reduces the number of products required to clean but also has different water mixture ratios to maximize solution usage
- Biodegradable and NSF approved



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-KLEEN	1 GALLON CONTAINER	4

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
ECO-COIL	1 GALLON CONTAINER	4

SpeedyFoam[®] Condenser Coil Cleaner

Power Cleaner

This cleaner cleans even the dirtiest, greasiest coils, but is safe on coils and safer for you and your co-workers.

Ultra Foaming

SpeedyFoam has an ultra foaming micro bubble action that moves deep into coils to lift and flush dirt and debris.



TECHNICAL SPECIFICATIONS

APPEARANCE	PURPLE
ODOR	LEMON SCENT

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
SC-FCC-1	SPEEDYFOAM [®] CONDENSER CLEANING SOLUTION	4

Foam-Plus[™] Aerosol Foaming Coil Cleaner

- Heavy-duty foaming detergent coil cleaner in an aerosol can
- Non-flammable and water-based with no chlorinated solvents
- Blasting foam stream reaches into tight areas for maximum cleaning
- Foaming alkaline detergent quickly liquifies dirt, grease, oil or other residue and is completely self-rinsing on condensate producing coils



CAT. NO.	SIZE	ORDER MULTIPLE
358-20	19 OZ.	12

BBJ Ductless Mini-Split First Aid Kit



The complete BBJ Ductless Mini-Split First Aid Kit contains everything you need to clean and sanitize a mini split system. Each kit contains Micro Coil cleaner, an easy to use non-caustic coil cleaner, and the EPA registered Mold Control for HVAC Systems and Air Ducts.

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
700-01	MINI-SPLIT FIRST AID KIT - MOLD CONTROL & MICRO COIL CLEAN	6
SOLD INDIVIDUALLY		
490-01	MOLD CONTROL HVAC/DUCTS SPRAY - 14 OZ. AEROSOL	6
505-01	MICRO COIL CLEAN - 17 OZ. AEROSOL	6
510-01	MICRO COIL CLEAN - 64 OZ. BOTTLE	4

Pro-Flush® HVAC Flushing Solvent



- A flushing solvent for A/C and refrigeration systems
- Formulated for R410A retrofits, refrigerant conversions and compressor burnouts
- Compatible with all refrigerants and compressor oils
- All solvents in Pro-Flush® are non VOC and conform to EPA SNAP standards: low toxicity and residue free
- The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for one stop servicing
- The kit includes: 8 oz. container of Pro-Flush® solvent, refillable Pro-Flush® injector tool pressure tank, pressure relief valve for added safety
- Large rubber adapter that flushes up to 1-1/4" line sets
- Service hose included

CAT. NO.	DESCRIPTION	CASE QTY
PF-KIT	PRO-FLUSH® KIT - INJECTOR, 8 OZ. REFILL, NOZZLE ADAPTER AND HOSE	3
PF-16	PRO-FLUSH® HVAC FLUSHING SOLVENT - 16 OZ. REFILL	6

PAN-PATCH™



- Pan-Patch™ is a two part epoxy coating with anti-microbial additives designed for HVAC applications. A self leveling formula that is ideal in a damp or wet environment
- Resists corrosion and stops pan leaks without replacing the pan.
- Light gray in color
- One gallon covers about 160 square feet with 10 mil thickness

CAT. NO.	SIZE	ORDER MULTIPLE
PANPATCH	1 GALLON	4

Leak Armor™ HVAC/R Leak Seal Kit

- Easy Shot™ can and hose with self-piercing valve for simple delivery
- Eliminates moisture and seals systems to stop and prevent leaks
- Installs quickly with no pump down or recovery
- Compatible with all oils and refrigerants
- Great for all systems including microchannel, heat pump and geothermal
- Compatible with units up to 12 Tons



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
944KIT	LEAK ARMOR HVAC/R LEAK SEAL KIT	12

Leak Armor™ HVAC/R Leak Sealant with Dye Kit

- Easy Shot™ can and hose with self-piercing valve for simple delivery
- Includes UV dye for complete repair system
- Eliminates moisture and seals systems to stop and prevent leaks
- Installs quickly with no pump down or recovery
- Compatible with all oils and refrigerants
- Great for all systems including microchannel, heat pump and geothermal
- Compatible with units up to 12 Tons



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
972KIT	LEAK ARMOR HVAC/R LEAK SEALANT WITH DYE KIT	12

Leak Armor™ Leak Sealant & Moisture Eliminator

- Leak Sealant and Moisture Eliminator in one
- Save time and money with one simple application
- Available in Single Use, Single Pack and 4-Pack
- Compatible with units up to 12 Tons



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
985	SUPER SEAL FLEX INJECT™	6

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com

Pro-Bubble[®] Leak Detector



- Easy-to-use
- High bubbling
- Viscoelastic blue leak detector

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
PRO-BUBBLE-32	32 OZ. BOTTLE WITH SPRAY TOP	12

Leak Armor[™] UV Leak Detection & Sealant Kit



- Single use leak sealant and moisture scavenger with UV leak detecting dye in easy to use cartridge
- No tools or gauges required
- Works with all compressors, heat pumps & condensers
- Flex Shot Leak Armor UV

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
995S-MC	UV LEAK DETECTION & SEALANT KIT	6

Leak Armor[™] Super Change[™]



- Links mineral/AB oil to any PDE/HFC refrigerant oil
- Eliminates oil change out
- Replaces R-22 line set conversion flush
- Boosts system efficiency
- Won't plug TXVs or cap tubes or pistons
- Compatible with units up to 6 Tons (can) and 12 Tons (bag)

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
98I	SUPER CHANGE - UP TO 6 TONS	6
99I-MC	SUPER CHANGE RETOFIT KIT W/ HOSE	4

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech[®] distribution centers and may incur longer lead times

Mini UV LED[®] Mini-Split System



TUV-MINI-LED-SW

FRESH-AIRE UV
The Indoor Air Quality Expert

Mini UV LED[®] is the first-of-its-kind UV light LED system for mini-splits and similar limited space applications. Like all A/C systems, mini-splits are prone to internal mold growth and microbial contamination, particularly on and near the blower wheel. The LED light strip in Mini UV LED[®] is designed to disinfect surfaces while having no impact on plastic materials.



CAT. NO.	DESCRIPTION	ORDER MULTIPLE
TUV-MINI-LED-SW	UV LIGHT LED SYSTEM FOR MINI-SPLITS	1

Images and Specifications may not be representative of all products listed. For the full range of DiversiTech[®] products please visit www.diversitech.com



800 Series



- Simple Private Label Badge System
- Blue Back Light
- Easy Wire Color Coded Terminal Blocks
- Battery or 24-Volt Power
- Separate Heating and Cooling Swing
- 5 Year Warranty

CAT. NO.	DESCRIPTION	CASE QTY
T855	UNIVERSAL RESIDENTIAL/LIGHT COMMERCIAL THERMOSTAT	10

700 Series



T701



T705



T721



T755

- Simple Private Label Badge System
- Blue Back Light
- Easy Wire Color Coded Terminal Blocks
- Battery or 24-Volt Power
- Separate Heating and Cooling Swing
- 5 Year Warranty

CAT. NO.	DESCRIPTION	CASE QTY
T701	SINGLE STAGE NON-PROGRAMMABLE THERMOSTAT	10
T705	SINGLE STAGE PROGRAMMABLE THERMOSTAT	10
T721	HEAT PUMP / CONVENTIONAL THERMOSTAT	10
T755	UNIVERSAL THERMOSTAT	10

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times



Wifi Thermostats

- Exclusively for HVAC professionals
- T855iSH is Compatible with every PRO1 subbase
- T72li is Compatible with any 2H/1C Heat Pump or 1H/1C Conventional PRO1 subbase
- T70li is Compatible with any 1H/1C Conventional PRO1 subbase



T855iSH




T75li, T72li, T70li

CAT. NO.	HEAT AND COOL STAGES	POWER SOURCE	PROGRAMMING	CASE QTY
T855iSH	UP TO 2 HEAT, 2 COOL CONVENTIONAL UP TO 5 HEAT, 3 COOL HEAT PUMP	HARDWIRE ONLY	7 DAY OR NON-PROGRAMMABLE	10
T75li	2 HEAT, 2 COOL HEAT PUMP 4 HEAT, 2 COOL CONVENTIONAL	HARDWIRE ONLY	PROGRAMMABLE THROUGH APP	10
T72li	2 HEAT, 1 COOL HEAT PUMP 1 HEAT, 1 COOL CONVENTIONAL	HARDWIRE ONLY	PROGRAMMABLE THROUGH APP	10
T70li	1 HEAT, 1 COOL ONLY	HARDWIRE ONLY	PROGRAMMABLE THROUGH APP	10

PRO1 Thermostat Guard

- Fits on every PRO1 thermostat
- Fits over an installed thermostat
- Includes 2 keys



CAT. NO.	WORKS WITH	DIMENSIONS			CASE QTY
		HEIGHT	WIDTH	DEPTH	
T150	ALL PRO1 THERMOSTATS	6.25"	3.25	8.25"	5

Plastic Thermostat Guards

- Used to prevent tampering with thermostats
- Covers are clear, allowing complete view of the thermostat and current settings
- Includes vent holes for easy airflow across the thermostat
- Lockable with universal key
- Includes mounting screws and key



585-TG1

CAT. NO.	DESCRIPTION	T-STAT CLEARANCE	CASE QTY
585-TG	CLEAR PLASTIC W/TWO BASES	8-1/4" X 4-1/2" X 3-1/4"	18
585-TG1	CLEAR PLASTIC W/TWO BASES	5-3/4" X 3-1/2" X 2-3/4"	18
585-TG6	CLEAR PLASTIC W/TWO BASES	6-1/4" X 3-3/4" X 1-3/4"	18
585-F336	KEY FOR THERMOSTAT GUARD	-	1

Images and Specifications may not be representative of all products listed.
For the full range of DiversiTech® products please visit www.diversitech.com



Cielo Breez Edge Pro



A premium smart thermostat designed for advanced control of mini-split systems.

Display: Full Touch Screen Color LCD Display

Supports: Mini-Split, PTAC, Window & Portable Air Conditioners & Heat Pumps that have an IR remote.

Smart Home Compatibility: Alexa, Google, Siri Shortcuts, IFTTT, SmartThings, Cielo Linked

Special Features: 7-day Scheduling; Near-Field Sensing; Multi-Zone Mode Conflict Control; AI-Powered Comfy Max; Comfy Temperature & Humidity Range Control; Pin Lock; AI-Driven Auto-Remote Detection; Follow Me; Freeze Protection; Turbo Mode; Comprehensive Usage History & Timeline of Actions; Air Filter Notifications; On-Device 7-Day Weather Display; Presets (Home, Away, Sleep, Pets); Geofencing for Location-Based Controls

Apps: Free Apps (iOS, Android, Web), No Subscriptions

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
EDIOIWA	PREMIUM SMART THERMOSTAT FOR DUCTLESS SYSTEMS BLACK	

Cielo Breez Max



A high-performance smart thermostat for seamless mini-split air-conditioning management.

Display: Crisp Display with On-Device Controls

Supports: Mini-Split, PTAC, Window & Portable Air Conditioners & Heat Pumps that have an IR remote.

Smart Home Compatibility: Alexa, Google, Siri Shortcuts, IFTTT, SmartThings, Cielo Linked

Special Features: 7-day Scheduling; Follow Me; Multi-Zone Mode Conflict Control; Freeze Protection; Turbo Mode; AI-Powered Comfy Max; AI-Driven Auto-Remote Detection; Comfy Temperature & Humidity Range Control; Comprehensive Usage History & Timeline of Actions; Air Filter Notifications; Presets (Home, Away, Sleep); Geofencing for Location-Based Controls

Apps: Free Apps (iOS, Android, Web), No Subscriptions

CAT. NO.	DESCRIPTION	ORDER MULTIPLE
BMI01WA	SMART THERMOSTAT FOR DUCTLESS SYSTEMS BLACK	
BMI02WA	SMART THERMOSTAT FOR DUCTLESS SYSTEMS WHITE	

NOTE: Catalog numbers in **RED** indicate products that are stocked at DiversiTech® distribution centers and may incur longer lead times

FITTINGS *Featuring* NEW PVC



GFCI AND USB WIRING DEVICES



NEW GFCIs
IVORY, WHITE & LIGHT ALMOND
UL Listed
Compact Design



USB WALL OUTLETS
Type A and C
30 WATTS

ELECTRICAL BOXES

Get everything you need from SmarToggle old-work plastic boxes to weatherproof covers.



INSULATED CONNECTORS

Now Service Entrance Rated

CONNECTORS & GROUNDING



WIRE MANAGEMENT



CONNECTORS



WIRING DEVICES



FITTINGS



MORRIS PRODUCTS INC.
53 CAREY ROAD
QUEENSBURY, NY 12804
INFO@MORRISPRODUCTS.COM
1.888.777.6678



YOU NEED IT
WE'VE GOT IT

MORRISPRODUCTS.COM

MAY 2026

CAT# 00016